L-force catalogue

Automation systems
Drive solutions

Controls
Inverters
Motors
Gearboxes
Engineering Tools

Automation systems: Controller-based Automation

Controls: Controller 3200 C, Controller c300, Controller p500, Controller p300, I/O system 1000, Monitor Panel

Inverters: Servo Inverters i700

Engineering Tools: PLC Designer, VisiWinNET®

Lenze
As easy as that.

Contents of the L-force catalogue

About Lenze		Lenze makes many things easy for you.	
		A matter of principle: the right products for every application.	
		L-force product portfolio	
Automation systems		Controller-based Automation	1.1
		Drive-based automation	1.2
Drive solutions		HighLine tasks	2.1
		StateLine tasks	2.2
		BaseLine tasks	2.3
Controls	Cabinet Controller	Controller 3200 C	3.1
		Controller c300	3.2
	Panel Controller	Controller p500	3.3
		Controller p300	3.4
	'	I/O system 1000	3.5
		Monitor Panel	3.6
Inverters	Decentralised	Inverter Drives 8400 protec	4.1
		Inverter Drives 8400 motec	4.2
	Cabinet	Servo Drives 9400 HighLine	4.4
		Inverter Drives 8400 TopLine	4.5
		Servo Inverters i700	4.6
		Inverter Drives 8400 HighLine	4.7
		Inverter Drives 8400 StateLine	4.8
		Inverter Drives 8400 BaseLine	4.10
Motors	Servo motors	MCS synchronous servo motors	5.1
		MD□KS synchronous servo motors	5.2
		MQA asynchronous servo motors	5.3
		MCA asynchronous servo motors	5.4
	Three-phase AC motors	MF three-phase AC motors	5.5
		MH three-phase AC motors	5.6
		MD three-phase AC motors	5.7
		m300 Lenze Smart Motor	5.8
		MD/MH basic three-phase AC motors	5.9
Gearboxes	Axial gearbox	g700-P planetary gearbox	6.1
		MPR/MPG planetary gearboxes	6.2
		g500-H helical gearbox	6.3
		GST helical gearboxes	6.4
		g500-S shaft-mounted helical gearbox	6.5
		GFL shaft-mounted helical gearboxes	6.6
	Right-angle gearbox	g500-B bevel gearbox	6.7
		GKR bevel gearboxes	6.8
		GKS helical-bevel gearboxes	6.9
		GSS helical-worm gearboxes	6.10
	Motor data	Assignment see above	6.11
Engineering Tools		Navigator	7.1
		Drive Solution Designer	7.2
		Drive Solution Catalogue	7.3
		Engineer	7.4
		PLC Designer	7.5
		VisiWinNET®	7.6
		EASY Starter	7.7

Selected portfolio

Additional portfolio

Lenze makes many things easy for you.

With our motivated and committed approach, we work together with you to create the best possible solution and set your ideas in motion - whether you are looking to optimise an existing machine or develop a new one. We always strive to make things easy and seek perfection therein. This is anchored in our thinking, in our services and in every detail of our products. It's as easy as that!

1

Developing ideas

Are you looking to build the best machine possible and already have some initial ideas? Then get these down on paper together with us, starting with small innovative details and stretching all the way to completely new machines. Working together, we will develop an intelligent and sustainable concept that is perfectly aligned with your specific requirements.

2

Drafting concepts

We see welcome challenges in your machine tasks, supporting you with our comprehensive expertise and providing valuable impetus for your innovations. We take a holistic view of the individual motion and control functions here and draw up consistent, end-to-end drive and automation solutions for you - keeping everything as easy as possible and as extensive as necessary.

3

Implementing solutions

Our easy formula for satisfied customers is to establish an active partnership with fast decision-making processes and an individually tailored offer. We have been using this simple principle to meet the ever more specialised customer requirements in the field of mechanical engineering for many years.

4

Manufacturing machines

Functional diversity in perfect harmony: as one of the few full-range providers in the market, we can provide you with precisely those products that you actually need for any machine task – no more and no less. Our L-force product portfolio, a consistent platform for implementing drive and automation tasks, is invaluable in this regard.

5

Ensuring productivity

Productivity, reliability and new performance peaks on a daily basis – these are our key success factors for your machine. After delivery, we offer you cleverly devised service concepts to ensure continued safe operation. The primary focus here is on technical support, based on the excellent application expertise of our highly-skilled and knowledgeable after-sales team.


A matter of principle: the right products for every application.

Lenze's extensive L-force product portfolio follows a very simple principle. The functions of our finely scaled products are assigned to the three lines Base-Line, State-Line or High-Line.

But what does this mean for you? It allows you to quickly recognise which products represent the best solution for your own specific requirements.


Powerful products with a major impact:
- Easy handling
- High quality and durability
- Reliable technologies in tune with the latest developments

Lenze products undergo the most stringent testing in our own laboratory. This allows us to ensure that you will receive consistently high quality and a long service life. In addition to this, five logistics centres ensure that the Lenze products you select are available for quick delivery anywhere across the globe. It's as easy as that!

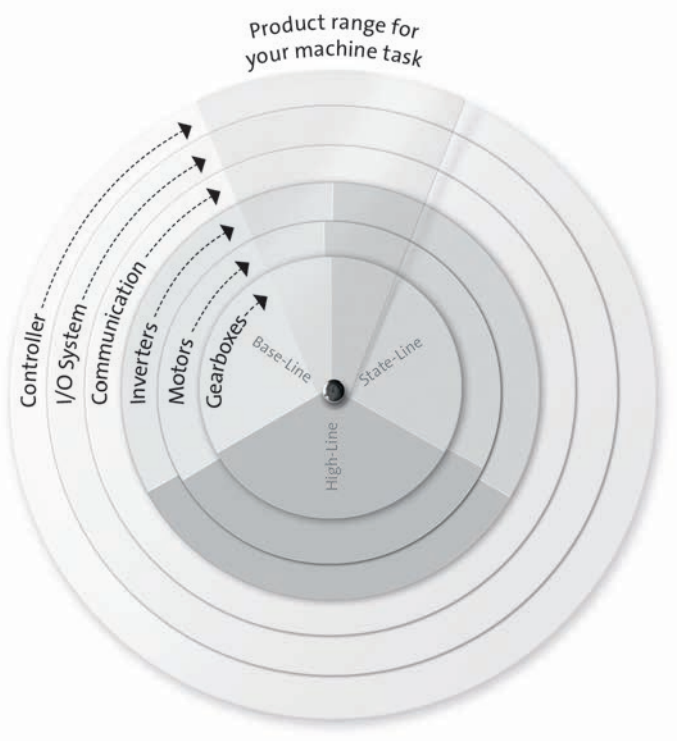


L-force product portfolio

Controls

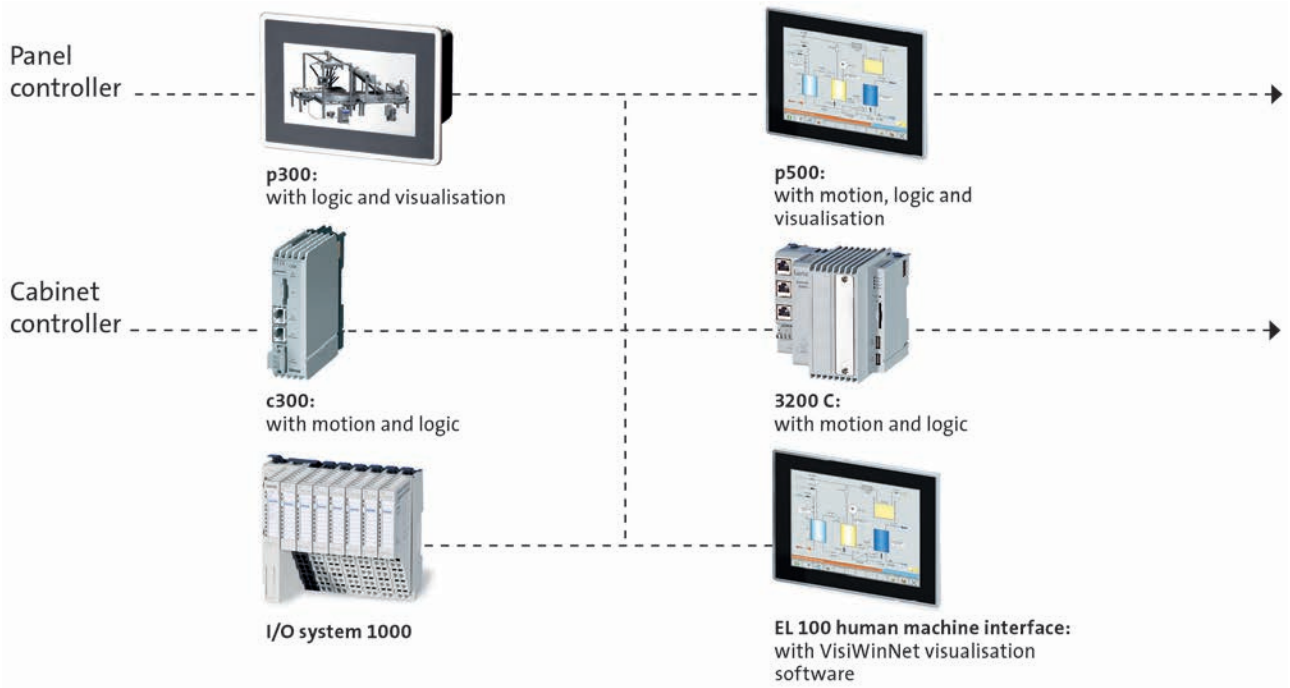


Engineering Tools

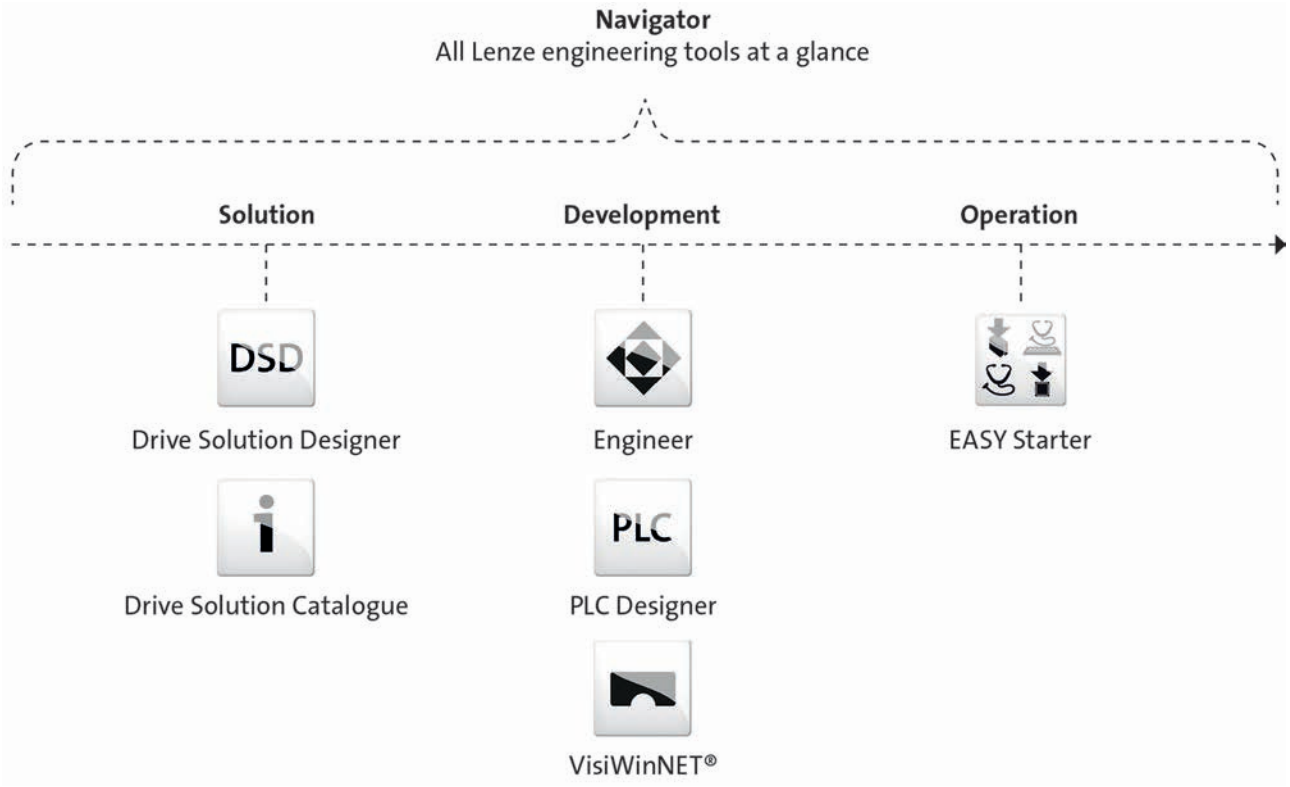

L-force product portfolio


Inverters

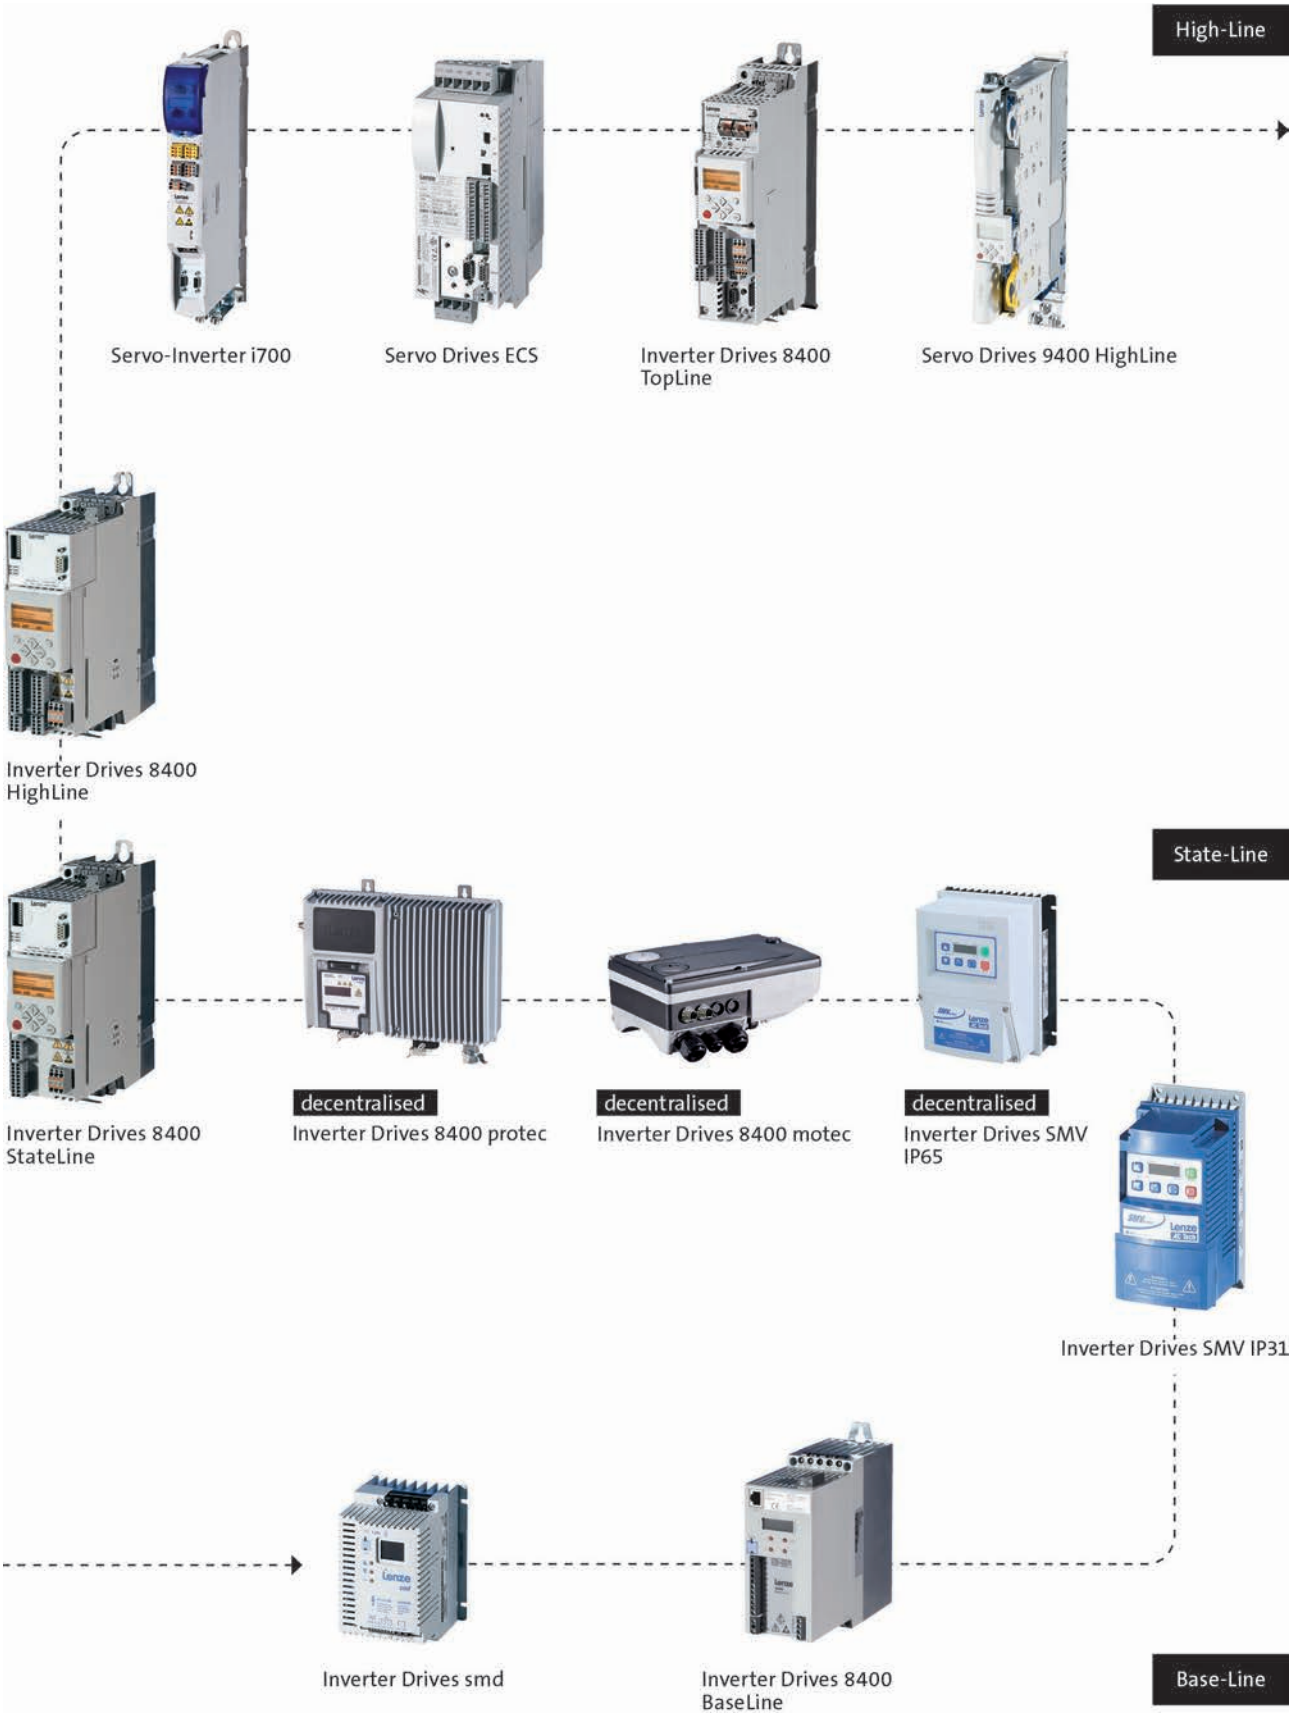

L-force product portfolio

Motors

High-Line



MQA asynchronous servo motors



SDSGS synchronous servo motors



MDXKS synchronous servo motors



Synchronous servo motors MCS



Asynchronous servo motors MCA



Asynchronous servo motors SDSGA

State-Line



MF three-phase AC motors



MH three-phase AC motors



MD three-phase AC motors




Basic MD/MH three-phase AC motors

Base-Line

L-force product portfolio

Gearboxes

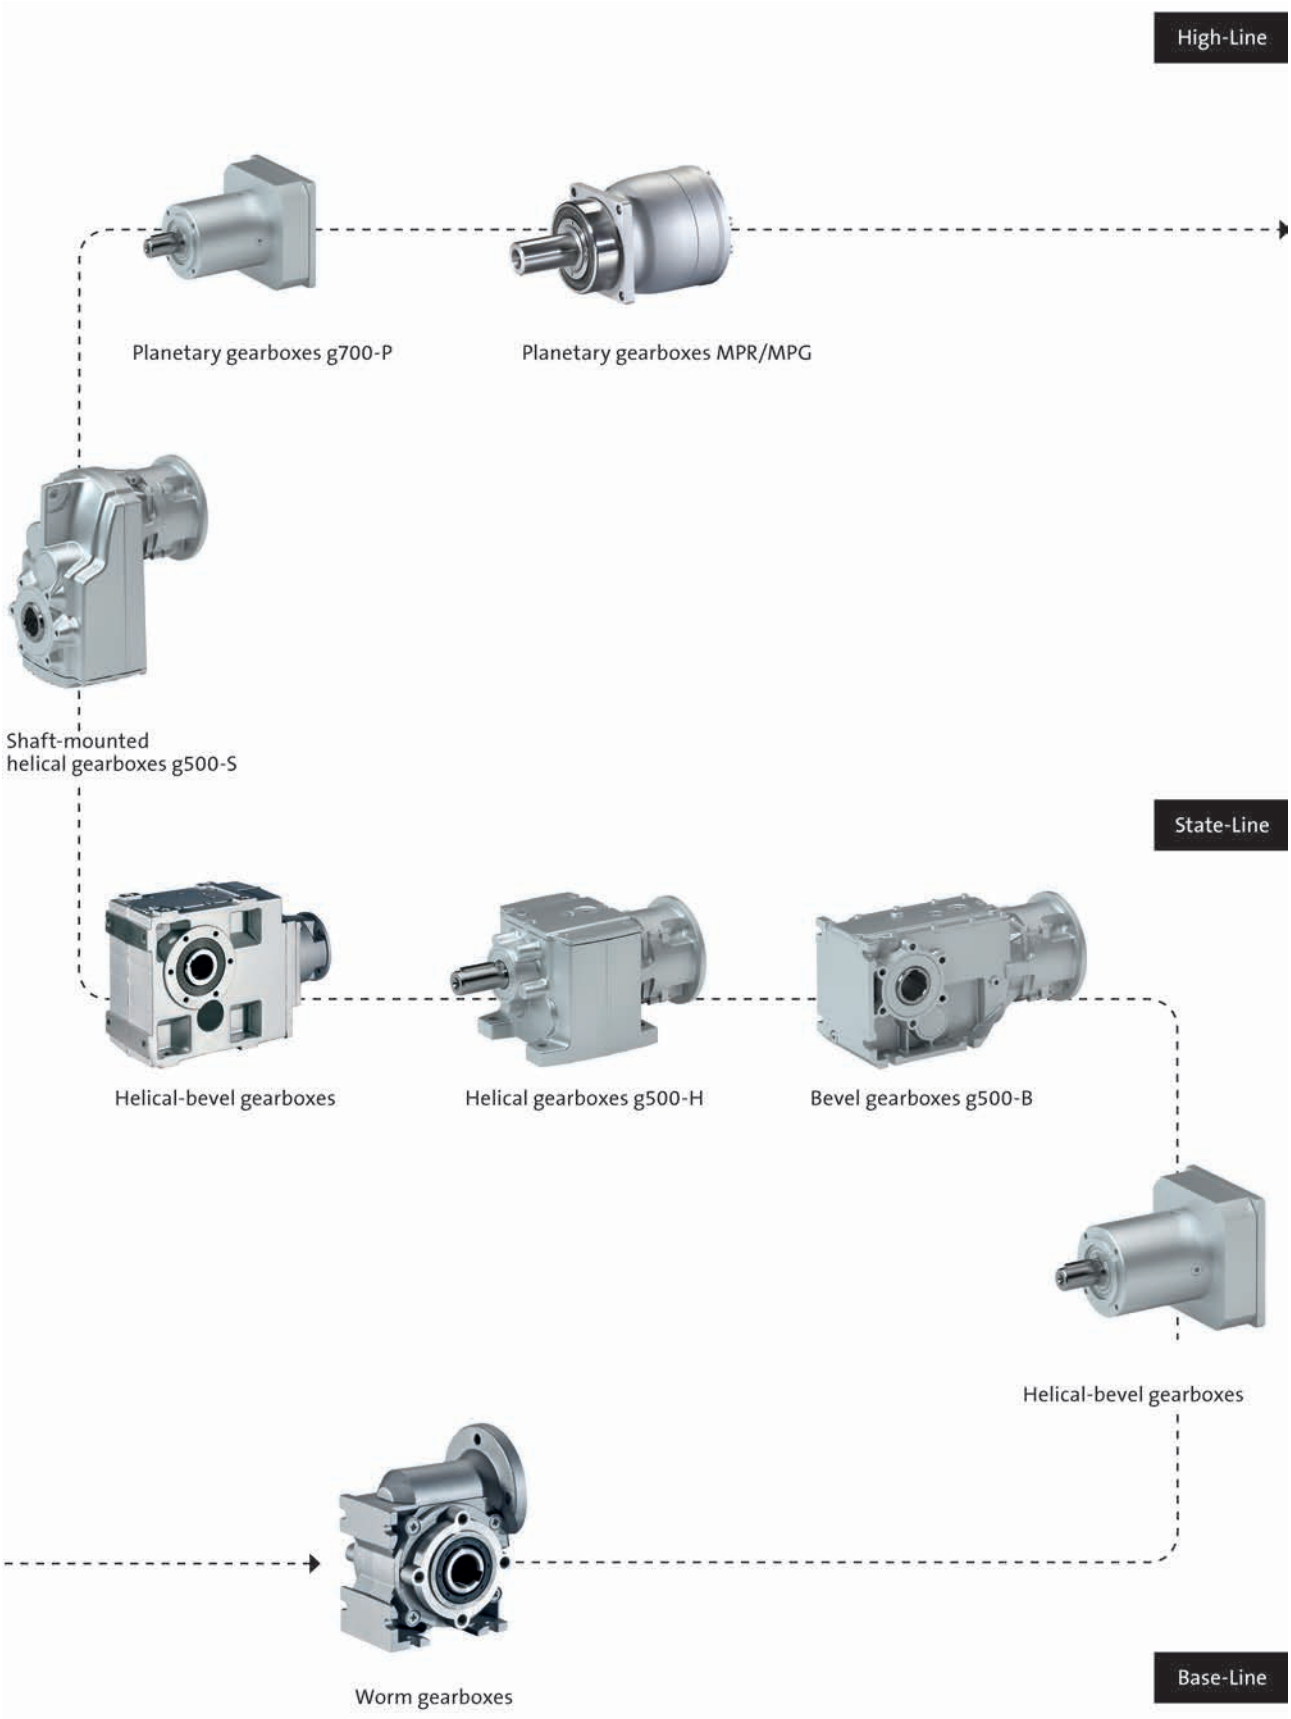

Controller-based Automation



Controller-based Automation



Contents

General information	Automation with central motion control	1.1 - 4
Topologies	General information	1.1 - 6
	Standard topology with EtherCAT®	1.1 - 7
	Advanced topology with CANopen	1.1 - 8
	Advanced topology with PROFIBUS	1.1 - 9
	Extended topology with PROFINET	1.1 - 10
Application Software	The basis	1.1 - 11
	FAST Application Software	1.1 - 12
	FAST Application Template	1.1 - 13
	FAST technology modules	1.1 - 14
	FAST Motion	1.1 - 17
Application areas	Functions and features	1.1 - 18
Engineering	Handling, commissioning and diagnostics	1.1 - 19




Automation with central motion control

Complex machines such as robots, packaging machines and handling systems require a powerfu, uniform and end-to-end automation system with a central control system. This allows coordinated movement of many axes and is also capable of performing control functions for a linear process. For project engineers, the central architecture offers the additional advantage that only one control program has to be developed and managed. We call this Controller-based Automation for central motion control.

To address the increasing complexity of your automation tasks efficiently and cost-effectively, alongside a uniform, end-to-end automation system you also expect your automation supplier to provide you with advanced engineering tools and, if necessary, qualified support. Lenze offers you experienced experts in sales and support that can help you, whatever issues you are experiencing. No matter whether you are seeking support for project planning, dimensioning, selecting the right components or programming a mechatronic solution, we are here to help.


In Europe alone, customers have access to a network of over 100 highly-qualified application engineers with extensive expert knowledge and sector expertise. All-around service, training sessions and a helpline that can be accessed from anywhere in the world round off our portfolio of services.

Components in Lenze's Controller-based Automation system include the controllers, a wide range of inverters with matching standard three-phase AC motors, as well as synchronous servo motors and asynchronous servo motor, each of which can be combined with various types of gearboxes all the way up to decentralised I/O systems.

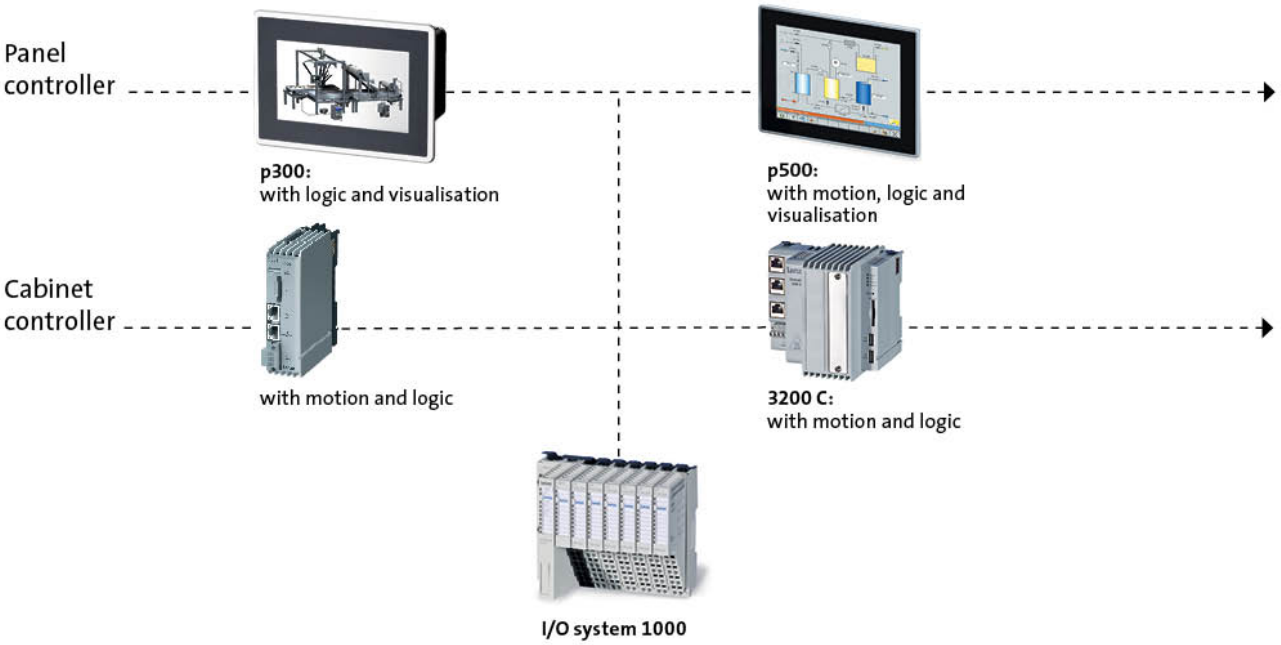



Automation with central motion control

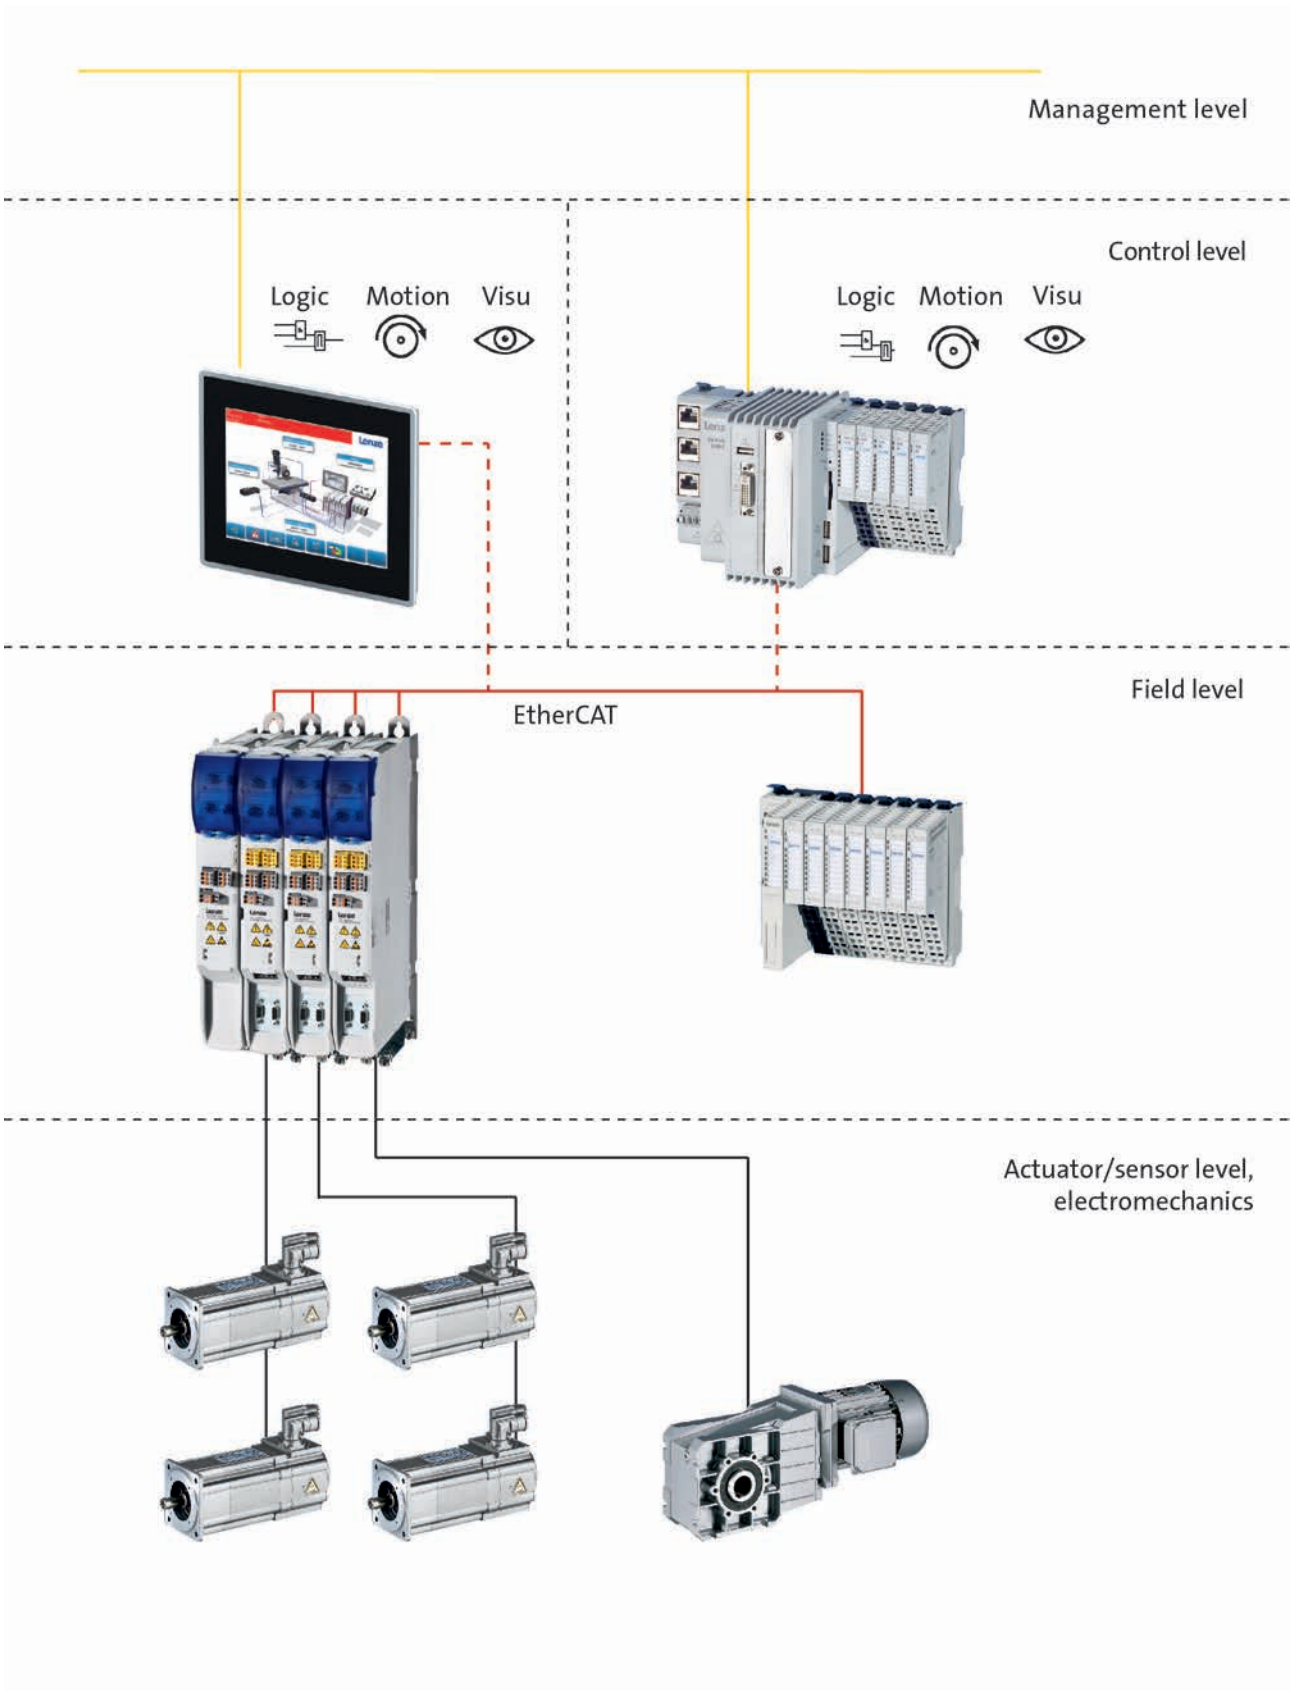



General information

For Controller-based Automation, Lenze offers flexible solutions for system topologies. For self-sustaining solutions, simply rely on the bus systems used by Lenze such as the well-established CANopen or the fast, flexible EtherCAT.

In addition, Lenze offers easy integration into systems with higher-level controls or into existing systems.
The use of the Lenze Engineering tools can be provided for by any type of system bus. Each controller provides an additional Ethernet connection, enabling access of the Engineering tools to the controllers right down to the drives. Programming, commissioning, or diagnostics can therefore be carried out easily also in remote maintenance scenarios.

Controller	c300	p300	3200C	p500
Runtime				
FAST Runtime	●	●	●	●
FAST Motion	In preparation.		●	●
Visualisation		●	● [1]	●
Communication				
EtherCAT	In preparation.	In preparation.	Integrated	Integrated
CANopen	Integrated	Integrated	Option	Option
PROFIBUS Master			Option	
PROFIBUS Slave			Option	Option
PROFINET Device	In preparation.	In preparation.	Option	Option


[1] With monitor panel via DVI interface.



Standard topology with EtherCAT®

The Ethernet-based bus system EtherCAT® is the standard topology for Controller-based Automation applications and offers a large range of potential applications.

Topology with EtherCAT®

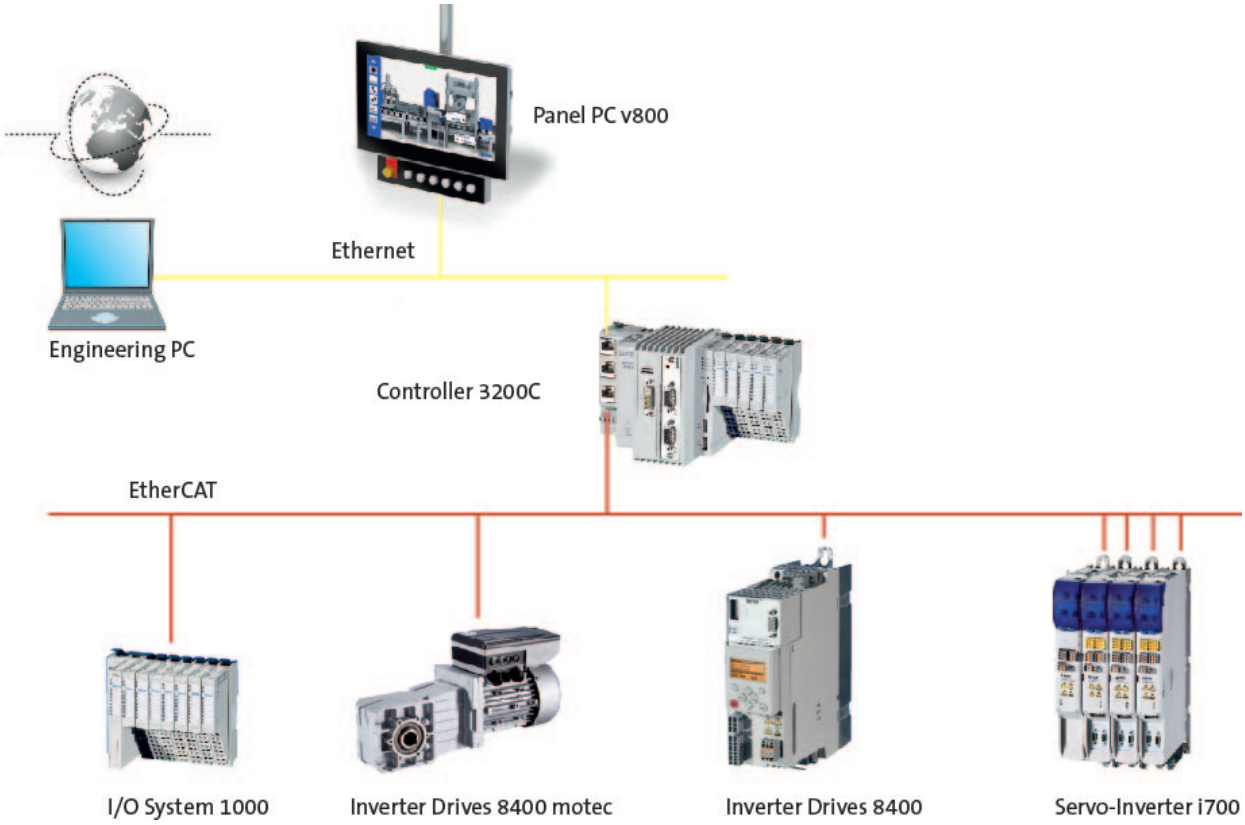




Advanced topology with CANopen

The tried-and-tested CAN bus comes as standard on many field devices. The controllers therefore allow CANopen to be used, some controllers even allow it in addition to the EtherCAT as a double master system. In this topology, a separation of motion and logic bus is recommended.

Topology with EtherCAT® and CANopen

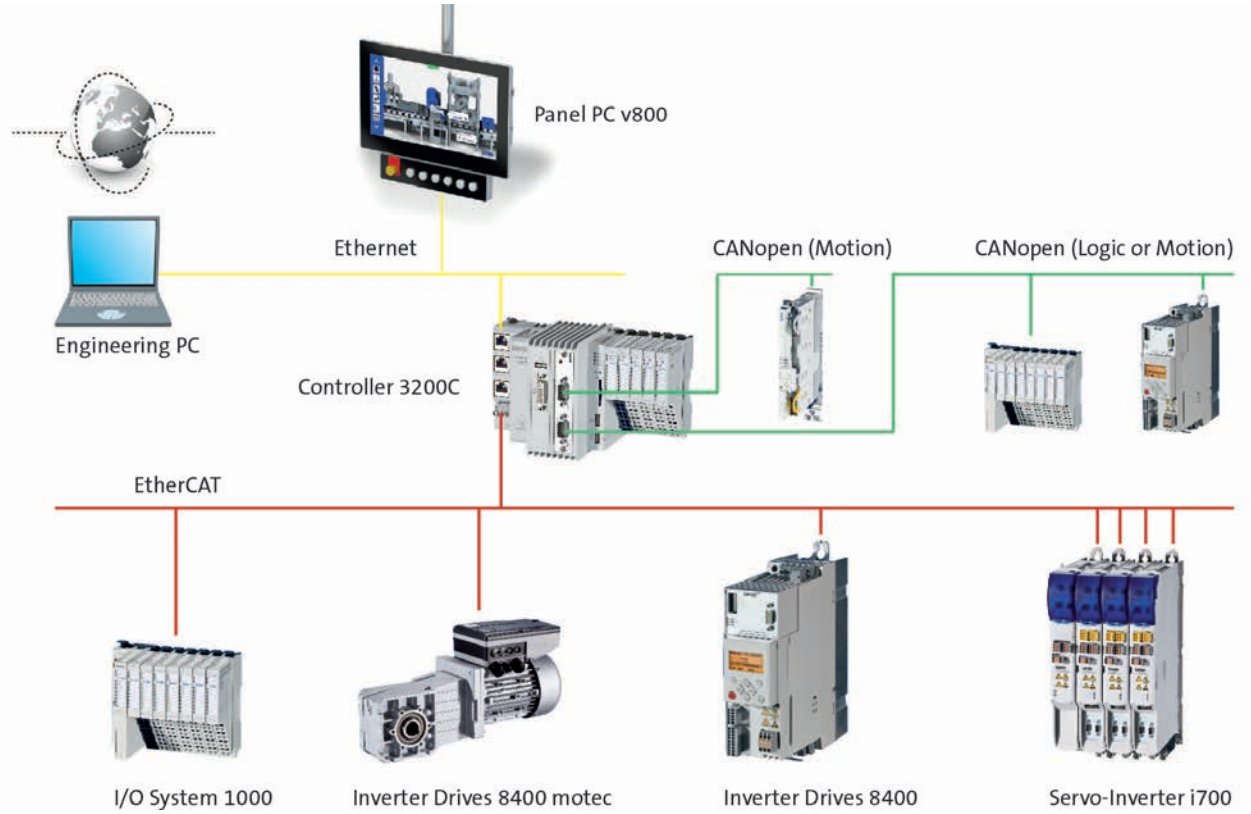




Advanced topology with PROFIBUS

PROFIBUS is the most widely used fieldbus in today's automation technology industry. The choice of available field devices is immense. The expansion of control technology to include PROFIBUS means that this diversity is now also available within FAST Runtime.

Topology with EtherCAT® and PROFIBUS

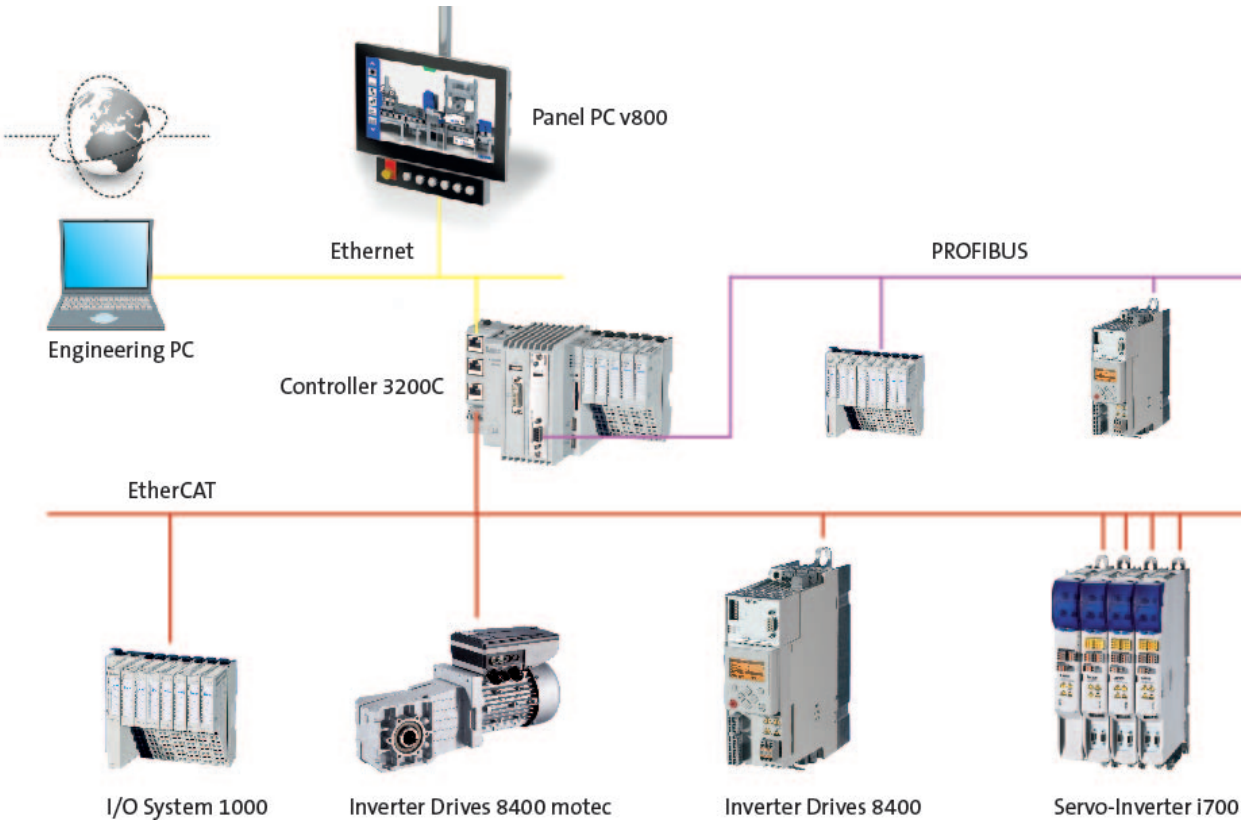




Extended topology with PROFINET

As a direct successor of PROFIBUS, PROFINET is becoming increasingly important. With this new generation, we are now also focusing on TCP/IP and Ethernet Standard in the field of communication. The direct integration of this interface makes it possible to integrate Lenze controllers quickly and easily into PROFINET systems.

Topology with EtherCAT® andPROFINET

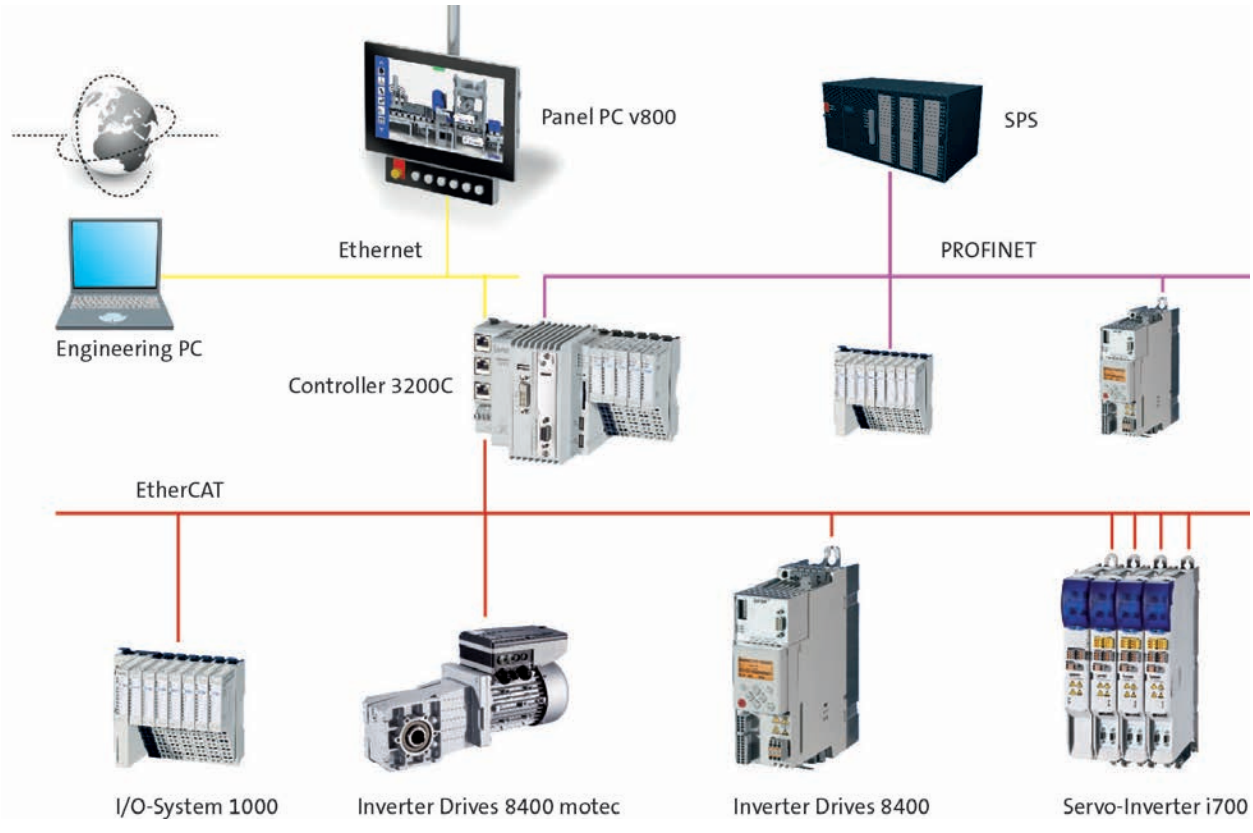



The basis

The runtime software in a Controller determines the type of functions to be executed. The runtime software is available in the "FAST Runtime" and "Visu" versions.

FAST Runtime

The "FAST Runtime" runtime software enables the Controller to execute a sequence control (PLC functionality according to IEC 61131-3).

Moreover, Lenze FAST features licenced, predefined and already tested standard software modules (FAST technology modules) for an easy development of a modular machine control. FAST Motion modules (based on "PLCopen motion control) can be used to individually extend the functionalities of the FAST technology modules. – With Lenze FAST you only pay the functionalities you really need!

The PLC programming is carried out with the »PLC Designer« engineering tool. The FAST technology modules and FAST Motion modules are contained in »PLC Designer« function libraries and can be easily integrated into the machine program.

Visualisation

The "Visu" runtime software enables the Controller to execute visualisation projects. It can be used separately in addition to the "FAST Runtime" runtime software.


The "Visu" runtime software can only be executed on Panel Controller/HMI p300 and p500 or Cabinet Controller 3231C and 3241C with DVI interface for an external monitor panel.

Lenze's »VisiWinNET®« is a scalable engineering tool to create visualisation applications according to the individual requirements and load these onto the Controllers. The scaling is done via the number of "Power Tags".

»VisiWinNET®« is available in the »VisiWinNET®« Smart and »VisiWinNET®« Professional versions.

»VisiWinNET®« offers these visualisation functions:

- Control variables
- Status message system
- Archiving
- User management
- Recipe system

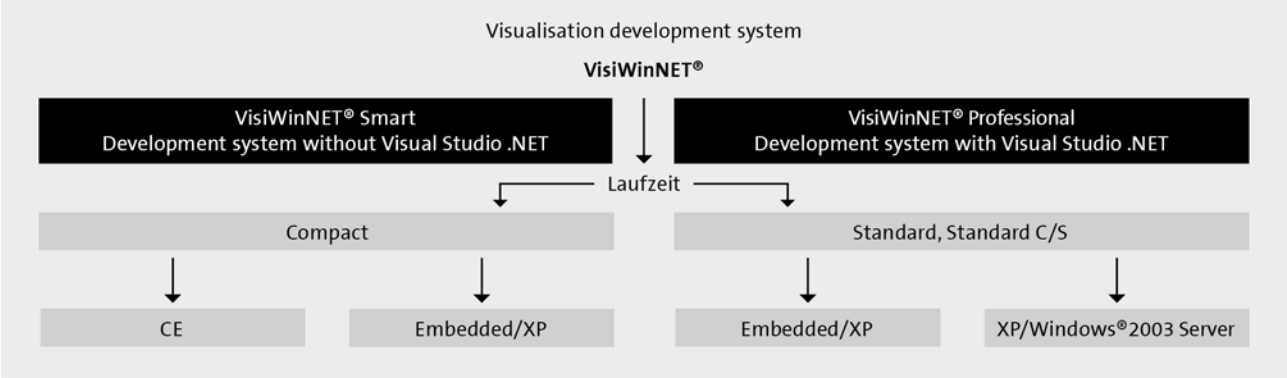

VisiWinNET® engineering tool in all designs



FAST Application Software


The topic of software is becoming increasingly important in developing machines as mechanical engineers are focusing more attention on efficient processes for creating the applications they need.

Lenze FAST (Feasibly Applicable Software Toolbox) provides Lenze standard software modules for easily developing a modular machine control.

For this purpose, the »PLC Designer« engineering tool with the "FAST Application Template" provides for an easy programming and commissioning as standardised software structure and with predefined technology modules. FAST Motion functions serve to implement individual extensions.

Highlights

- Up to 80 % of the software engineering can be covered by standards.
- Considerable reduction of the development times for the basic functions
- Saved time can be invested in the further development of the special features of the machine.
- Predefined and tested software modules
- Structured programming
- Easier reuse and extension of programming segments
- Error reduction by tested software

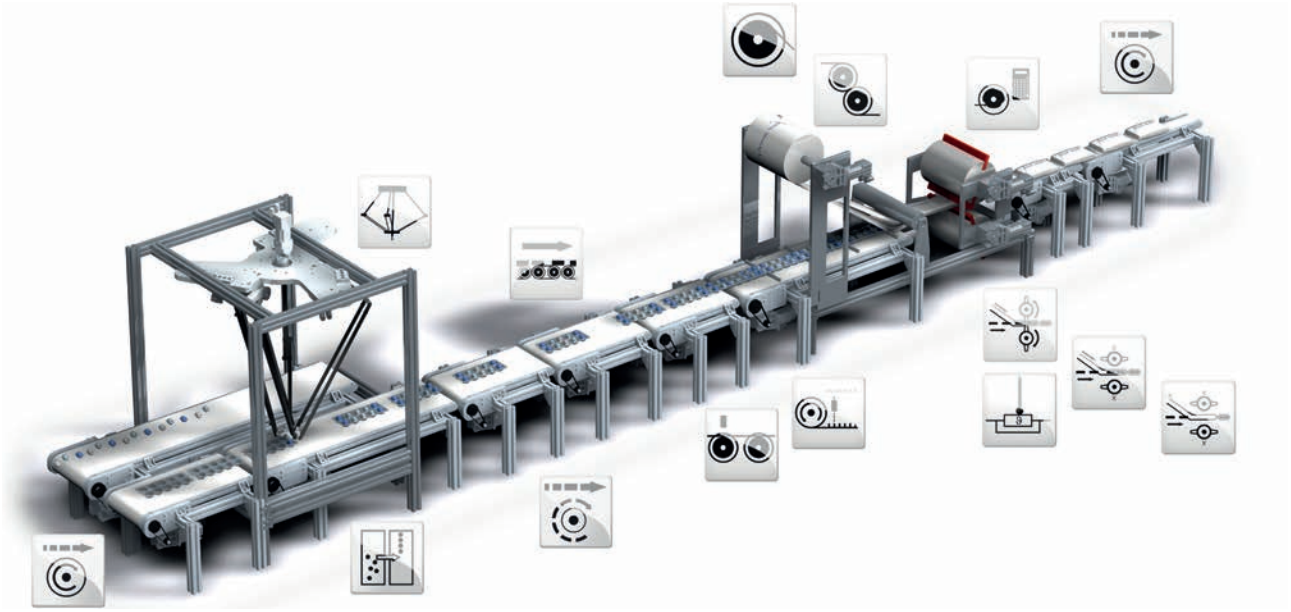



FAST Application Template

The FAST Application Template is standardised by Lenze for a modularised and clear programming in the »PLC Designer«.

For a modular implementation of the mechatronic structure of an automation system, ready-made and reusable machine modules and module applications (e.g. a cross cutter) can be generated in the FAST Application Template.


The FAST Application Template can be used via a library in the »PLC Designer« (from version 3.3). The library contains the structure and basic functionality of the FAST Application Template (as, for instance, state machine and error handling).

FAST Application Template elements

In order to map the automation system based on the FAST Application Template in the »PLC Designer«, the structure of the entire machine application has to be divided into machine modules. Each subfunction or drive function of the machine (e.g. "cross cutter" or "conveying belt") is mapped in one machine module.

A machine module always comes with at least one module application. Up to three module applications per machine module are possible.

The FAST Application Template supports two up to five hierarchy levels with up to 30 machine modules.

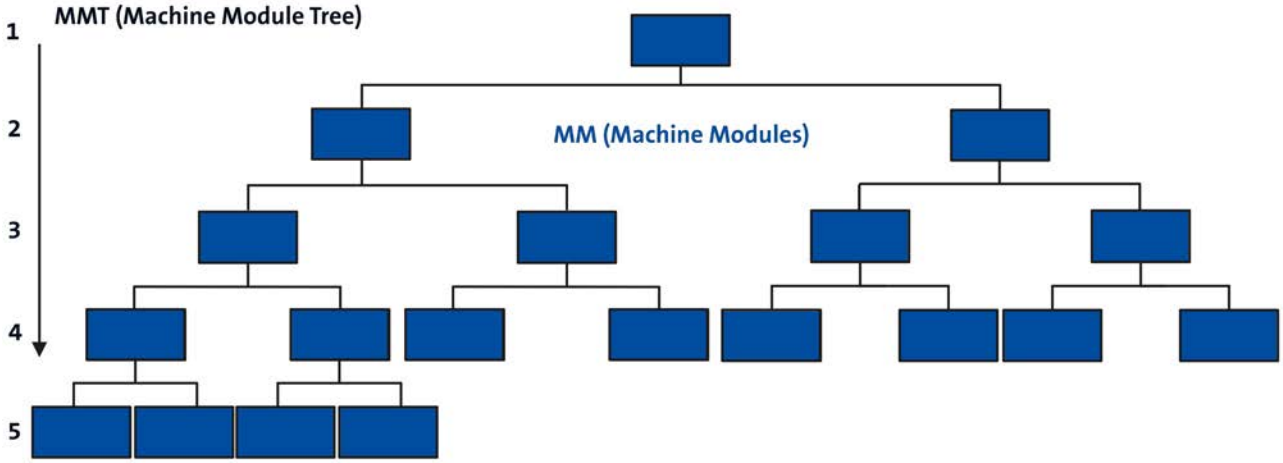

Example of a machine structure tree (MMT) with five levels

PackML standard

The FAST Application Template PackML standard is an extension that fulfils the requirements of the OMAC (Organization for Machine Automation and Control) user organisation for open and modular automation solutions for packaging machines according to the "PackML" standard.




FAST technology modules

The predefined FAST technology modules serve to easily implement the desired machine functions.

The FAST technology modules are standardised software modules for a modular programming of the machine control. A FAST technology module features a complete and pre-tested drive function.

Integrated basic functions and an integrated visualisation provide for an easy commissioning and testing of the modules. The reusability of the modules increases the quality of the software and considerably reduces the time required for programming, commissioning and testing.

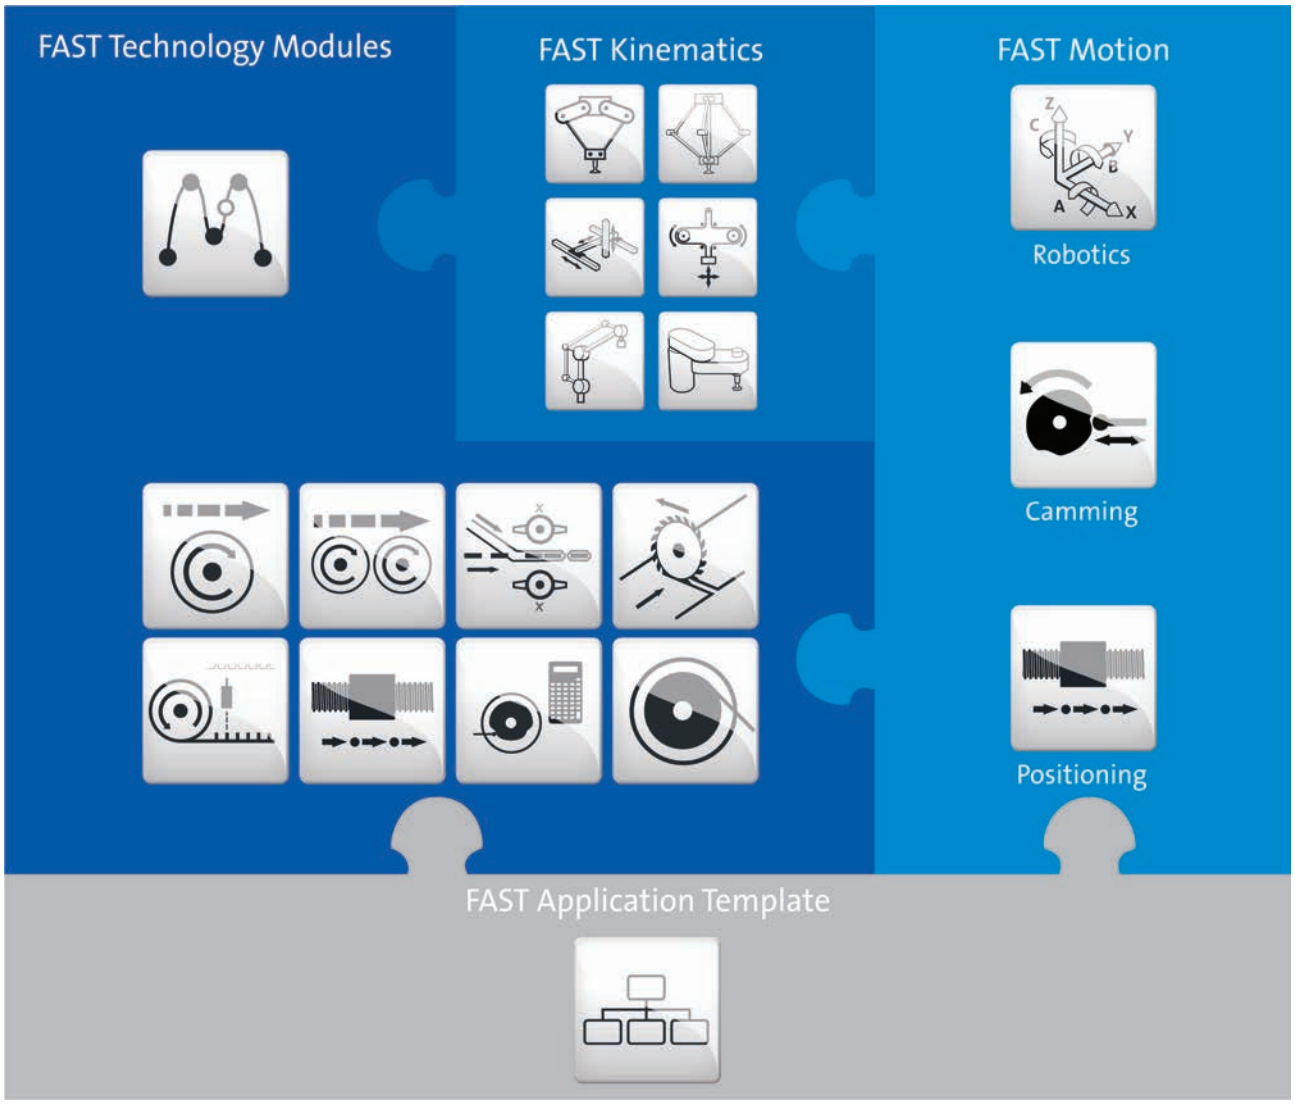

The FAST technology modules are contained in the »PLC Designer« as independent function blocks in a library. They use the standardised interfaces and can thus be easily integrated into the machine program, combined in any way and extended individually with FAST Motion functions.

Using the FAST technology modules requires a licencing via Application Credit, see controller accessories.



FAST technology modules

Each FAST technology module contains the basic functions manual jog, homing and positioning for the drive.

These technology modules are available:

Technology module		Function
Virtual Master		Implementation of a virtual master axis in the machine
Electrical Shaft		Synchronisation and coupling of drives with precise speed and positioning.
Flex Cam		Implementation of one or several electric cams. Flexible management of curves created online and offline.
Cross Cutter		Synchronised movements of drives for cross-sealing and/or cross-cutting of products.
Register control		Implementation of a clock-synchronised drive for generating a register control with print mark detection.
Winder Dancer		Implementation of a winding drive with dancer position control and/or a winding drive with tensile force/speed control
Table Positioning		Positioning profiles for single axes with smoothing and touch probe positioning
Flying Saw		Cutting and processing of material while moving



FAST technology modules

Technology module		Function	Kinematics		Function
Pick&Place		Implementation of complex three-dimensional movements by means of profiles for up to four drives with different kinematics.	Portal		Universal Cartesian portal kinematics with 2, 3 and 4 degrees of freedom for Pick&Place with high load capacities and big workspaces
			Belt portal		Universally usable belt kinematics with 2 degrees of freedom *
			Delta 2		Parallel kinematics with 2 degrees of freedom * for highly dynamic Pick&Place tasks
			Delta 3		Parallel kinematics with 3 degrees of freedom * for highly dynamic Pick&Place tasks
			Scara		Universal serial Scara kinematics with 2 and 3 degrees of freedom
			Articulated P		Special form of an articulated arm kinematics with 4 degrees of freedom especially suitable for palletizing


* Further degrees of freedom in preparation.



FAST Motion

FAST Motion provides full flexibility and scalability for programming and comprises optimised function blocks based on "PLCopen motion control":

- "Motion Control" modules (based on PLCopen Motion Control (formerly part 1+2) are optimised for the basic functions "positioning" and "cams" (synchronising).
- "Coordinated Motion" modules (based on PLCopen Coordinated Motion (part 4) are optimised for multi-axis coordinated three-dimensional movements – which can also be controlled via the FAST technology module "Pick & Place".

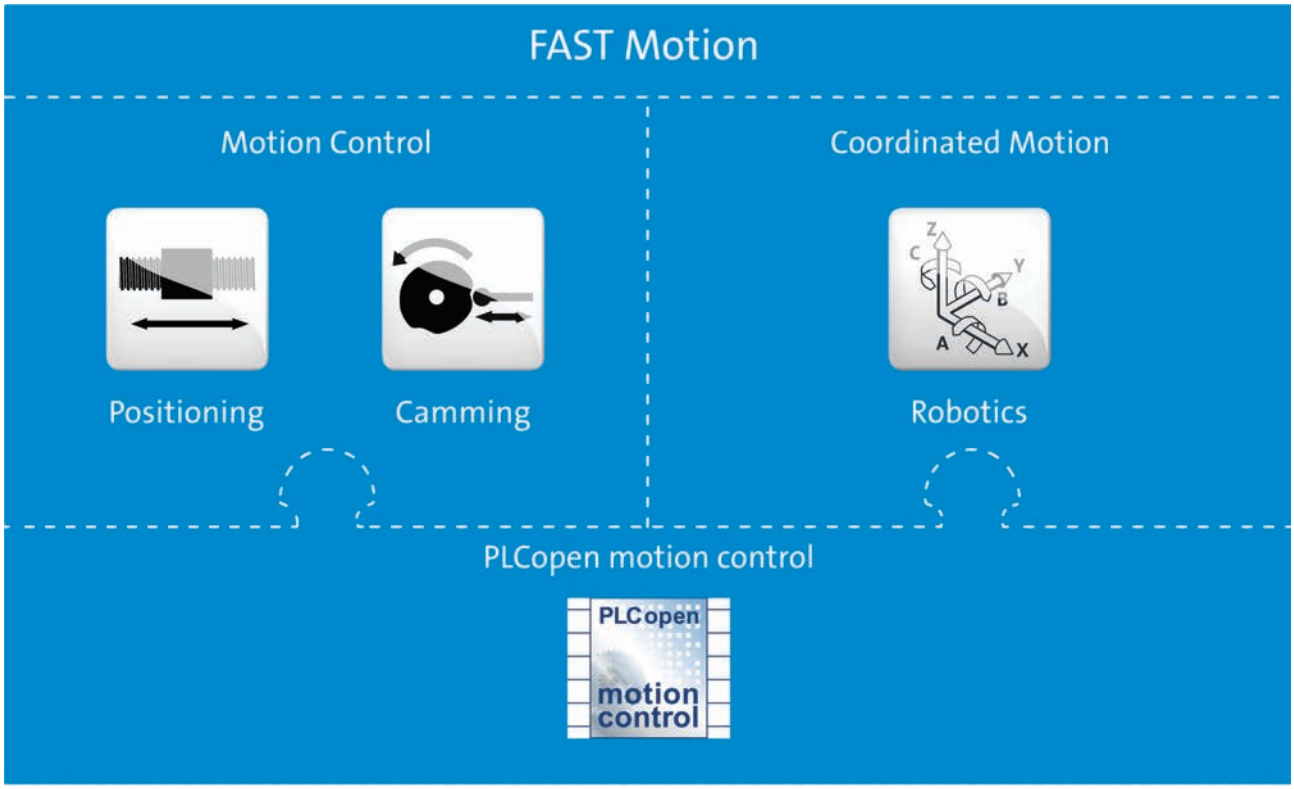

If the functionalities of the FAST technology modules are not sufficient, they can be supplemented individually with FAST Motion modules. This serves to easily create the machine function with preplanned standards. Thus, FAST frees up time for what really matters.

The »PLC Designer« contains the "Motion Control" module in two libraries and the "Coordinate Motion" modules in one library.




Functions and features


Servo-Inverter i700

The Servo-Inverter i700 is implemented into the Controller-based Automation solution via the Ethernet-based EtherCAT® bus system. Thus, a large variety of technology applications can be adopted via the implemented controller.
The »PLC Designer« engineering tool serves to program the FAST Motion functions.

Controller 3200 C with Servo-Inverter i700

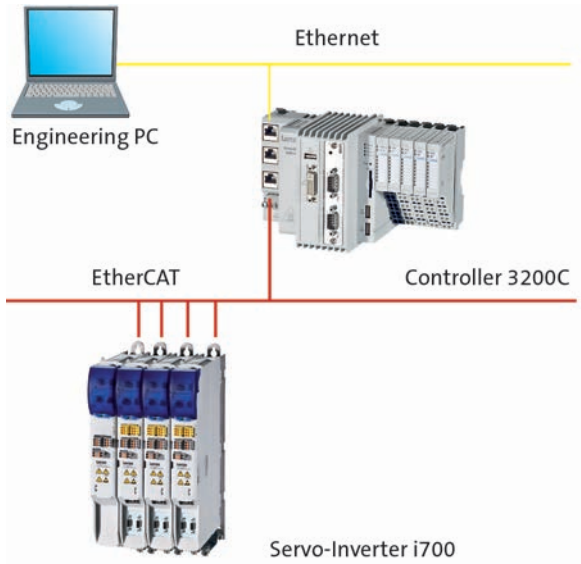

Controller p500 with Servo-Inverter i700

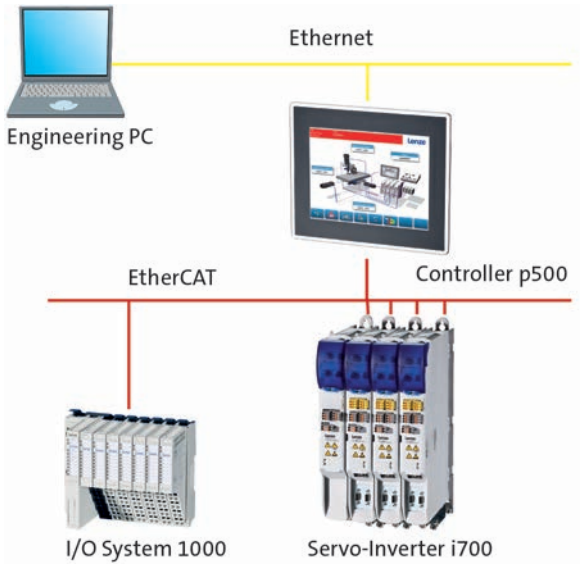

For the different controllers, cycle times of the setpoint selection depend on the number of axes and the functionalities. The following table shows typical values for "Motion Control" (based on PLCopen Motion Control, formerly Part 1+2) and "Coordinated Motion" (based on PLCopen Coordinated Motion, Part 4).

Mode						
Controller			3221 C	3231 C	3241 C	p500
Min. cycle time PLCopen part 1,2: Motion Control						
2 axes	t	[ms]	1			
4 axes	t	[ms]	1			
8 axes	t	[ms]	1			
12 axes	t	[ms]	2	1		
16 axes	t	[ms]	2			
32 axes	t	[ms]	3			
64 axes	t	[ms]	6	5		
Min. cycle time PLCopen part 4: Coordinated Motion						
2 axes	t	[ms]	2	1		
4 axes	t	[ms]	2	1		
8 axes	t	[ms]	3	2		



Handling, commissioning and diagnostics

The Controller-based Automation solution can be easily commissioned and optimised with the PLC Designer and »EASY Starter« engineering tools.
The entire plant is commissioned via the Ethernet terminal of the Controller. By this means, the entire plant will be made available.
When the plant is used for the first time, it can be subsequently optimised using the »EASY Starter«.

Drafting concepts




Finding the right solution together
- Individual consulting service by the Lenze field service.
- Joint analysis and definition of the machine topology.
- Basic functions of the FAST modules as basis.
- Consistent automation and drive solution.

Implementing solutions




Consistent engineering using the »PLC Designer«
- Control and drive application with only one tool.
- Creating an application easily using the FAST modules.
- All Lenze motor data is available.
- The oscilloscope function within the inverter supports the assessment and optimisation of the settings.

Manufacturing machines

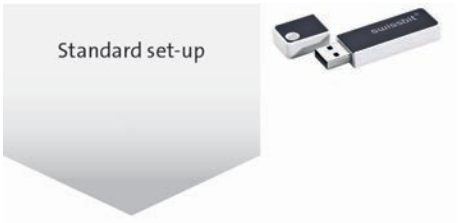

Commissioning via USB stick
- The prepared USB stick provides for the
  - transfer of the control software.
  - parameter setting and firmware download for connected field devices.
- The complete machine can be prepared, configured and parameterised in an automated fashion.
- Plug in USB stick, start machine, wait, finished.

Ensuring productivity

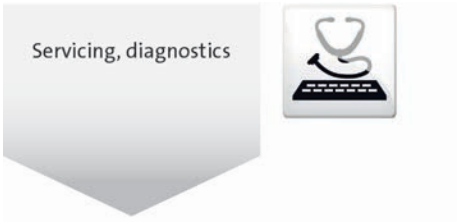

Easy diagnostics - »EASY Starter«
- Support by the service technicians in commissioning and maintenance.
- Easy parameter setting and commissioning.
- Online diagnostics without the risk of an accidental application change.

Device exchange without tools
- Thanks to automated firmware and parameter download.
- The SD card of the Controller provides for an easier device exchange.
- Possible without any specific know how and software.
- No data of the machine gets lost.



Controller 3200 C



Controller 3200 C

Contents



General information	Product key	3.1 - 4
	Equipment	3.1 - 5
	Product information	3.1 - 6
	Lenze FAST	3.1 - 8
Technical data	Standards and operating conditions	3.1 - 10
	Rated data	3.1 - 11
	Dimensions	3.1 - 12
Interfaces	Connection plan	3.1 - 13
	Mains connection	3.1 - 13
Accessories	Application Credit	3.1 - 14
	SD card and USB flash drive	3.1 - 17
	24 V power supply unit	3.1 - 17
	CAN bus connector	3.1 - 18
	External energy storages	3.1 - 18



Product key

Product | **Product key**

Product	E32GAC		XXX-0		S133		000
3221 C		00000B4F		2			
3231 C		10000C4G		2			
3241 C		10000C4H		1			

Option interface MC 1

0 – No
5 – MC-PBM (PROFIBUS Master)
6 – MC-PBS (PROFIBUS Slave)
8 – MC-PND (PROFINET Device)
9 – MC-CAN2 (CANopen)

Runtime Software visualisation (3231 C and 3241 C only)

00 – Visu: without runtime
14 – Visu: VisiWinNET® Compact CE, 500 power tags



Controller 3221 C




Controller 3231 C



Controller 3241 C



Equipment

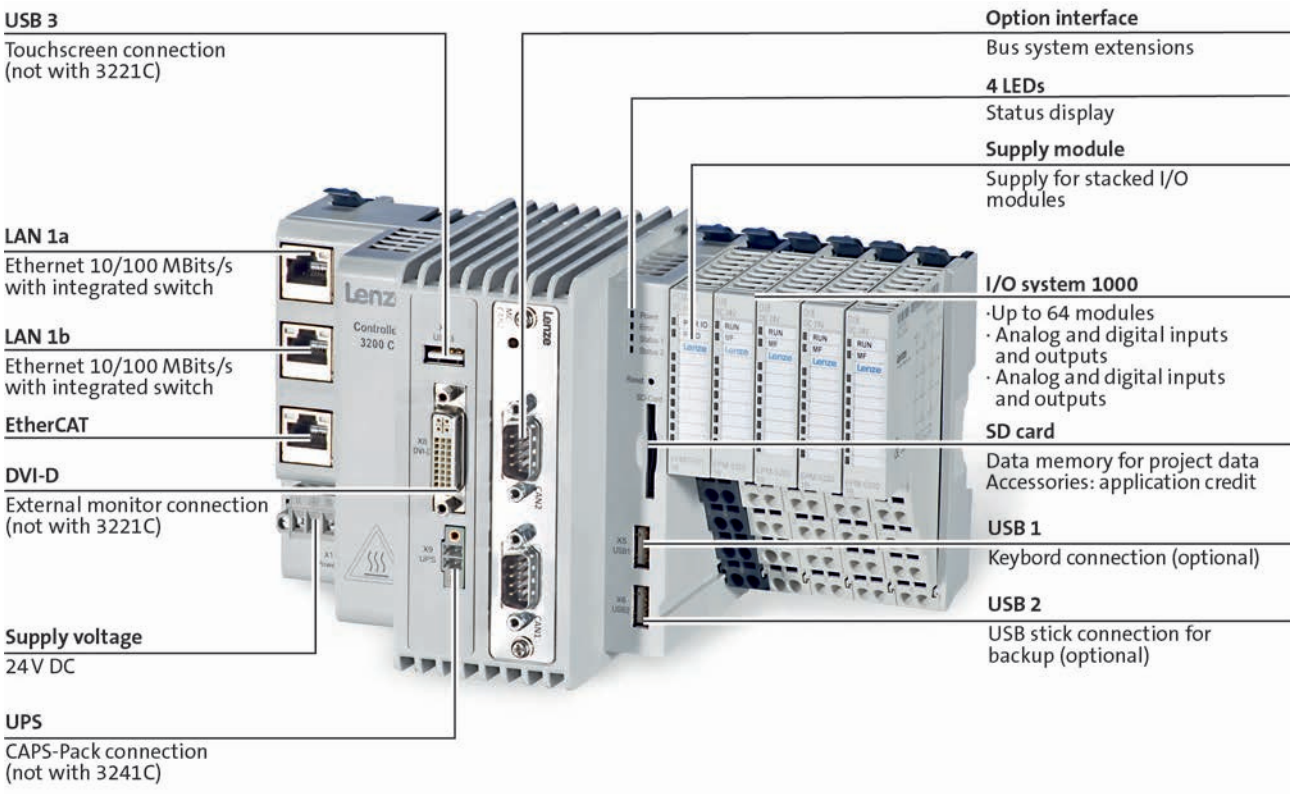
USB 3
Touchscreen connection
(not with 3221C)
LAN 1a
Ethernet 10/100 MBits/s
with integrated switch
LAN 1b
Ethernet 10/100 MBits/s
with integrated switch
EtherCAT
DVI-D
External monitor connection
(not with 3221C)
Supply voltage
24 V DC
UPS
CAPS-Pack connection
(not with 3241C)
Option interface
Bus system extensions
4 LEDs
Status display
Supply module
Supply for stacked I/O
modules
I/O system 1000
·Up to 64 modules
· Analog and digital inputs
and outputs
· Analog and digital inputs
and outputs
SD card
Data memory for project data
Accessories: application credit
USB 1
Keybord connection (optional)
USB 2
USB stick connection for
backup (optional)



Product information

The Controller 3200 C is the ideal platform for automation systems in the control cabinet. It is based on the Intel® processor Atom™, which makes it possible to implement a powerful computer architecture without force-cooling and other moving components even in the smallest of spaces. As a special touch it is possible to directly attach the I/O system 1000 without taking the detour via fieldbuses.



Variants
The Controller 3200 C comprises three versions. Together with our system modules, the variants 3221 C, 3231 C and 3241 C provide the basis for a powerful Motion controller – with and without an integrated visualisation! The controller version 3231 C is provided with an integrated DVI interface to which external monitors or monitor panels can be connected.
If there is an extremely great demand for data to be saved persistently in the event of a power failure, the implemented UPS functionality might reach its limits. Then the 3241 C offers you the possibility of significantly increasing this amount of data by connecting an external energy storage mechanism (CAPS-PACK).

Integrated Ethernet switch
The integrated switch allows line topologies to be established using Ethernet without the need for a separate switch as an infrastructure component. In addition to this, a free interface provides allows a diagnostics device such as a service technician's laptop to be connected without having to access the bus physics.


I/O System 1000 as local I/Os
The extremely fast communication (48 Mbps) between the L-force Controller 3200 C and the I/O modules takes place via a proprietary, yet extremely efficient backplane bus. This allows individual and group access to the inputs and outputs and also enables precise synchronisation of the input modules, which attach a time stamp to the input signals with a resolution of 1µs and thereby ensure high-precision.




Product information




Logic (PLC), motion and visualisation in a single device
- Optimised for machine(modules) with central motion control
- Easy engineering thanks to central data storage



High-precision control for optimum manufacturing results
- Touch probe-compatible inputs
- High-precision output control
- Highly deterministic backplane bus with precise 1 µs time stamp



Easy to use
- Easy use of FAST via pluggable SD card with Application Credit for Motion Control or Coordinated Motion
- Automated standard set-up and data backup via USB stick
- Easy device replacement by means of the pluggable SD card with the corresponding Application Credit
- Diagnostics by implemented web server or EASY Starter



Prepared for the future thanks to compliance with industrial standards
- Programming in IEC61131-3
- Motion Control as per PLCopen
- PLC Designer based on CODESYS3



Communicative
- EtherCAT® as a fast bus system directly on board (in preparation)
- CANopen on board
- Precisely tailored by modular extension option



I/O system 1000 as local I/Os
- Permanent wiring due to separation of electronics and base module
- Fast diagnostics achieved thanks to clear labelling of the LEDs assigned to each channel
- Easy connection thanks to inclusion of printed circuit diagram
- Fully integrated shield connection without special shield terminals




Lenze FAST

Lenze FAST (Feasibly Applicable Software Toolbox) provides Lenze standard software modules for easily developing a modular machine control.

For this purpose, the »PLC Designer« engineering tool with the "FAST Application Template" provides for an easy programming and commissioning as standardised software structure and with predefined technology modules.

FAST Motion functions serve to implement individual extensions. The »EASY Starter« can be used to subsequently optimise and diagnose the system.

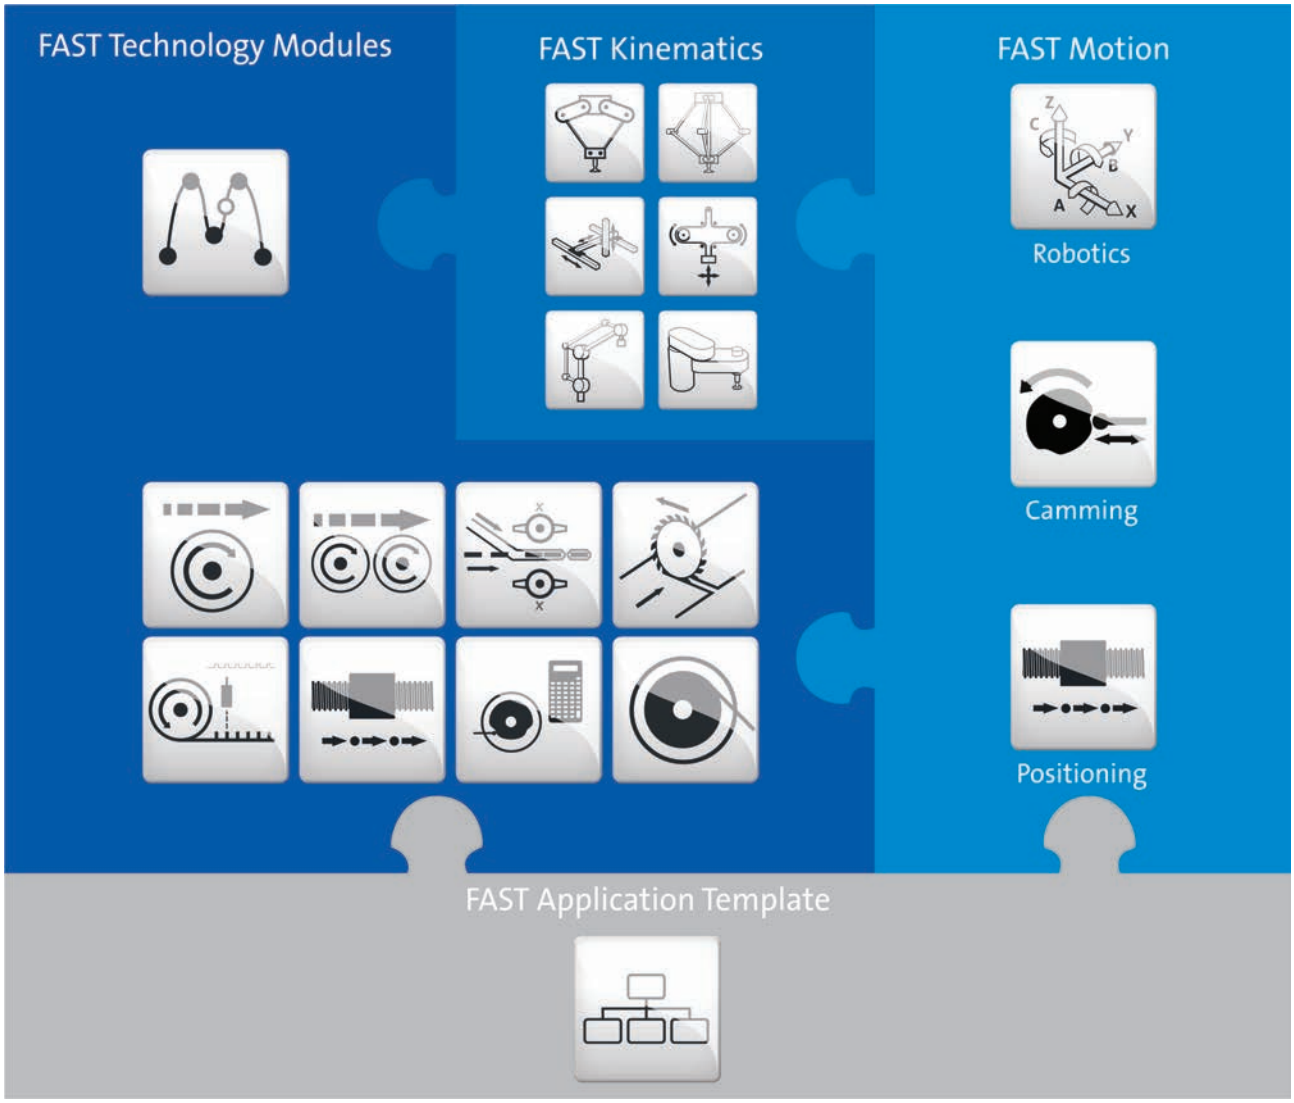

FAST Application Template

The FAST Application Template is standardised by Lenze for a modularised and clear programming in the »PLC Designer«.

The FAST Application Template can be used via a library in the »PLC Designer«. The library contains the structure and basic functionality of the FAST Application Template (as, for instance, state machine and error handling).



Lenze FAST

FAST technology modules

The predefined FAST technology modules serve to easily implement the desired machine functions.

The FAST technology modules are standardised software modules for a modular programming of the machine control. A FAST technology module features a complete and pre-tested drive function. Integrated basic functions and an integrated visualisation provide for an easy commissioning and testing of the modules. The reusability of the modules increases the quality of the software and considerably reduces the time required for programming, commissioning and testing.

The FAST technology modules are contained in the »PLC Designer« as independent function blocks in a library. They use the standardised interfaces and can thus be easily integrated into the machine program, combined in any way and extended individually with FAST Motion functions.

FAST Motion

FAST Motion provides full flexibility and scalability for programming and comprises optimised function blocks based on "PLCopen motion control":

- "Motion Control” modules (based on PLCopen Motion Control (formerly part 1+2) are optimised for the basic functions "positioning" and "cams" (synchronising).
- "Coordinated Motion" modules (based on PLCopen Coordinated Motion (part 4) are optimised for multi-axis coordinated three-dimensional movements – which can also be controlled via the FAST technology module "Pick & Place".

If the functionalities of the FAST technology modules are not sufficient, they can be adapted and extended individually using the FAST Motion modules. These modules are capable to program any number of functions.

The »PLC Designer« contains the "Motion Control" modules in two libraries and the "Coordinated Motion" modules in one library.



Standards and operating conditions

Mode					
Controller			3221 C	3231 C	3241 C
Conformity					
CE			Low-Voltage Directive		
			2014/30/EU		
EAC			TP TC 020/2011 (TR CU 020/2011)		
Approval					
UL 508C			Process Control Equipment (File-No. E236341)		
UL/CSA			CSA 22.2 No.142		
Degree of protection					
EN 60529			IP20		
NEMA 250			Type 1		
Climatic conditions					
Storage (EN 60721-3-1)			1K3 (Temperature: -5 °C ... +45 °C)		
Transport (EN 60721-3-2)			2K3 (temperature: -25 °C ... +70 °C)		
Operation (EN 60721-3-3)			3K3 (temperature: 0 °C ... +55 °C) [1] 3K3 (temperature: 0 °C ... +50 °C) [2]	3K3 (temperature: 0 °C ... +50 °C) [1] 3K3 (temperature: 0 °C ... +45 °C) [2]	
Degree of pollution					
EN 61131-2			2		
Site altitude					
Amsl	H_{max}	[m]	3000		
Vibration resistance					
Vibration (EN 61131-2)			1 g		
Mechanical shock (EN 61131-2)			15 g		
Operation (Germanischer Lloyd)			5 Hz ≤ f ≤ 13.2 Hz: ± 1 mm amplitude 13.2 Hz ≤ f ≤ 100 Hz: 0.7 g		
Noise emission					
EN 61000-6-4			Industrial premises		
Noise immunity					
EN 61000-4-2			ESD: Severity 3		
EN 61000-4-6			150 kHz ... 80 MHz, 10 V/m 80 % AM (1 kHz)		
EN 61000-4-3			80 kHz ... 1000 MHz, 10 V/m 80 % AM (1 kHz) 1.4 GHz ... 2.0 GHz, 3 V/m, 80 % AM (1kHz) 2.0 GHz ... 2.7 GHz, 1 V/m, 80 % AM (1kHz)		
EN 61000-4-4			Burst: Severity 3		

[1] Horizontal mounting
[2] Vertical mounting




Rated data

					
Mode					
Controller			3221 C	3231 C	3241 C
Processor type					
Fanless			Intel® Atom™ 1.1 GHz	Intel® Atom™ 1.6 GHz	
Storage medium					
SD card [1]		[MB]	512		
Interfaces					
Ethernet (integrated switch)			2		
EtherCAT Master			1		
USB			2	3	
DVI-D				1	
ACU (external energy storage)					1
Option			Interface connection for CANopen (MC-CAN2) Interface connection for PROFIBUS Master (MC-PBM) Interface connection for PROFIBUS Slave (MC-PBS) Interface connection for PROFINET-Device (MC-PND) Interface connection for EtherCAT (MC-ETH)		
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Max. current consumption					
With connected I/Os	I_{max}	[A]	1.00	1.20	
Without connected I/Os	I_{max}	[A]	0.60	0.80	
Operating system					
			Windows® CE 6.0		
Memory size					
Program memory		[MB]	512		
Data memory		[MB]	512		
Flags		[kB]	4		
Retain data		[kB]	60		1024 [2]
Max. number of persistently saved visualisation alarms			0		10000 [2]
Main memory (RAM)		[GB]	1		
Min. internal flash memory		[GB]	1	2	4
Runtime					
FAST Runtime			●		
Visualisation [3]			●		
Dimensions					
	h x b x t	[mm]	112 x 136 x 105		
Mass					
	m	[kg]	0.70		

[1] 1 x SD card included in the scope of supply.
[2] CAPS-Pack accessory reqired.
[3] Controllers 3231 C and 3241 C with external monitor at the DVI-D interface.
For operation, power tags are required.




Dimensions

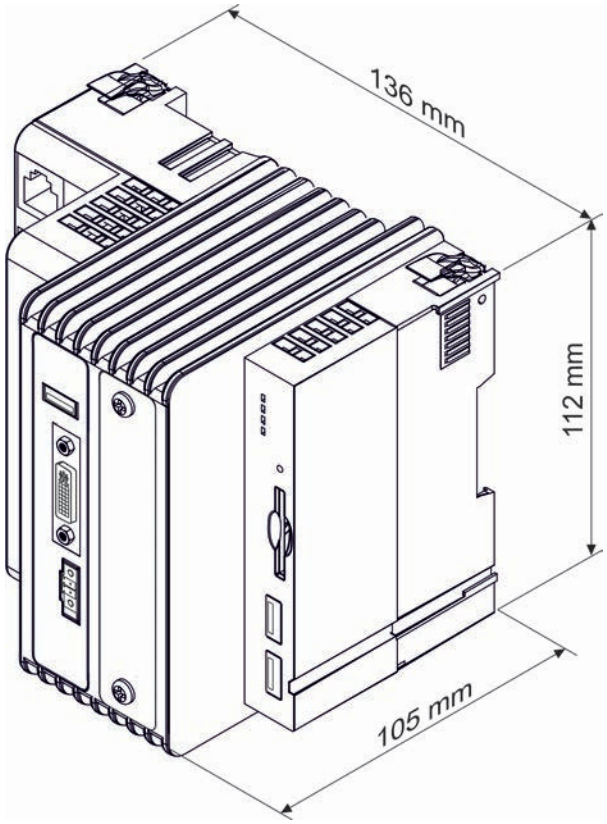



Connection plan

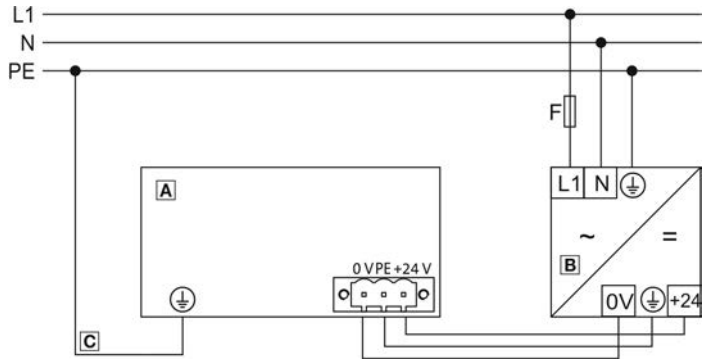

Position	Meaning
A	Controller
B	Power supply unit
C	Protective earth connection on the supply side via DIN rail

Mains connection

	Connection	Connection type	Cable type
	DC supply (24 V)	3-pole Combicon socket	Cable with Combicon-plug (cable cross-section max. 2.5 mm²)



Application Credit

With Lenze FAST, technology modules are provided for Motion Control and Coordinated Motion. In order that these modules are used, the following Application Credit is required.
If different technology modules are used, the demand for Application Credit must be added for all modules used.

Mode		Features	Product key
Application Credit		• Licence for use of FAST Application Software, 100 points	EPCZEMSD0L1010
		• Licence for use of FAST Application Software, 150 points	EPCZEMSD0L1015
		• Licence for use of FAST Application Software, 200 points	EPCZEMSD0L1020
		• Licence for use of FAST Application Software, 300 points	EPCZEMSD0L1030
		• Licence for use of FAST Application Software, 400 points	EPCZEMSD0L1040
		• Licence for use of FAST Application Software, 500 points	EPCZEMSD0L1050
		• Licence for use of FAST Application Software, 600 points	EPCZEMSD0L1060
		• Licence for use of FAST Application Software, 700 points	EPCZEMSD0L1070
		• Licence for use of FAST Application Software, 1000 points	EPCZEMSD0L1100
		• Licence for use of FAST Application Software, 1200 points	EPCZEMSD0L1120
		• Licence for use of FAST Application Software, 1500 points	EPCZEMSD0L1150
		• Licence for use of FAST Application Software, 2000 points	EPCZEMSD0L1200
		• Licence for use of FAST Application Software, 2500 points	EPCZEMSD0L1250
		• Licence for use of FAST Application Software, 3000 points	EPCZEMSD0L1300
		• Licence for use of FAST Application Software, 4000 points	EPCZEMSD0L1400

FAST technology modules

Technology module		Function	Points for use
Virtual Master		Implementation of a virtual master axis in the machine	25
Electrical Shaft		Synchronisation and coupling of drives with precise speed and positioning.	
Flex Cam		Implementation of one or several electric cams. Flexible management of curves created online and offline.	50
Cross Cutter		Synchronised movements of drives for cross-sealing and/or cross-cutting of products.	100
Register control		Implementation of a clock-synchronised drive for generating a register control with print mark detection.	



Application Credit

FAST technology modules

Technology module		Function	Points for use
Winder Dancer		Implementation of a winding drive with dancer position control and/or a winding drive with tensile force/speed control	100
Table Positioning		Positioning profiles for single axes with smoothing and touch probe positioning	50
Flying Saw		Cutting and processing of material while moving	100

Technology module		Function	Kinematics		Function	Points for use
Pick&Place		Implementation of complex three-dimensional movements by means of profiles for up to four drives with different kinematics.	Portal		Universal Cartesian portal kinematics with 2, 3 and 4 degrees of freedom for Pick&Place with high load capacities and big workspaces	100
			Belt portal		Universally usable belt kinematics with 2 degrees of freedom *	
			Delta 2		Parallel kinematics with 2 degrees of freedom * for highly dynamic Pick&Place tasks	200
			Delta 3		Parallel kinematics with 3 degrees of freedom * for highly dynamic Pick&Place tasks	
			Scara		Universal serial Scara kinematics with 2 and 3 degrees of freedom	
			Articulated P		Special form of an articulated arm kinematics with 4 degrees of freedom especially suitable for palletizing	

FAST dimensioning

The FAST modules can be connected easily with the PLC Designer. Which module is to be selected, depends on the automation dimensioning of the machine. In order to define the correct Application Credit, the points of each module simply have to be added up.

Example 1:
- 1x Virtual Master (25 points)
- 1x Electrical Shaft (25 points)
- 2x Winder Dancer (200 points)
- 1x Cross Cutter (100 points)

Result: 350 points

Example 2:
- 1x Virtual Master (25 points)
- 1x Electrical Shaft (25 points)
- 2x Flex Cam (100 points)

Result: 150 points



Application Credit

FAST Motion

FAST Motion features a scalable programming of function blocks based on »PLCopen motion control«.

Fast Motion		Function	Points for use
Motion Control		**Positioning:** FAST Motion basic functions for single-axis movements according to PLCopen Motion Control (formerly part 1) for positioning. This serves to freely program flexible positioning modes and further single-axis movements in IEC 61131.	150
		**Camming:** FAST Motion basic functions for synchronisation and cam movements according to PLCopen Motion Control (formerly part 2). This serves to freely program flexible axis synchronisations and cams for single axes in IEC 61131.	
Coordinated Motion		**Robotics:** FAST Motion basic functions for coordinated three-dimensional movements according to PLCopen Coordinated Motion Control (part 4). This serves to interpolate flexible axis groups as, for instance, robot kinematics in a multidimensional space. Programming is made in IEC 61131. Also contains "Positioning" and "Camming".	300



SD card and USB flash drive

SD cards and USB flash drives are available for data storage and data backups.

- ► A SD card is part of the scope of supply of the controller.
- ► SD card without Application Credit.

Mode		Features	Product key
Application Credit 0		• 512 MB	
USB flash drive		• 1 GB	EPCZEMUS4
		• 4 GB	EPCZEMUS6

24 V power supply unit

An external power supply unit is also available as an alternative for powering the controller's control electronics.



24 V power supply unit

Rated data

Product key			EZV2400-000
Rated voltage			
AC	$U_{N, AC}$	[V]	230
Rated mains current			
	$I_{N, AC}$	[A]	1.20
Output voltage			
	U_{out}	[V]	DC 22.5 ...28.5
Rated current			
	I_N	[A]	10.0
Dimensions			
	h x b x t	[mm]	130 x 85 x 125
Mass			
	m	[kg]	1.24



CAN bus connector

The connector is used to connect the CAN to inverters which are provided with a Sub-D connection for the CAN bus. An integrated CAN terminating resistor can be switched on/off. Internal spring terminals make the use of special mounting tools superfluous. The switch setting can be read from two sides.

Mode		Features	Product key
CAN bus connector: Node		• Sub-D, 90° • Screw terminals	EPM-T950
CAN bus connector: Terminating		• Sub-D, 90° • Screw terminals • Integrated terminating resistor	EPM-T951
CAN bus connector: Straight		• Sub-D, 180° • Screw terminals • Switchable terminating resistor	EPM-T952
CAN bus connector: Switch		• Sub-D, 90° • Spring-loaded terminal • Switchable terminating resistor	EWZ0046

External energy storages

Some controllers provide the opportunity to realise a UPS functionality by means of an external energy storage. Depending on the version, there is the option to safe the data remanently and switch off the system specifically.

Mode		Features	Product key
CAPS pack		• Capacitor pack for Controller 3241 C and p500 for implementing UPS functionality	EPCZEBVC
Extension cable		• 10 m (for 3241 C)	EYC0042V0100R01T01





Controller c300



Controller c300



Contents

General information	Product key	3.2 - 4
	Equipment	3.2 - 5
	Product information	3.2 - 6
	Lenze FAST	3.2 - 8
Technical data	Standards and operating conditions	3.2 - 10
	Rated data	3.2 - 11
	Dimensions	3.2 - 12
Interfaces	Connection plan	3.2 - 13
	Mains connection	3.2 - 13
Accessories	Application Credit	3.2 - 14
	SD card and USB flash drive	3.2 - 17
	24 V power supply unit	3.2 - 17



Product key

Product	Product key
c300	C30GAC00000F3G ☐ XXX-0200C ☐ 00000

Option interface MC 1

0 – No

Runtime software control technology

3 – FAST Runtime



Controller c300



Equipment

4 LEDs
Status display

USB
USB flash drive connection for backup and maintenance

Option interface
Bus system extension (in preparation)

Supply voltage
DC 24 V



CANopen Master and Slave
Status display

I/O System 1000
- up to 64 modules
- Analog and digital inputs and outputs
- additional modules

SD card
Data memory for project data

LAN 1
Ethernet 10/100 Mbps

EtherCAT Master
(in preparation)



Product information

Based on the 3200 C, the c300 fits seamlessly into our platform which is built on a consistently modern system architecture. The benefits: within the Controller-based Automation system, the precisely tailored Controller c300 takes responsibility for all of your control tasks. It focusses primarily on basic control (PLC) and motion tasks. Space-saving and intelligent at the same time.



Highlights

- Small control system with I/O modules which can be connected in series and integrated master interfaces for EtherCAT and CanOpen
- Easy standard set-up and data backup via USB flash drive
- Can be extended with communication interface PROFINET-Device)
- uture-proof due to compliance with industrial standards
- High system-availability
  - Integrated UPS solution
  - Easy device replacement thanks to replaceable memory card
- No maintenance required thanks to batteryless and fanless design

I/O system 1000 as local I/Os

At a speed of 48 Mbps, which is extremely fast, the c300 controller and the I/O modules communicate with each other via an extremely efficient backplane bus. Like this, it is possible to mount a great variety of configurations of the IO system directly on the controller in a flexible fashion. Precisely tailored to your application.



Product information




Logic (PLC) and motion in a single device
- Optimised for machines/machine modules with central motion control
- Easy engineering thanks to central data storage



High-precision control for optimum manufacturing results
- Touch probe-compatible inputs
- High-precision output control
- Highly deterministic backplane bus with precise 1 µs time stamp



Easy to use
- Automated standard set-up and data backup via USB stick
- Easy device replacement by the pluggable SD card Application Credit 0
- Diagnostics via implemented web server or EASY Starter



Prepared for the future thanks to compliance with industrial standards
- Programming in IEC61131-3
- Motion Control as per PLCopen
- PLC Designer based on CODESYS3



Communicative
- EtherCAT® as a fast bus system directly on board (in preparation)
- CANopen on board
- Precisely tailored by modular extension option



I/O system 1000 as local I/Os
- Permanent wiring due to separation of electronics and base module
- Fast diagnostics achieved thanks to clear labelling of the LEDs assigned to each channel
- Easy connection thanks to inclusion of printed circuit diagram
- Fully integrated shield connection without special shield terminals




Lenze FAST

Lenze FAST (Feasibly Applicable Software Toolbox) provides Lenze standard software modules for easily developing a modular machine control.

For this purpose, the »PLC Designer« engineering tool with the "FAST Application Template" provides for an easy programming and commissioning as standardised software structure and with predefined technology modules.

FAST Motion functions serve to implement individual extensions. The »EASY Starter« can be used to subsequently optimise and diagnose the system.

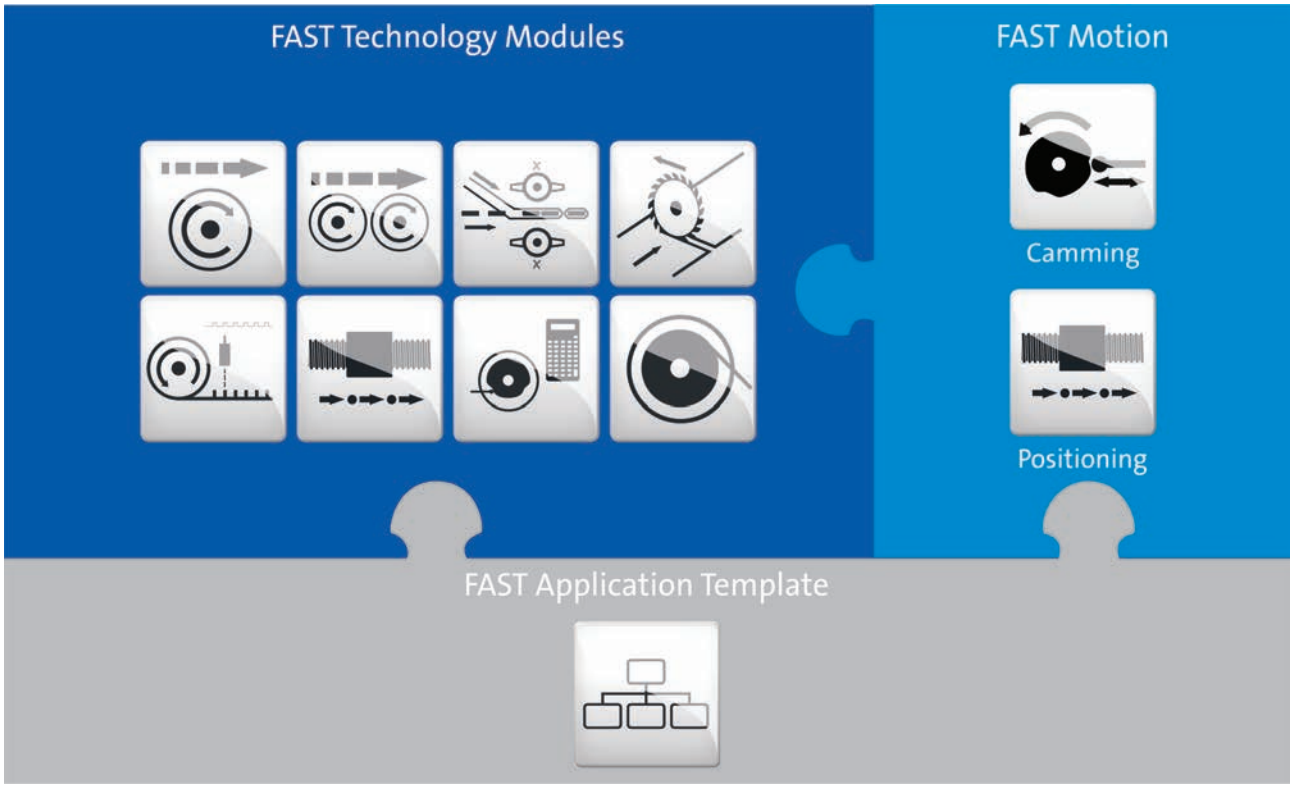

FAST Application Template

The FAST Application Template is standardised by Lenze for a modularised and clear programming in the »PLC Designer«.

The FAST Application Template can be used via a library in the »PLC Designer«. The library contains the structure and basic functionality of the FAST Application Template (as, for instance, state machine and error handling).



Lenze FAST

FAST technology modules

The predefined FAST technology modules serve to easily implement the desired machine functions.

The FAST technology modules are standardised software modules for a modular programming of the machine control. A FAST technology module features a complete and pre-tested drive function. Integrated basic functions and an integrated visualisation provide for an easy commissioning and testing of the modules. The reusability of the modules increases the quality of the software and considerably reduces the time required for programming, commissioning and testing.

The FAST technology modules are contained in the »PLC Designer« as independent function blocks in a library. They use the standardised interfaces and can thus be easily integrated into the machine program, combined in any way and extended individually with FAST Motion functions.

FAST Motion

FAST Motion provides full flexibility and scalability for programming and comprises optimised function blocks based on "PLCopen motion control":

- "Motion Control" modules (based on PLCopen Motion Control (formerly part 1+2) are optimised for the basic functions "positioning" and "cams" (synchronising).

If the functionalities of the FAST technology modules are not sufficient, they can be adapted and extended individually using the FAST Motion modules. These modules are capable to program any number of functions.

The »PLC Designer« contains the "Motion Control" modules in two libraries.



Standards and operating conditions

Mode			
Controller			c300
Conformity			
CE			Low-Voltage Directive
			2014/30/EU
EAC			TP TC 020/2011 (TR CU 020/2011)
Approval			
UL 508C			Process Control Equipment (File-No. E236341)
UL/CSA			CSA C22.2 No. 61010-2-201 UL 61010-2-201
Degree of protection			
EN 60529			IP20
NEMA 250			
Climatic conditions			
Storage (EN 60721-3-1)			1K3 (Temperature: -5 °C ... +45 °C)
Transport (EN 60721-3-2)			2K3 (temperature: -25 °C ... +70 °C)
Operation (EN 60721-3-3)			3K3 (temperature: 0 °C ... +55 °C)
Degree of pollution			
EN 61131-2			2
Site altitude			
Amsl	H_{max}	[m]	2000
Vibration resistance			
Vibration (EN 61131-2)			1 g
Mechanical shock (EN 61131-2)			15 g
Noise emission			
EN 61000-6-4			Industrial premises
Noise immunity			
EN 61000-4-2			ESD: Severity 3
EN 61000-4-6			150 kHz ... 80 MHz, 10 V/m 80 % AM (1 kHz)
EN 61000-4-3			80 kHz ... 1000 MHz, 10 V/m 80 % AM (1 kHz) 1.4 GHz ... 2.0 GHz, 3 V/m, 80 % AM (1kHz) 2.0 GHz ... 2.7 GHz, 1 V/m, 80 % AM (1kHz)
EN 61000-4-4			Burst: Severity 3




Rated data

			
Mode			
Controller			c300
Processor type			
Fanless			ARM Cortex A8800
Storage medium			
SD card		[MB]	512
Interfaces			
Ethernet			1
EtherCAT Master			1
CANopen			1
USB			1
Rated voltage			
DC	$U_{N, DC}$	[V]	24
Max. current consumption			
With connected I/Os	I_{max}	[A]	0.70
Without connected I/Os	I_{max}	[A]	0.60
Operating system			
			Windows® Embedded Compact 7
Memory size			
Retain data		[kB]	128
Main memory (RAM)		[MB]	512
Min. internal flash memory		[GB]	2
Runtime			
FAST Runtime			●
Visualisation			●
Dimensions			
	h x b x t	[mm]	127 x 42 x 102
Mass			
	m	[kg]	0.33

[1] In preparation.




Dimensions

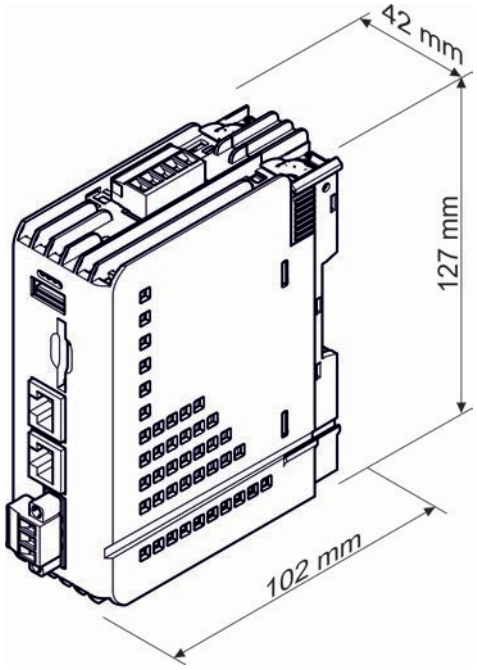




Connection plan

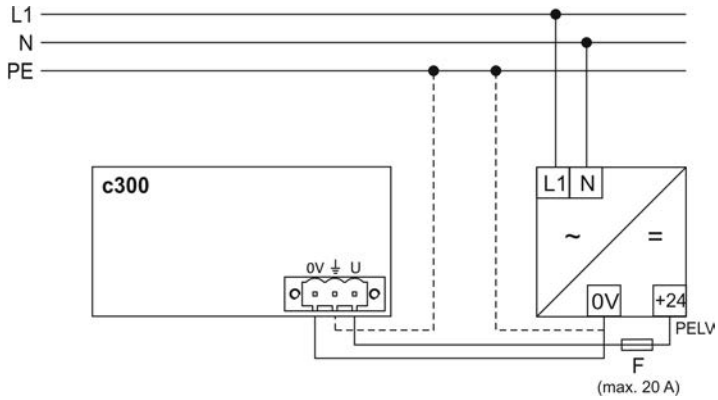

Mains connection

	Connection	Connection type	Cable type
	DC supply (24 V)	3-pole Combicon socket	Cable with Combicon-plug (cable cross-section max. 2.5 mm^2)



Application Credit

With Lenze FAST, technology modules for motion control are provided.
In order that these modules are used, the following Application Credit is required.
If different technology modules are used, the demand for Application Credit must be added for all modules used.

Mode		Features	Product key
Application Credit		• Licence for use of FAST Application Software, 100 points	EPCZEMSD0L1010
		• Licence for use of FAST Application Software, 150 points	EPCZEMSD0L1015
		• Licence for use of FAST Application Software, 200 points	EPCZEMSD0L1020
		• Licence for use of FAST Application Software, 300 points	EPCZEMSD0L1030
		• Licence for use of FAST Application Software, 400 points	EPCZEMSD0L1040
		• Licence for use of FAST Application Software, 500 points	EPCZEMSD0L1050
		• Licence for use of FAST Application Software, 600 points	EPCZEMSD0L1060
		• Licence for use of FAST Application Software, 700 points	EPCZEMSD0L1070
		• Licence for use of FAST Application Software, 1000 points	EPCZEMSD0L1100
		• Licence for use of FAST Application Software, 1200 points	EPCZEMSD0L1120
		• Licence for use of FAST Application Software, 1500 points	EPCZEMSD0L1150
		• Licence for use of FAST Application Software, 2000 points	EPCZEMSD0L1200
		• Licence for use of FAST Application Software, 2500 points	EPCZEMSD0L1250
		• Licence for use of FAST Application Software, 3000 points	EPCZEMSD0L1300
		• Licence for use of FAST Application Software, 4000 points	EPCZEMSD0L1400

FAST technology modules

Technology module		Function	Points for use
Virtual Master		Implementation of a virtual master axis in the machine	25
Electrical Shaft		Synchronisation and coupling of drives with precise speed and positioning.	
Flex Cam		Implementation of one or several electric cams. Flexible management of curves created online and offline.	50
Cross Cutter		Synchronised movements of drives for cross-sealing and/or cross-cutting of products.	100
Register control		Implementation of a clock-synchronised drive for generating a register control with print mark detection.	



Application Credit

FAST technology modules

Technology module		Function	Points for use
Winder Dancer		Implementation of a winding drive with dancer position control and/or a winding drive with tensile force/speed control	100
Table Positioning		Positioning profiles for single axes with smoothing and touch probe positioning	50
Flying Saw		Cutting and processing of material while moving	100

FAST dimensioning

The FAST modules can be connected easily with the PLC Designer. Which module is to be selected, depends on the automation dimensioning of the machine. In order to define the correct Application Credit, the points of each module simply have to be added up.

Example 1:
- 1x Virtual Master (25 points)
- 1x Electrical Shaft (25 points)
- 2x Winder Dancer (200 points)
- 1x Cross Cutter (100 points)

Result: 350 points

Example 2:
- 1x Virtual Master (25 points)
- 1x Electrical Shaft (25 points)
- 2x Flex Cam (100 points)

Result: 150 points



Application Credit

FAST Motion

FAST Motion features a scalable programming of function blocks based on »PLCopen motion control«.

Fast Motion		Function	Points for use
Motion Control		**Positioning:** FAST Motion basic functions for single-axis movements according to PLCopen Motion Control (formerly part 1) for positioning. This serves to freely program flexible positioning modes and further single-axis movements in IEC 61131.	150
		**Camming:** FAST Motion basic functions for synchronisation and cam movements according to PLCopen Motion Control (formerly part 2). This serves to freely program flexible axis synchronisations and cams for single axes in IEC 61131.	



SD card and USB flash drive

SD cards and USB flash drives are available for data storage and data backups.

- ► A SD card is part of the scope of supply of the controller.
- ► SD card without Application Credit.

Mode		Features	Product key
Application Credit 0		• 512 MB	
USB flash drive		• 1 GB	EPCZEMUS4
		• 4 GB	EPCZEMUS6

24 V power supply unit

An external power supply unit is also available as an alternative for powering the controller's control electronics.



24 V power supply unit

Rated data

Product key			EZV2400-000
Rated voltage			
AC	$U_{N, AC}$	[V]	230
Rated mains current			
	$I_{N, AC}$	[A]	1.20
Output voltage			
	U_{out}	[V]	DC 22.5 ...28.5
Rated current			
	I_N	[A]	10.0
Dimensions			
	h x b x t	[mm]	130 x 85 x 125
Mass			
	m	[kg]	1.24







Controller p500



Controller p500

Contents



General information	Product key	3.3 - 4
	Equipment	3.3 - 5
	Product information	3.3 - 6
	Lenze FAST	3.3 - 8
Technical data	Standards and operating conditions	3.3 - 10
	Rated data	3.3 - 11
	Dimensions	3.3 - 13
Interfaces	Connection plan	3.3 - 14
	Mains connection	3.3 - 14
Accessories	Application Credit	3.3 - 15
	SD card and USB flash drive	3.3 - 18
	24 V power supply unit	3.3 - 18
	CAN bus connector	3.3 - 19
	Protection films	3.3 - 19



Product key

Product	Product key
p300	P30GA ☐ ☐ 0300F3G ☐ XXX-0200C ☐ 1 ☐ 000

Type
P - Panel Controller
H - HMI

Display diagonal
8 – 10.9 cm (4.3 “)
9 – 17.8 cm (7 “)
4 – 26.4 cm (10.4 “)

Option interface MC 1
0 – No

Runtime software control technology
0 – No
3 – FAST Runtime


Power tags
4 – 500 power tags
5 – 1000 power tags



Controller p500 - 17.8 cm (7")




Controller p500 - 26.4 cm (10.4")

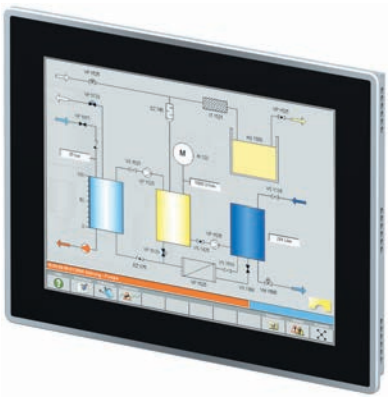

Controller p500 - 38.1 cm (15")



Equipment

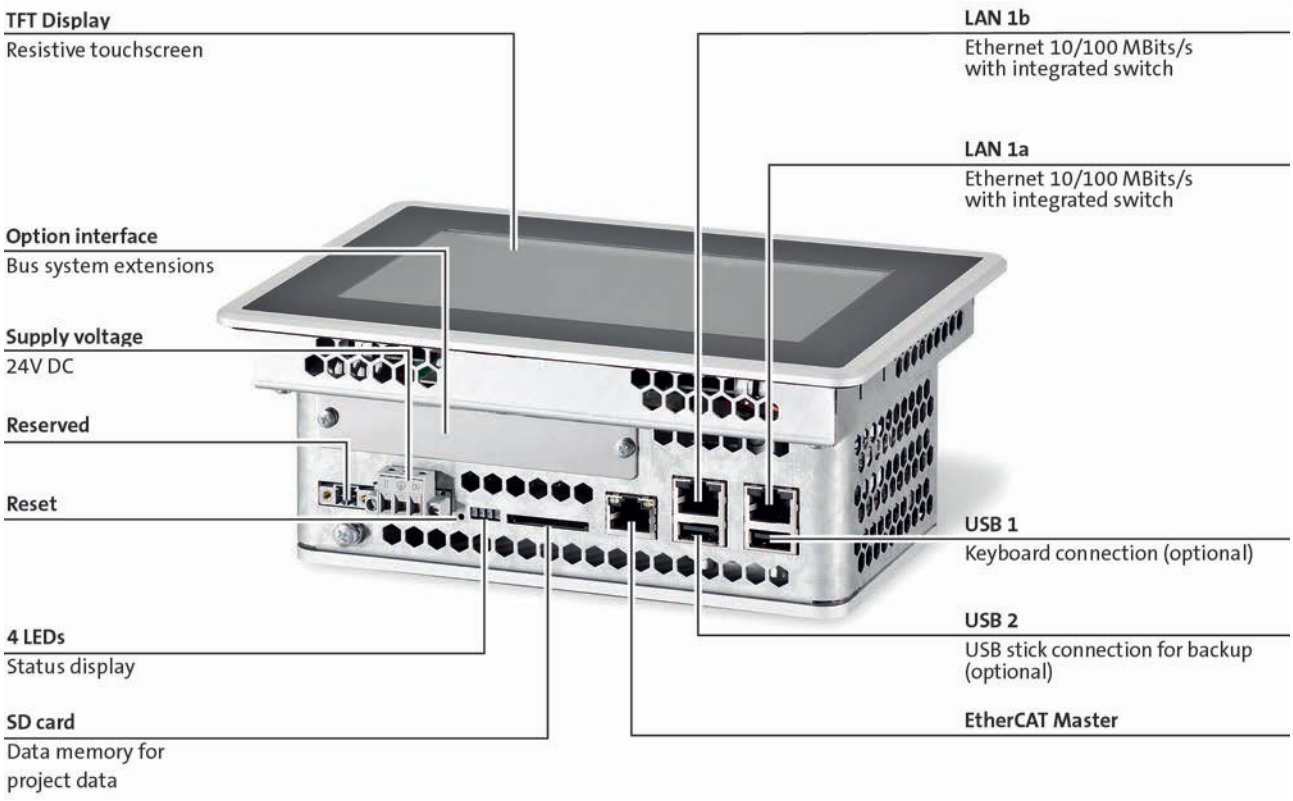

TFT Display
Resistive touchscreen
Option interface
Bus system extensions
Supply voltage
24V DC
Reserved
Reset
4 LEDs
Status display
SD card
Data memory for project data
LAN 1b
Ethernet 10/100 MBits/s with integrated switch
LAN 1a
Ethernet 10/100 MBits/s with integrated switch
USB 1
Keyboard connection (optional)
USB 2
USB stick connection for backup (optional)
EtherCAT Master



Product information

Control and visualisation combined in a compact unit.
We have taken yet another step towards creating an easier future with the p500 – a perfect combination of maintenance-free panel-mounted controller, logic (PLC), motion and visualisation in a single device. It is ideally suited for use as a control and visualisation system within Controller-based Automation systems, suiting applications with central motion control or as a visualisation device within a drive-based automation system.

Highlights
- Logic (PLC), motion and visualisation in a single device
- Machine-oriented and high-precision control for optimum manufacturing results
- Easy to use
- Prepared for the future thanks to compliance with industrial standards

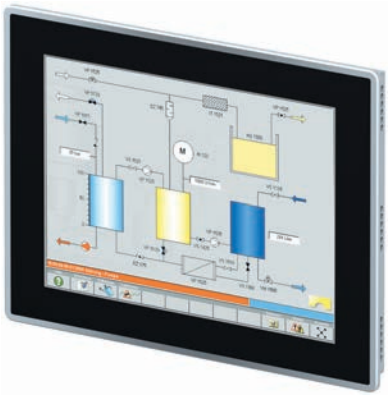

Controller p500 - 38.1 cm (15")

Versions
The p500 device series encompasses 3 versions, which only differ in terms of their screen size. All other technical properties are absolutely identical.

Integrated Ethernet switch
The integrated switch allows line topologies to be established using Ethernet without the need for a separate switch as an infrastructure component. In addition to this, a free interface provides allows a diagnostics device such as a service technician's laptop to be connected without having to access the bus physics.



Product information




Logic (PLC), motion and visualisation in a single device
- Optimised for machine(modules) with central motion control
- Easy engineering thanks to central data storage



Easy to use
- Easy use of FAST via pluggable SD card with Application Credit for Motion Control or Coordinated Motion
- Automated standard set-up and data backup via USB stick
- Easy device replacement by means of the pluggable SD card with the corresponding Application Credit
- Diagnostics by implemented web server or EASY Starter



High degree of system availability
- Maintenance-free
- Fanless
- No battery



Prepared for the future thanks to compliance with industrial standards
- Programming in IEC61131-3
- Motion Control as per PLCopen
- PLC Designer based on CODESYS3



Communicative
- EtherCAT® as a fast bus system directly on board (in preparation)
- CANopen on board
- Precisely tailored by modular extension option



Variable front panel concept
- Easy customizing of the front panels (foils, smart customising)




Lenze FAST

Lenze FAST (Feasibly Applicable Software Toolbox) provides Lenze standard software modules for easily developing a modular machine control.

For this purpose, the »PLC Designer« engineering tool with the "FAST Application Template" provides for an easy programming and commissioning as standardised software structure and with predefined technology modules.

FAST Motion functions serve to implement individual extensions. The »EASY Starter« can be used to subsequently optimise and diagnose the system.

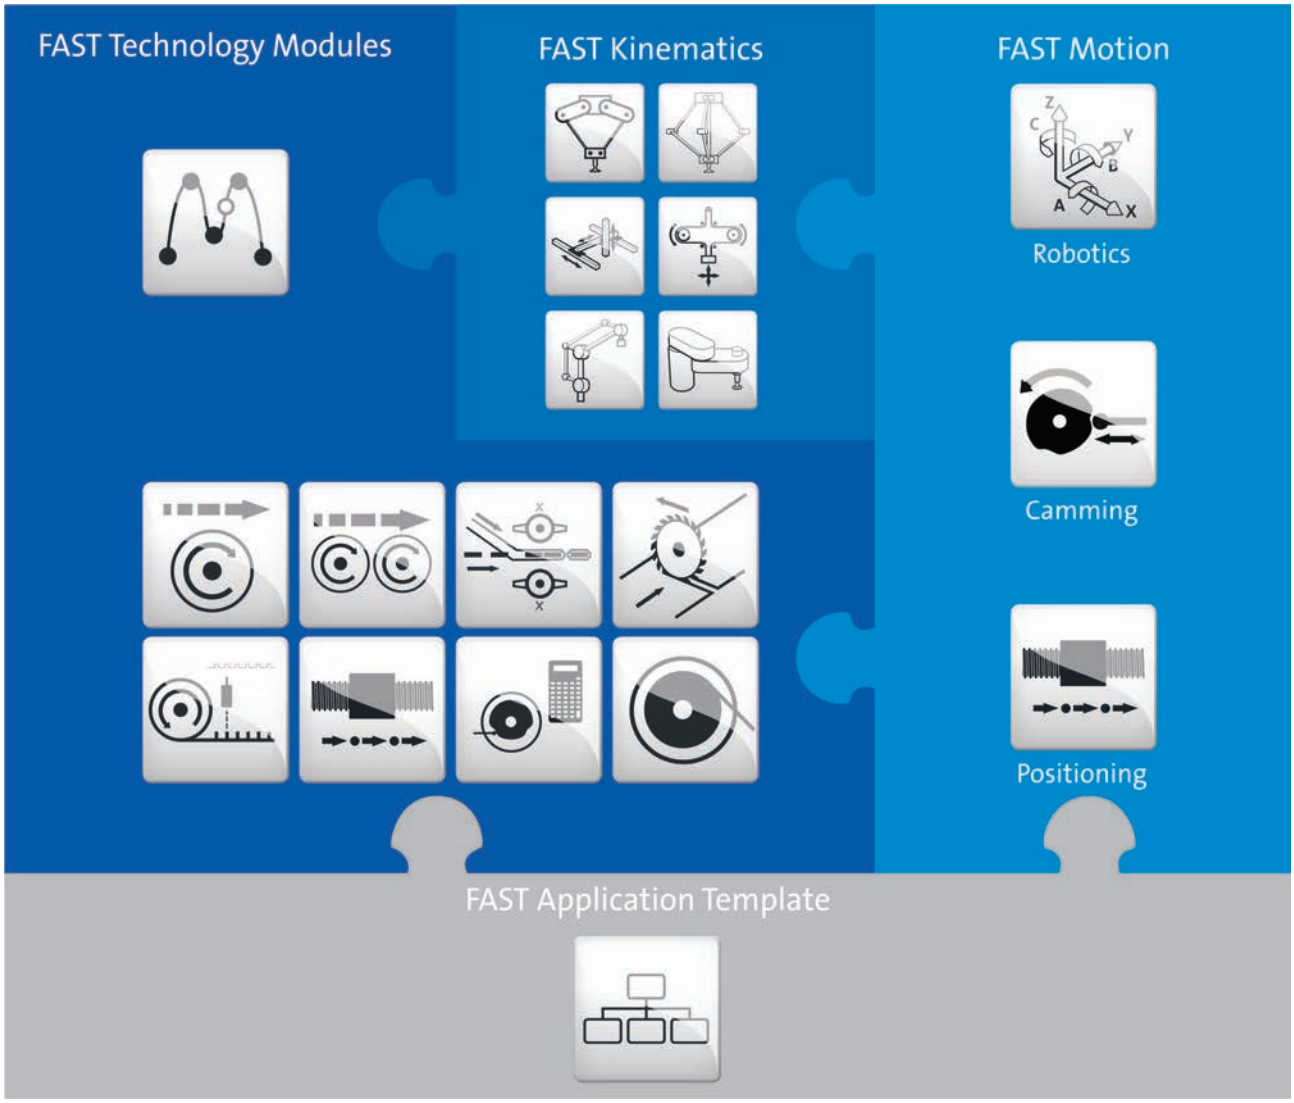

FAST Application Template

The FAST Application Template is standardised by Lenze for a modularised and clear programming in the »PLC Designer«.

The FAST Application Template can be used via a library in the »PLC Designer«. The library contains the structure and basic functionality of the FAST Application Template (as, for instance, state machine and error handling).



Lenze FAST

FAST technology modules

The predefined FAST technology modules serve to easily implement the desired machine functions.

The FAST technology modules are standardised software modules for a modular programming of the machine control. A FAST technology module features a complete and pre-tested drive function. Integrated basic functions and an integrated visualisation provide for an easy commissioning and testing of the modules. The reusability of the modules increases the quality of the software and considerably reduces the time required for programming, commissioning and testing.

The FAST technology modules are contained in the »PLC Designer« as independent function blocks in a library. They use the standardised interfaces and can thus be easily integrated into the machine program, combined in any way and extended individually with FAST Motion functions.

FAST Motion

FAST Motion provides full flexibility and scalability for programming and comprises optimised function blocks based on "PLCopen motion control":

- "Motion Control” modules (based on PLCopen Motion Control (formerly part 1+2) are optimised for the basic functions "positioning" and "cams" (synchronising).
- "Coordinated Motion" modules (based on PLCopen Coordinated Motion (part 4) are optimised for multi-axis coordinated three-dimensional movements – which can also be controlled via the FAST technology module "Pick & Place".

If the functionalities of the FAST technology modules are not sufficient, they can be adapted and extended individually using the FAST Motion modules. These modules are capable to program any number of functions.

The »PLC Designer« contains the "Motion Control" modules in two libraries and the "Coordinated Motion" modules in one library.



Standards and operating conditions

Mode			
Controller			p500
Conformity			
CE			Low-Voltage Directive
			2014/30/EU
EAC			TP TC 020/2011 (TR CU 020/2011)
Approval			
UL 508C			Process Control Equipment (File-No. E236341)
UL/CSA			CSA 22.2 No.142
Degree of protection			
EN 60529			IP65 (front) IP20 (back)
NEMA 250			Type 1
Climatic conditions			
Storage (EN 60721-3-1)			1K3 (Temperature: -5 °C ... +45 °C)
Transport (EN 60721-3-2)			2K3 (temperature: -25 °C ... +70 °C)
Operation (EN 60721-3-3)			3K3 (temperature: 0 °C ... +55 °C)
Degree of pollution			
EN 61131-2			2
Site altitude			
Amsl	H_{max}	[m]	3000
Vibration resistance			
Vibration (EN 61131-2)			1 g
Mechanical shock (EN 61131-2)			15 g
Operation (Germanischer Lloyd)			5 Hz ≤ f ≤ 13.2 Hz: ± 1 mm amplitude
Noise emission			
EN 61000-6-4			Industrial premises
Noise immunity			
EN 61000-4-2			ESD: Severity 3
EN 61000-4-6			150 kHz ... 80 MHz, 10 V/m 80 % AM (1 kHz)
EN 61000-4-3			80 kHz ... 1000 MHz, 10 V/m 80 % AM (1 kHz) 1.4 GHz ... 2.0 GHz, 3 V/m, 80 % AM (1kHz) 2.0 GHz ... 2.7 GHz, 1 V/m, 80 % AM (1kHz)
EN 61000-4-4			Burst: Severity 3

Controller p500

Technical data



Rated data

						
Mode						
Controller				p500		
Display						
Screen diagonal			[cm]	17.8	26.4	38.1
			["]	7.0	10.4	15.0
Display				TFT		
Design				color		
Type				Graphics		
Number of colours				262144		
Resolution			[Pixel]	800 x 480	800 x 600	1024 x 768
Brightness			[cd/m²]	320	400	
Contrast				1 : 400	1 : 700	
Operator control						
Screen				Resistive touchscreen		
Processor type						
Fanless				Intel® Atom™ 1.6 GHz		
Storage medium						
SD card [1]			[MB]	512		
Interfaces						
Ethernet (integrated switch)				2		
EtherCAT				1		
USB				2		
Option				Interface connection for CANopen (MC-CAN2) Interface connection for PROFIBUS Slave (MC-PBS) Interface connection for PROFINET-Device (MC-PND) Interface connection for EtherCAT (MC-ETH)		
Supply voltage						
DC	U_{in}	± 25 %	[V]	24		
Max. current consumption						
	I_{max}		[A]	0.50 [2] 1.20 [3]	0.60 [2] 1.30 [3]	0.70 [2] 1.50 [3]
Operating system						
				Windows® CE 6.0		

[1] 1 x SD card included in the scope of supply.
[2] Without optional cards and USB load.
[3] 2x 500 mA USB 1+2, with MC-CAN2 module, 30 s max. after switching-on.




Rated data

					
Mode					
Controller			p500		
Display					
Screen diagonal		[cm]	17.8	26.4	38.1
		["]	7.0	10.4	15.0
Memory size					
Program memory		[MB]	512		
Data memory		[MB]	512		
Flags		[kB]	4		
Retain data		[kB]	1024		
Max. number of persistently saved visualisation alarms			10000		
Main memory (RAM)		[GB]	1		
Min. internal flash memory		[GB]	0		
Runtime					
FAST Runtime [1)]			●		
Visualisation			●		
Dimensions					
	h x b x t	[mm]	155 x 210 x 86	240 x 282 x 86	310 x 390 x 93
Mass					
	m	[kg]	1.40	2.50	4.50

[1)] Optional




Dimensions

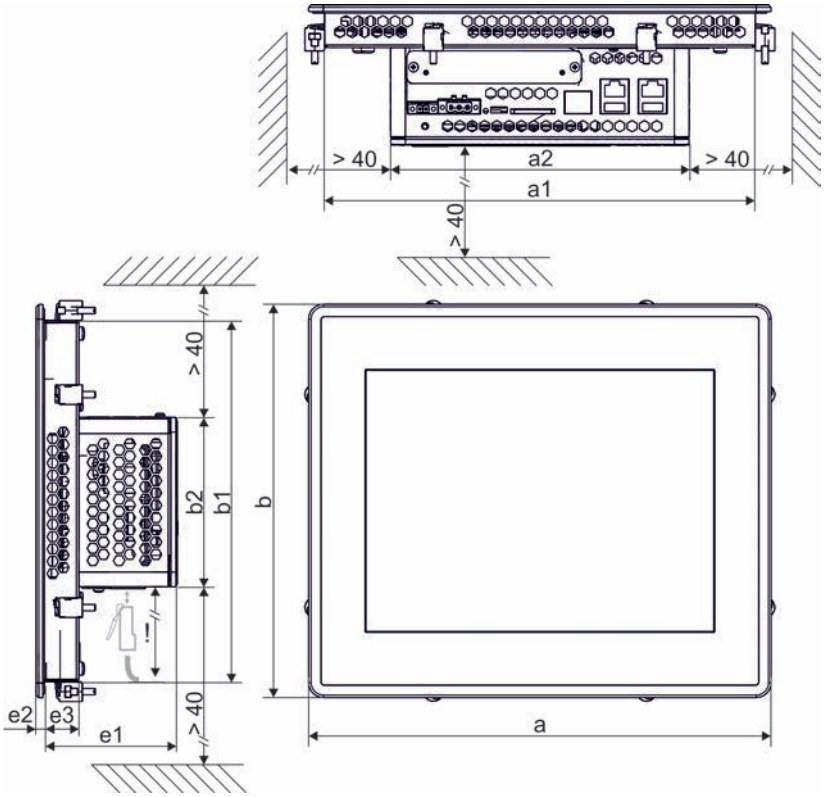

Display		Dimensions								
Screen diagonal										
		a	a_1	a_2	b	b_1	b_2	e_1	e_2	e_3
[cm]	["]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
17.8	7.0	210	191	182	155	136	104	82.0	4.00	22.0
26.4	10.4	282	263	182	240	221	104	82.0	4.00	22.0
38.1	15.0	390	371	182	310	291	104	87.0	6.00	27.0



Connection plan

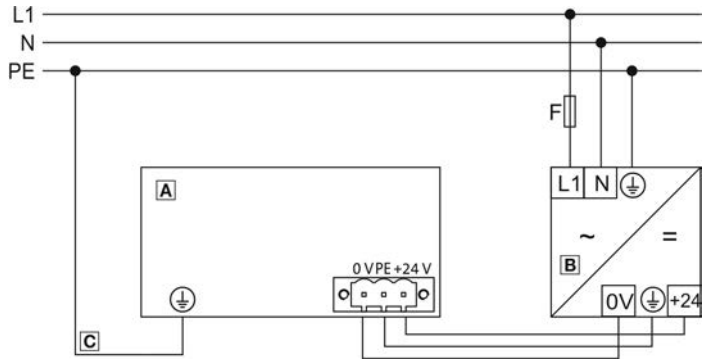

Position	Meaning
A	Controller
B	Power supply unit
C	Protective earth connection on the supply side (PE, internally bridged with GND)

Mains connection

	Connection	Connection type	Cable type
	DC supply (24 V)	3-pole Combicon socket	Cable with Combicon-plug (cable cross-section max. 2.5 mm²)
	PE connection	M4 (PH 2)	Separate earth conductor (1.2 ... 2.5 mm² with ring cable lug)



Application Credit

With Lenze FAST, technology modules are provided for Motion Control and Coordinated Motion. In order that these modules are used, the following Application Credit is required.
If different technology modules are used, the demand for Application Credit must be added for all modules used.

Mode		Features	Product key
Application Credit		• Licence for use of FAST Application Software, 100 points	EPCZEMSD0L1010
		• Licence for use of FAST Application Software, 150 points	EPCZEMSD0L1015
		• Licence for use of FAST Application Software, 200 points	EPCZEMSD0L1020
		• Licence for use of FAST Application Software, 300 points	EPCZEMSD0L1030
		• Licence for use of FAST Application Software, 400 points	EPCZEMSD0L1040
		• Licence for use of FAST Application Software, 500 points	EPCZEMSD0L1050
		• Licence for use of FAST Application Software, 600 points	EPCZEMSD0L1060
		• Licence for use of FAST Application Software, 700 points	EPCZEMSD0L1070
		• Licence for use of FAST Application Software, 1000 points	EPCZEMSD0L1100
		• Licence for use of FAST Application Software, 1200 points	EPCZEMSD0L1120
		• Licence for use of FAST Application Software, 1500 points	EPCZEMSD0L1150
		• Licence for use of FAST Application Software, 2000 points	EPCZEMSD0L1200
		• Licence for use of FAST Application Software, 2500 points	EPCZEMSD0L1250
		• Licence for use of FAST Application Software, 3000 points	EPCZEMSD0L1300
		• Licence for use of FAST Application Software, 4000 points	EPCZEMSD0L1400

FAST technology modules

Technology module		Function	Points for use
Virtual Master		Implementation of a virtual master axis in the machine	25
Electrical Shaft		Synchronisation and coupling of drives with precise speed and positioning.	
Flex Cam		Implementation of one or several electric cams. Flexible management of curves created online and offline.	50
Cross Cutter		Synchronised movements of drives for cross-sealing and/or cross-cutting of products.	100
Register control		Implementation of a clock-synchronised drive for generating a register control with print mark detection.	



Application Credit

FAST technology modules

Technology module		Function	Points for use
Winder Dancer		Implementation of a winding drive with dancer position control and/or a winding drive with tensile force/speed control	100
Table Positioning		Positioning profiles for single axes with smoothing and touch probe positioning	50
Flying Saw		Cutting and processing of material while moving	100

Technology module		Function	Kinematics		Function	Points for use
Pick&Place		Implementation of complex three-dimensional movements by means of profiles for up to four drives with different kinematics.	Portal		Universal Cartesian portal kinematics with 2, 3 and 4 degrees of freedom for Pick&Place with high load capacities and big workspaces	100
			Belt portal		Universally usable belt kinematics with 2 degrees of freedom *	
			Delta 2		Parallel kinematics with 2 degrees of freedom * for highly dynamic Pick&Place tasks	200
			Delta 3		Parallel kinematics with 3 degrees of freedom * for highly dynamic Pick&Place tasks	
			Scara		Universal serial Scara kinematics with 2 and 3 degrees of freedom	
			Articulated P		Special form of an articulated arm kinematics with 4 degrees of freedom especially suitable for palletizing	

FAST dimensioning

The FAST modules can be connected easily with the PLC Designer. Which module is to be selected, depends on the automation dimensioning of the machine. In order to define the correct Application Credit, the points of each module simply have to be added up.

Example 1:
- 1x Virtual Master (25 points)
- 1x Electrical Shaft (25 points)
- 2x Winder Dancer (200 points)
- 1x Cross Cutter (100 points)

Result: 350 points

Example 2:
- 1x Virtual Master (25 points)
- 1x Electrical Shaft (25 points)
- 2x Flex Cam (100 points)

Result: 150 points



Application Credit

FAST Motion

FAST Motion features a scalable programming of function blocks based on »PLCopen motion control«.

Fast Motion		Function	Points for use
Motion Control		**Positioning:** FAST Motion basic functions for single-axis movements according to PLCopen Motion Control (formerly part 1) for positioning. This serves to freely program flexible positioning modes and further single-axis movements in IEC 61131.	150
		**Camming:** FAST Motion basic functions for synchronisation and cam movements according to PLCopen Motion Control (formerly part 2). This serves to freely program flexible axis synchronisations and cams for single axes in IEC 61131.	
Coordinated Motion		**Robotics:** FAST Motion basic functions for coordinated three-dimensional movements according to PLCopen Coordinated Motion Control (part 4). This serves to interpolate flexible axis groups as, for instance, robot kinematics in a multidimensional space. Programming is made in IEC 61131. Also contains "Positioning" and "Camming".	300



SD card and USB flash drive

SD cards and USB flash drives are available for data storage and data backups.

- ► A SD card is part of the scope of supply of the controller.
- ► SD card without Application Credit.

Mode		Features	Product key
Application Credit 0		• 512 MB	
USB flash drive		• 1 GB	EPCZEMUS4
		• 4 GB	EPCZEMUS6

24 V power supply unit

An external power supply unit is also available as an alternative for powering the controller's control electronics.



24 V power supply unit

Rated data

Product key			EZV2400-000
Rated voltage			
AC	$U_{N, AC}$	[V]	230
Rated mains current			
	$I_{N, AC}$	[A]	1.20
Output voltage			
	U_{out}	[V]	DC 22.5 ...28.5
Rated current			
	I_N	[A]	10.0
Dimensions			
	h x b x t	[mm]	130 x 85 x 125
Mass			
	m	[kg]	1.24



CAN bus connector

The connector is used to connect the CAN to inverters which are provided with a Sub-D connection for the CAN bus. An integrated CAN terminating resistor can be switched on/off. Internal spring terminals make the use of special mounting tools superfluous. The switch setting can be read from two sides.


Mode		Features	Product key
CAN bus connector: Node		• Sub-D, 90° • Screw terminals	EPM-T950
CAN bus connector: Terminating		• Sub-D, 90° • Screw terminals • Integrated terminating resistor	EPM-T951
CAN bus connector: Straight		• Sub-D, 180° • Screw terminals • Switchable terminating resistor	EPM-T952
CAN bus connector: Switch		• Sub-D, 90° • Spring-loaded terminal • Switchable terminating resistor	EWZ0046

Protection films

Mode		Features	Product key
17.8 cm (7 ")		• Protection of the surface against chemicals and mechanical damages (Packaging unit: 2 pieces)	EPCZMFD9
26.4 cm (10.4 ")			EPCZMFD4



Controller p300

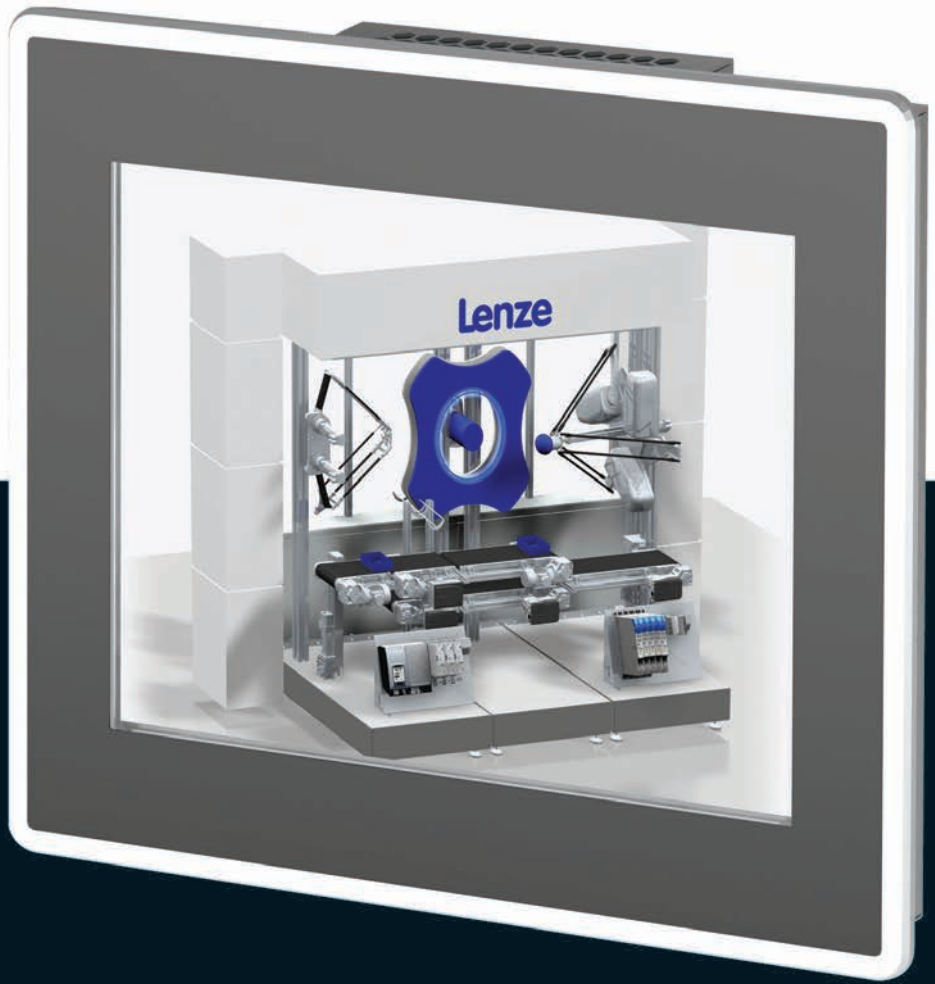

Controller p300



Contents

General information	Product key	3.4 - 4
	Equipment	3.4 - 5
	Product information	3.4 - 6
Technical data	Standards and operating conditions	3.4 - 8
	Rated data	3.4 - 9
	Dimensions	3.4 - 11
Interfaces	Connection plan	3.4 - 12
	Mains connection	3.4 - 12
Accessories	SD card and USB flash drive	3.4 - 13
	24 V power supply unit	3.4 - 13
	CAN bus connector	3.4 - 14
	Protection films	3.4 - 14



Product key

Product	Product key
p300	P30GA □ □ 0300F3G □ XXX-0200C □ 1 □ 000

Type
P - Panel Controller
H - HMI

Display diagonal
8 – 10.9 cm (4.3 “)
9 – 17.8 cm (7 “)
4 – 26.4 cm (10.4 “)

Option interface MC 1
0 – No

Runtime software control technology
0 – No
3 – FAST Runtime

Power tags
4 – 500 power tags
5 – 1000 power tags



Controller p300 - 10.9 cm (4.3")




Controller p300 - 17.8 cm (7")



Controller p300 - 26.4 cm (10.4")



Equipment

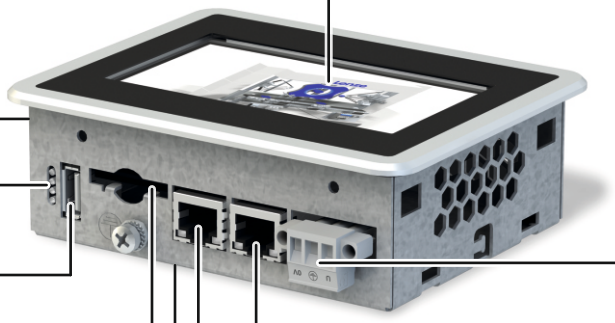

TFT display
resistive touschscreen

CANopen Master and Slave
Status display

4 LEDs
Status display

USB
USB flash drive connection for backup and maintenance

SD card
Data memory for project data

Option interface
Bus system extension

Supply voltage
DC 24 V

EtherCAT Master

LAN 1
Ethernet 10/100 Mbps



Product information

So small, and yet so powerful!
Based on the p500 panel controller, the new p300 fits seamlessly into our platform which is built on a consistently modern system architecture.
It combines logic (PLC) and visualisation in a compact device and is ideally suited to machine applications which only require a low processing power. With the same system properties as its older brother (p500), its true strength lies in its visualisation capabilities when used as an HMI.



Highlights

- Robust industry-compliant Panel Controller available in sizes 10.9 cm (4.3"),17.8 cm (7") and 26.4 cm (10.4")
- For basic to complex control and visualisation tasks
- Uniform engineering in all phases of the customer's machine development process
- High degree of system availability
  - Integrated UPS solution
  - Easy device replacement thanks to replaceable memory card
- No maintenance required thanks to batteryless and fanless design

Variants

The p300 device series comprises 3 variants differing in the display size and therefore in the design and dimension of the front module. The panel controllers are available with screen diagonals of 10.9 cm (4.3"), 17.8 cm (7"), and 26.4 cm (10"). All technical properties of the controller unit are identical in this series.

Operator control and process monitoring functions — p300 as HMI


The strength of the p300 lies in visualisation tasks. With the integrated VisiWinNET® visualisation system and the optional logic control system, the devices are also cost-effective and powerful complete systems for operator control and process monitoring. Thanks to tried-and-tested standard interfaces, the devices offer a variety of options for communication with the Lenze system world as well as with master controls.
For an easy dialog between people and machines.




Product information




Logic (PLC) and visualisation in a single device
- Optimised for machines/modules with central motion control
- Easy engineering thanks to central data storage




Easy to use
- Automated standard set-up and data backup via USB stick
- Easy device replacement by the pluggable SD card Application Credit 0
- Diagnostics via implemented web server or EASY Starter



High degree of system availability
- Maintenance-free
- Fanless
- No battery



Prepared for the future thanks to compliance with industrial standards
- Programming in IEC61131-3
- PLC Designer based on CODESYS 3



Communicative
- EtherCAT® as a fast bus system directly on board (in preparation)
- CANopen on board
- Precisely tailored by modular extension option



Variable front panel concept
- Easy customizing of the front panels (foils, smart customising)



Standards and operating conditions

Mode			
Controller			p300
Conformity			
CE			Low-Voltage Directive
			2014/30/EU
EAC			TP TC 020/2011 (TR CU 020/2011)
Approval			
UL 508C			Process Control Equipment (File-No. E236341)
UL/CSA			CSA C22.2 No. 61010-2-201 UL 61010-2-201
Degree of protection			
EN 60529			IP65 (front) IP20 (back)
NEMA 250			Type 4
Climatic conditions			
Storage (EN 60721-3-1)			1K3 (Temperature: -5 °C ... +45 °C)
Transport (EN 60721-3-2)			2K3 (temperature: -25 °C ... +70 °C)
Operation (EN 60721-3-3)			3K3 (temperature: 0 °C ... +55 °C)
Degree of pollution			
EN 61131-2			2
Site altitude			
Amsl	H_{max}	[m]	2000
Vibration resistance			
Vibration (EN 61131-2)			1 g
Mechanical shock (EN 61131-2)			15 g
Noise emission			
EN 61000-6-4			Industrial premises
Noise immunity			
EN 61000-4-2			ESD: Severity 3
EN 61000-4-6			150 kHz ... 80 MHz, 10 V/m 80 % AM (1 kHz)
EN 61000-4-3			80 kHz ... 1000 MHz, 10 V/m 80 % AM (1 kHz) 1.4 GHz ... 2.0 GHz, 3 V/m, 80 % AM (1kHz) 2.0 GHz ... 2.7 GHz, 1 V/m, 80 % AM (1kHz)
EN 61000-4-4			Burst: Severity 3



Rated data

						
Mode						
Controller				p300		
Display						
Screen diagonal			[cm]	10.9	17.8	26.4
			["]	4.3	7.0	10.4
Display				TFT		
Design				color		
Type				Graphics		
Number of colours				262144		
Resolution			[Pixel]	480 x 272	800 x 480	800 x 600
Brightness			[cd/m²]	400	320	400
Contrast				1 : 400		1 : 700
Operator control						
Screen				Resistive touchscreen		
Processor type						
Fanless				ARM Cortex A8800		
Storage medium						
SD card			[MB]	512		
Interfaces						
Ethernet				1		
EtherCAT Master				1		
CANopen				1		
USB				1		
Option [1]				Interface connection for PROFINET-Device (MC-PND)		
Supply voltage						
DC	U_{in}	± 25 %	[V]	24		
Max. current consumption						
	I_{max}		[A]	0.85	0.90	0.95
Operating system						
				Windows® Embedded Compact 7		

[1] In preparation.




Rated data

					
Mode					
Controller			p300		
Display					
Screen diagonal		[cm]	10.9	17.8	26.4
		["]	4.3	7.0	10.4
Memory size					
Retain data		[kB]	128		
Main memory (RAM)		[MB]	512		
Min. internal flash memory		[GB]	2		
Runtime					
FAST Runtime [1)]			●		
Dimensions					
	h x b x t	[mm]	130 x 104 x 45	210 x 155 x 51	282 x 240 x 51
Mass					
	m	[kg]	0.53	1.10	2.10

[1)] Optional




Dimensions

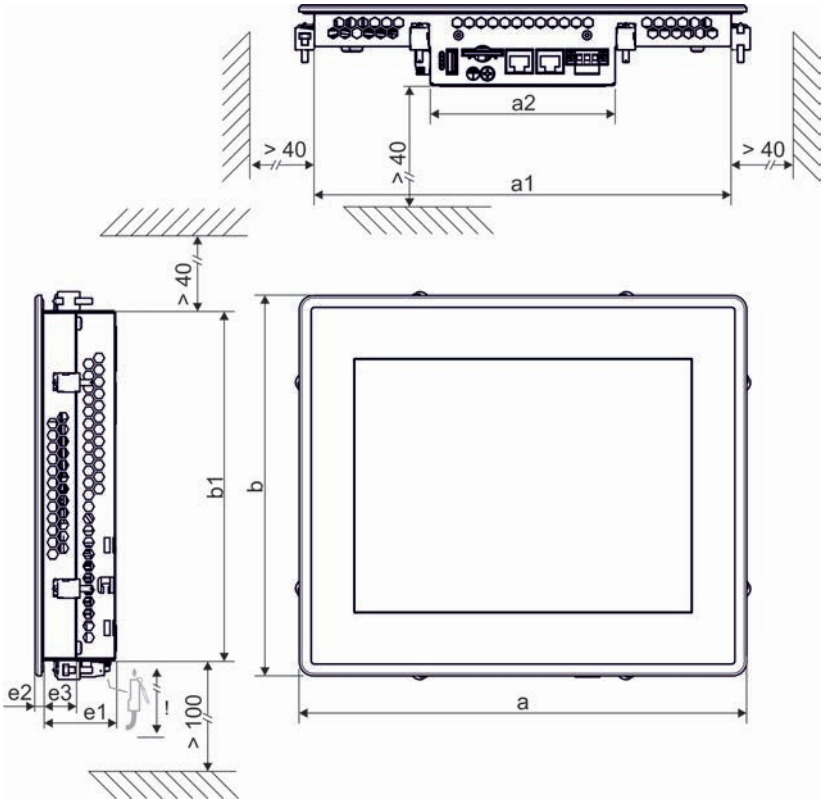


Display		Dimensions							
Screen diagonal									
		a	a_1	a_2	b	b_1	e_1	e_2	e_3
[cm]	["]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
10.9	4.3	130	117	117	104	91.0	42.0	3.00	
17.8	7.0	210	191	117	155	136	47.0	3.00	22.0
26.4	10.4	282	263	117	240	221	47.0	4.00	22.0



Connection plan

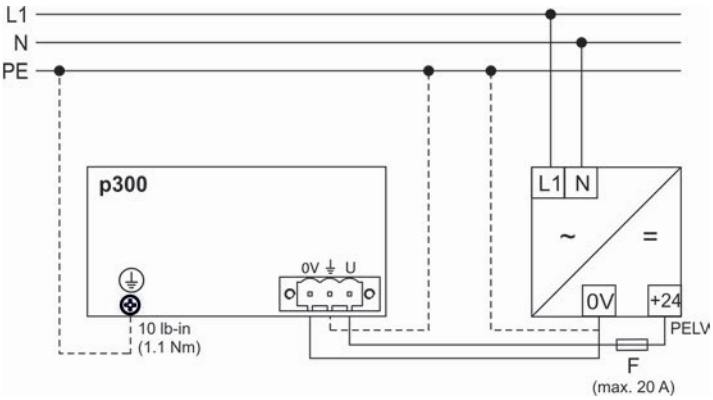

Mains connection

	Connection	Connection type	Cable type
	DC supply (24 V)	3-pole Combicon socket	Cable with Combicon-plug (cable cross-section max. 2.5 mm^2)
	PE connection	M4 (PH 2)	Separate earth conductor (1.2 ... 2.5 mm^2 with ring cable lug)



SD card and USB flash drive

SD cards and USB flash drives are available for data storage and data backups.

- ► A SD card is part of the scope of supply of the controller.
- ► SD card without Application Credit.

Mode		Features	Product key
Application Credit 0		• 512 MB	
USB flash drive		• 1 GB	EPCZEMUS4
		• 4 GB	EPCZEMUS6

24 V power supply unit

An external power supply unit is also available as an alternative for powering the controller's control electronics.



24 V power supply unit

Rated data

Product key			EZV2400-000
Rated voltage			
AC	$U_{N, AC}$	[V]	230
Rated mains current			
	$I_{N, AC}$	[A]	1.20
Output voltage			
	U_{out}	[V]	DC 22.5 ...28.5
Rated current			
	I_N	[A]	10.0
Dimensions			
	h x b x t	[mm]	130 x 85 x 125
Mass			
	m	[kg]	1.24



CAN bus connector

The connector is used to connect the CAN to inverters which are provided with a Sub-D connection for the CAN bus. An integrated CAN terminating resistor can be switched on/off. Internal spring terminals make the use of special mounting tools superfluous. The switch setting can be read from two sides.

Mode		Features	Product key
CAN bus connector: Node		• Sub-D, 90° • Screw terminals	EPM-T950
CAN bus connector: Terminating		• Sub-D, 90° • Screw terminals • Integrated terminating resistor	EPM-T951
CAN bus connector: Straight		• Sub-D, 180° • Screw terminals • Switchable terminating resistor	EPM-T952
CAN bus connector: Switch		• Sub-D, 90° • Spring-loaded terminal • Switchable terminating resistor	EWZ0046

Protection films

Mode		Features	Product key
17.8 cm (7 ")		• Protection of the surface against chemicals and mechanical damages (Packaging unit: 2 pieces)	EPCZMFD9
26.4 cm (10.4 ")			EPCZMFD4





I/O System 1000



I/O System 1000

Contents



General information		Product information	3.5 - 4
		Functions and features	3.5 - 6
		Compiling an I/O system	3.5 - 9
Technical data	General		3.5 - 10
		Standards and operating conditions	3.5 - 10
	Bus coupler		3.5 - 11
		Rated data	3.5 - 11
	Digital inputs		3.5 - 15
		Rated data	3.5 - 15
	Digital outputs		3.5 - 18
		Rated data	3.5 - 18
	RELAY		3.5 - 23
		Rated data	3.5 - 23
	Analog inputs		3.5 - 25
		Rated data	3.5 - 25
	Analog outputs		3.5 - 27
		Rated data	3.5 - 27
	Temperature measurement		3.5 - 28
		Rated data	3.5 - 28
		Measuring range	3.5 - 29
	Counter		3.5 - 30
		Rated data	3.5 - 30
	Technology modules		3.5 - 34
		Rated data	3.5 - 34
	Encoder evaluation		3.5 - 36
		Rated data	3.5 - 36
	Power supply modules		3.5 - 37
		Rated data	3.5 - 37
	Potential distribution modules		3.5 - 38
		Rated data	3.5 - 38
Accessories		Bracket for shield bus	3.5 - 39
		CAN bus connector	3.5 - 39
		Labelling strip	3.5 - 40



Product information

Complies with the strictest requirements
The availability of Ethernet-based bus systems lays the foundations for new automation concepts in the field of machine and systems engineering — the performance limits of established bus systems are then eliminated.

The L-force I/O system 1000 offers highly deterministic control of input and output modules, which also includes importing touch probe inputs, such as those required for synchronised movements in clocked production processes. A minimum internal cycle time, in combination with a time stamp, ensures that the I/O system 1000 itself meets the strictest speed requirements here. As such, it is also suitable for use in realtime-based architectures.

At the very first glance, the system impresses with its slimline design, as well as its clearly structured labelling and diagnostics concept. The I/O modules, which offer space for 8 connections, require just 12.5 mm of space on the conventional DIN rail.



User-oriented connection technique
The "internals" of the I/O system are also user friendly down to the last detail: the I/O compound module, consisting of terminal block with backplane bus connection and electronics protected against polarity reversal, has a modular structure. This allows a defective electronic module to changed when maintenance work needs to be performed without the wiring from the base module having to be disconnected. Service engineers know that this eliminates a common source of errors – incorrect wiring. The stepped design of the connection level also offers advantages, including tension spring connection technology and permanent wiring, which has proven itself on standard terminals for years. For the wiring itself, a simple screwdriver is sufficient. The simple and clear system of labelling and wiring for the new system also makes it a breeze to combine modules to create complete stations. The integrated backplane bus allows up to 64 modules to be connected in any desired sequence by simply plugging them in without the need for any wiring.

Compact structure
- Slimline design
- 8 connection points in a width of just 12.5 mm
- Tried-and-tested tension spring technology
- Stair-step shaped, space-saving wiring level
- Consistent separation of electronics and the wiring level
- Up to 64 modules can be connected
- Automatic connection via the backplane bus

Performance and robustness
- Gold-plated contacts guarantee a secure connection between the modules
- Fault-tolerant protocols secure maximum availability – even in the event of individual frame errors
- The large bandwidth of 48 MBits/s allows extremely fast response times without telegram overheads



Product information



Permanent wiring
- 2-part concept: base module and electronic module
- The electronics can be replaced during maintenance work without touching the wiring
- The item designation remains on the base module
- Codes prevent the incorrect module type from being connected




>Fast diagnostics
- Clearly structured labelling and diagnostics concept
- Bright LEDs are easy to see, even in poorly illuminated control cabinets
- One LED and one labelling field is clearly assigned to each channel



Easy connection
- Circuit diagram and connection plan printed directly on the module
- Side: detailed view
- Front: simplified view, also visible when the modules have been installed



Integrated shield connection
- Brackets are available as accessories for shield buses
- Direct installation of standard 10 x 3 busbars on the I/O station
- Shield connection possible with standard cable attachments and shield clamps



No tools required for installation
- Direct snap-in installation on the DIN rail
- Individual module or entire station can be fitted
- Complete blocks can subsequently be attached to the DIN rail
- The release levers remain open, allowing complete stations to be fitted and removed



Scalable supply concept
- The main supply is a fixed component of the bus coupler and supplies both the electronics and the I/O level
- Additional I/O supply available as an option, in the event that more than 10 A output current is required
- Additional I/O supply and electronic supply available as an option for extremely large station structures
- Each new I/O supply forms a separate potential area



Functions and features

Bus coupler module

Mode	Product key
Bus coupler	
CANopen	EPM-S110
PROFIBUS	EPM-S120
EtherCAT	EPM-S130
PROFINET	EPM-S140
DeviceNet	EPM-S150
Modbus TCP/IP	EPM-S160

► Scope of supply: bus coupler module, including power supply module

Input and output modules

Mode		Product key
Digital I/O	Abbreviated designation	
Inputs	DI 2, DC 24 V	EPM-S200
	DI 4, DC 24 V	EPM-S201
	DI 8, DC 24 V	EPM-S202
	DI 4, DC 24 V	EPM-S203
	DI 2, 2 µs, DC 24 V	EPM-S207
	DI 2, NPN, DC 24 V	EPM-S204
	DI 4, NPN, DC 24 V	EPM-S205
	DI 8, NPN, DC 24 V	EPM-S206
Outputs	DO 2, DC 24 V, 0.5 A	EPM-S300
	DO 4, DC 24 V, 0.5 A	EPM-S301
	DO 8, DC 24 V, 0.5 A	EPM-S302
	DO 2, DC 24 V, 2 A	EPM-S306
	DO 4, DC 24 V, 2 A	EPM-S309
	DO2, DC 24 V, 1 µs	EPM-S310
	DO 2, NPN, DC 24 V, 0.5 A	EPM-S303
	DO 4, NPN, DC 24 V, 0.5 A	EPM-S304
	DO 8, NPN, DC 24 V, 0.5 A	EPM-S305
RELAY	Relay 2, AC 230 V, 3 A	EPM-S308

► Scope of supply: I/O compound module (base module + electronic module)



Functions and features

Input and output modules

Mode		Product key
Analog I/O	Abbreviated designation	
Inputs	AI 2, 12-bit, 0 to 10 V	EPM-S400
	AI 4, 12-bit, 0 to 10 V	EPM-S401
	AI 2, 12-bit, 0/4 to 20 mA	EPM-S402
	AI 4, 12-bit, 0/4 to 20 mA	EPM-S403
	AI 2, 16-bit , -10 V to 10 V	EPM-S406
	AI 2, 16-bit, 0/4 to 20 mA	EPM-S408
Outputs	AO 2, 12-bit, 0 to 10 V	EPM-S500
	AO 4, 12-bit, 0 to 10 V	EPM-S501
	AO 2, 12-bit, 0/4 to 20 mA	EPM-S502
	AO 4, 12-bit, 0/4 to 20 mA	EPM-S503

► Scope of supply: I/O compound module (base module + electronic module)

Function modules

Mode		Product key
Product	Abbreviated designation	
Temperature measurement	AI 4, 16-bit, resistor	EPM-S404
	AI 2, 16-bit, Thermo	EPM-S405
Counter	Counter 1, DC 24 V	EPM-S600
	Counter 2, DC 24 V	EPM-S601
	Counter 1, DC 5 V	EPM-S602
	Counter 2, DC 24 V	EPM-S603
Encoder evaluation	SSI	EPM-S604
Technology modules	PWM	EPM-S620
	RS -232	EPM-S640
	RS -422/485	EPM-S650

► Scope of supply: I/O compound module (base module + electronic module)



Functions and features

Power supply modules

Mode		Product key
Product	Abbreviated designation	
Power supply modules	Power BC	EPM-S700
	Power DC 24 V	EPM-S701
	Power DC 24 V / 24 V	EPM-S702

► Scope of supply for EPM-S700: electronic module
Scope of supply for EPM-S701 to 702: I/O compound module
(base module + electronic module)

Potential distribution modules

Mode		Product key
Product	Abbreviated designation	
Potential distribution modules	Supply 8 x DC 24 V	EPM-S910
	Supply 8 x DC 0 V	EPM-S911
	Supply 4 x DC 24 V / 0 V	EPM-S912




Compiling an I/O system

The I/O system 1000 can be used to create a very individual, tailored system for the most diverse of applications. A total of up to 64 I/O modules can be integrated.

Operation with bus coupler

The bus couplers are used to connect the I/O system to a control via a bus system, in which a 24V power supply module, the so-called main power supply, is integrated.

Properties of the power supply unit:
- 5V electronic supply of the bus coupler itself, as well as the connected modules.
  Maximum output current 3 A
- 24V I/O supply for the inputs and outputs of the connected modules
  Maximum output current 7 A (10 A if no UL-conformity is required in the field of deployment)

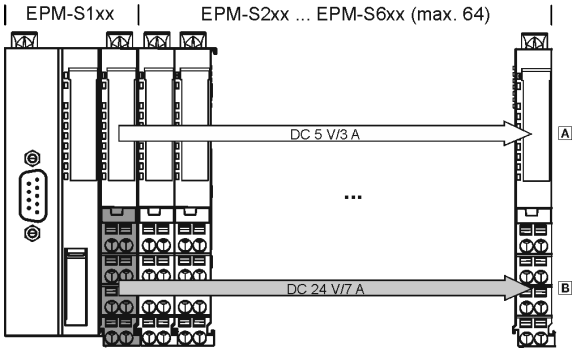


A: Electronics supply
B: I/O supply

Extension with power supply modules

In comprehensive systems, operation with just the DC supply via the bus coupler is sometimes not enough. In cases such as these, the I/O system can be extended with additional power supply modules.


Depending on which supply is insufficient, there are two different modules available:
- Power supply module EPM-S701
  Additional I/O supply (7 A)
- Power supply module EPM-S702
  Additional electronics supply (2 A) and I/O supply (4 A)

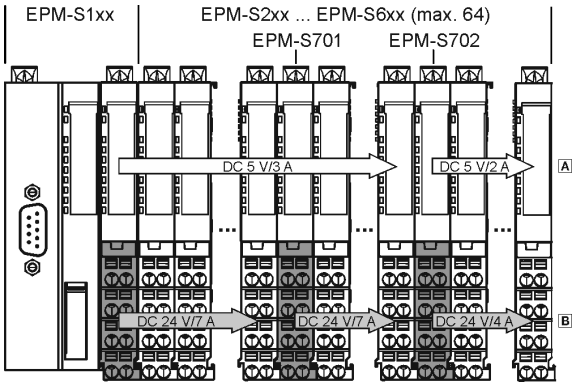

A: Electronics supply
B: I/O supply

External supply

The I/O system can also be used to supply 24V consumers. This is particularly useful when using active sensors which need to be connected using three-wire conductors. Power distribution modules EPM-S91□ which, depending on their design, provide24 V and 0 V for connection of external sensor technology are available for this.

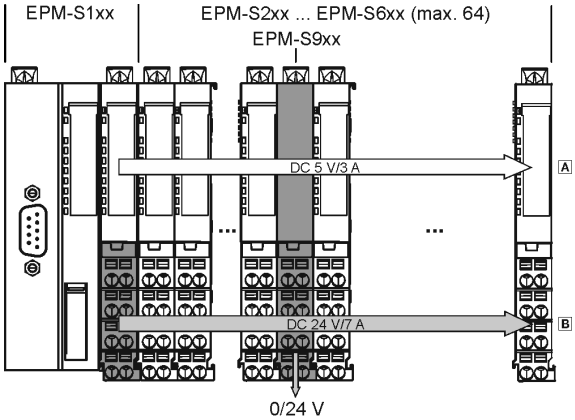

A: Electronics supply
B: I/O supply



Standards and operating conditions

Conformity			
CE			Low-Voltage Directive
			2006/95/EC
EAC			TP TC 020/2011 (TR CU 020/2011)
Approval			
UL 508C			Programmable Controller (File-No. E343358)
Degree of protection			
EN 60529			IP20
Climatic conditions			
Storage (EN 60068-2-14)			Temperature: -25 °C ... +70 °C
Transport (EN 60068-14)			Temperature: -25 °C ... +70 °C
Operation (EN 61131-2)			Temperature: 0 °C ... +60 °C
Site altitude			
Amsl	H_{max}	[m]	3000
Vibration resistance			
Vibration (EN 60068-2-6)			1 g
Mechanical shock (EN 60068-2-27)			15 g
Noise emission			
EN 61000-6-4			Limit class A
Noise immunity			
EN 61000-4-2			ESD: Severity 3
EN 61000-4-6			150 kHz ... 80 MHz, 10 V/m 80% AM (1 kHz)
EN 61000-4-3			80 kHz ... 1000 MHz, 10 V/m 80% AM (1 kHz)
EN 61000-4-4			Burst: Severity 3
EN 61000-4-5			Surge: Severity 3
Insulation resistance			
IEC 61131-2			Overvoltage category III Above 2000 m amsl overvoltage category II
Insulation voltage to reference earth/PE			
EN 61800-5-1	U_{AC}	[V]	500
Electrical isolation			
			500 V between I/O supply, electronic supply and fieldbus
Protective insulation of control circuits			
EN 61800-5-1			Safe mains isolation: double/reinforced insulation



Rated data








					
Product key					
			EPM-S110	EPM-S120	EPM-S130
Mode					
Bus coupler			CANopen	PROFIBUS	EtherCAT
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Max. input current					
	$I_{in,max}$	[A]	0.95	0.90	0.95
Output current					
Backplane bus	I_{out}	[A]	3		
I/O supply	I_{out}	[A]	7 [1)]		
Output voltage					
I/O supply	U_{out}	[V]	24		
Max. number of I/O modules					
			64		
Diagnostics					
Voltage supply			Supply OK / fuse defective		
Bus diagnostics			RUN-LED as per CANopen Ready for operation System error	Ready for operation System error	
Fusing					
			Via power supply module		
Communication					
Communication profile			CANopen, DS301 V4.02	PROFIBUS-DP-V0 PROFIBUS-DP-V1	EtherCAT (CoE)
Node					
			Slave		
Baud rate					
	b		10 kbps ... 1 Mbps	9.6 kbps ... 12 Mbps	100 Mbps
Number of bus nodes					
			127	With repeaters: 125 Without repeaters: 32	Max. 65535
Number of PDOs					
			16 Rx / 16 Tx	244 bytes	4 kbytes
Device description file					
			EDS	GSE	XML (Modular Device Profile MDP)

[1)] Can used up to 10 A without UL-approval.



Rated data

					
Product key					
			EPM-S110	EPM-S120	EPM-S130
Mode					
Bus coupler			CANopen	PROFIBUS	EtherCAT
Connection					
			Sub-D connection, 9-pin		RJ45, double
Dimensions					
	h x b x t	[mm]	109 x 48 x 76.5		
Mass					
	m	[kg]	0.16		

Product key	EPM-S110	EPM-S120	EPM-S130
			
			
			



Rated data








					
Product key					
			EPM-S140	EPM-S150	EPM-S160
Mode					
Bus coupler			PROFINET	DeviceNet	Modbus TCP/IP
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Max. input current					
	$I_{in,max}$	[A]	0.95		
Output current					
Backplane bus	I_{out}	[A]	3		
I/O supply	I_{out}	[A]	7 [1)]		
Output voltage					
I/O supply	U_{out}	[V]	24		
Max. number of I/O modules					
			64		
Diagnostics					
Voltage supply			Supply OK / fuse defective		
Bus diagnostics			Ready for operation System error		
Fusing					
			Via power supply module		
Communication					
Communication profile			PROFINET (RT/IRT)	DeviceNet	Modbus TCP/IP
Node					
			Device	Slave	
Baud rate					
	b		100 Mbps	500 kbps	100 Mbps
Number of bus nodes					
			255	64	
Number of PDOs					
			512 bytes	256 bytes	1 kbytes
Device description file					
			GSDML	EDS	

[1)] Can used up to 10 A without UL-approval.



Rated data

					
Product key					
			EPM-S140	EPM-S150	EPM-S160
Mode					
Bus coupler			PROFINET	DeviceNet	Modbus TCP/IP
Connection					
			RJ45, double	Pluggable terminal 5-pole	RJ45
Dimensions					
	h x b x t	[mm]	109 x 48 x 76.5		
Mass					
	m	[kg]	0.16		




Product key	EPM-S140	EPM-S150	EPM-S160
			
			
			



Rated data

► Positive switching

					
Product key					
			EPM-S200	EPM-S201	EPM-S202
Mode					
Abbreviated designation			DI 2, DC 24 V	DI 4, DC 24 V	DI 8, DC 24 V
Digital inputs					
Number			2	4	8
Input filter delay time		[ms]	3		
Connection system			1-/2-/3-wire technology	1-/2-wire technology	1-wire technology
Input level			IEC 61121-2 type 1 "0": 0 ... 5 V "1": 15 ... 28.8 V		
Wiring			PNP		
Input current					
Backplane bus	I_{in}	[mA]	55		60
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Communication					
Width in the input process image			8 bits 2 bits with bus coupler EPM-S110	8 bits 4 bits with bus coupler EPM-S110	8 bits
Parameter data (PROFIBUS/PROFINET)					
Diagnostics					
Module status			Ready for operation / error		
Signal status			1 LED per channel		
Time stamp					
Dimensions					
	h x b x t	[mm]	109 x 12.5 x 76.5		
Mass					
	m	[kg]	0.060		

Product key			
	EPM-S200	EPM-S201	EPM-S202
			





Rated data

► Positive switching



Product key				
			EPM-S203	EPM-S207
Mode				
Abbreviated designation			DI 4, DC 24 V	DI 2, 2 µs, DC 24 V
Digital inputs				
Number			4	2
Input filter delay time		[ms]	3	0.002 ... 3
Connection system			1-/2-/3-wire technology	
Input level			IEC 61121-2 type 1 "0": 0 ... 5 V "1": 15 ... 28.8 V	
Wiring			PNP	
Input current				
Backplane bus	I_{in}	[mA]	55	85
Rated voltage				
DC	$U_{N, DC}$	[V]	24	
Communication				
Width in the input process image			8 bits 4 bits with bus coupler EPM-S110	4 ... 60 bytes
Parameter data (PROFIBUS/PROFINET)				6 bytes
Diagnostics				
Module status			Ready for operation / error	
Signal status			1 LED per channel	
Time stamp				Yes
Dimensions				
	h x b x t	[mm]	109 x 12.5 x 76.5	
Mass				
	m	[kg]	0.060	




Product key		
	EPM-S203	EPM-S207
		



Rated data

► Negative switching

					
Product key					
			EPM-S204	EPM-S205	EPM-S206
Mode					
Abbreviated designation			DI 2, NPN, DC 24 V	DI 4, NPN, DC 24 V	DI 8, NPN, DC 24 V
Digital inputs					
Number			2	4	8
Input filter delay time		[ms]	3		
Connection system			1-/2-/3-wire technology	1-/2-wire technology	1-wire technology
Input level			IEC 61121-2 type 1 "0": 0 ... 5 V "1": 15 ... 28.8 V		
Wiring			NPN		
Input current					
Backplane bus	I_{in}	[mA]	60		65
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Communication					
Width in the input process image			8 bits 2 bits with bus coupler EPM-S110	8 bits 4 bits with bus coupler EPM-S110	8 bits
Diagnostics					
Module status			Ready for operation / error		
Signal status			1 LED per channel		
Time stamp					
Dimensions					
	h x b x t	[mm]	109 x 12.5 x 76.5		
Mass					
	m	[kg]	0.060		

Product key		
EPM-S204	EPM-S205	EPM-S206
		



Rated data

► Positive switching

					
Product key					
			EPM-S300	EPM-S301	EPM-S302
Mode					
Abbreviated designation			DO 2, DC 24 V, 0.5 A	DO 4, DC 24 V, 0.5 A	DO 8, DC 24 V, 0.5 A
Digital outputs					
Number			2	4	8
Output filter delay time	T	[µs]	30 ... 175		
Connection system			1-/2-/3-wire technology	1-/2-wire technology	1-wire technology
Wiring			PNP		
Input current					
Backplane bus	I_{in}	[mA]	55		65
I/O supply	I_{in}	[mA]	5 [1)]	10 [1)]	15 [1)]
Output current					
per channel	I_{out}	[A]	0.50		
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Switching frequency					
Ohmic load	f_{ch}	[Hz]	1000		
Inductive load	f_{ch}	[Hz]	0.50		
Lamp load	f_{ch}	[Hz]	10.0		
Communication					
Width in the input process image					
Width in the output process image			8 bits 2 bits with bus coupler EPM-S110	8 bits 4 bits with bus coupler EPM-S110	8 bits
Parameter data (PROFIBUS/PROFINET)					




[1)] + load current.



Rated data

► Positive switching

					
Product key					
			EPM-S300	EPM-S301	EPM-S302
Mode					
Abbreviated designation			DO 2, DC 24 V, 0.5 A	DO 4, DC 24 V, 0.5 A	DO 8, DC 24 V, 0.5 A
Diagnostics					
Module status			Ready for operation / error / overload		
Signal status			1 LED per channel		
Short-circuit strength					
			Electronic		
Dimensions					
	h x b x t	[mm]	109 x 12.5 x 76.5		
Mass					
	m	[kg]	0.060		

Product key				
		EPM-S300	EPM-S301	EPM-S302
				



Rated data

► Positive switching

					
Product key					
			EPM-S306	EPM-S309	EPM-S310
Mode					
Abbreviated designation			DO 2, DC 24 V, 2 A	DO 4, DC 24 V, 2 A	DO2, DC 24 V, 1 µs
Digital outputs					
Number			2	4	2
Output filter delay time	T	[µs]	30 ... 175		1
Connection system			1-/2-/3-wire technology	1-/2-wire technology	
Wiring			PNP		
Input current					
Backplane bus	I_{in}	[mA]	55		85
I/O supply	I_{in}	[mA]	5 [1]	10 [1]	14 [1]
Output current					
per channel	I_{out}	[A]	2.00 [2]		0.50
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Switching frequency					
Ohmic load	f_{ch}	[Hz]	1000		40000
Inductive load	f_{ch}	[Hz]	0.50		40000
Lamp load	f_{ch}	[Hz]	10.0		40000
Communication					
Width in the input process image					4 bytes
Width in the output process image			8 bits 2 bits with bus coupler EPM-S110	8 bits 4 bits with bus coupler EPM-S110	4 ... 60 bytes
Parameter data (PROFIBUS/PROFINET)					2 bytes




[1] + load current.
[2] On the EPM-S309, the max. total current is 4 A.



Rated data

► Positive switching

					
Product key					
			EPM-S306	EPM-S309	EPM-S310
Mode					
Abbreviated designation			DO 2, DC 24 V, 2 A	DO 4, DC 24 V, 2 A	DO2, DC 24 V, 1 µs
Diagnostics					
Module status			Ready for operation / error / overload		
Signal status			1 LED per channel		
Short-circuit strength					
			Electronic		
Dimensions					
	h x b x t	[mm]	109 x 12.5 x 76.5		
Mass					
	m	[kg]	0.060		

Product key			
	EPM-S306	EPM-S309	EPM-S310
			

3.5



Rated data

► Negative switching

					
Product key					
			EPM-S303	EPM-S304	EPM-S305
Mode					
Abbreviated designation			DO 2, NPN, DC 24 V, 0.5 A	DO 4, NPN, DC 24 V, 0.5 A	DO 8, NPN, DC 24 V, 0.5 A
Digital outputs					
Number			2	4	8
Output filter delay time	T	[µs]	30 ... 175		
Connection system			1-/2-/3-wire technology	1-/2-wire technology	1-wire technology
Wiring			NPN		
Input current					
Backplane bus	I_{in}	[mA]	60	65	70
I/O supply	I_{in}	[mA]	3 [1)]	5 [1)]	10 [1)]
Output current					
per channel	I_{out}	[A]	0.50		
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Switching frequency					
Ohmic load	f_{ch}	[Hz]	1000		
Inductive load	f_{ch}	[Hz]	0.50		
Lamp load	f_{ch}	[Hz]	10.0		
Communication					
Width in the output process image			8 bits 2 bits with bus coupler EPM-S110	8 bits 4 bits with bus coupler EPM-S110	8 bits




[1)] + load current.



Rated data

► Negative switching

					
Product key					
			EPM-S303	EPM-S304	EPM-S305
Mode					
Abbreviated designation			DO 2, NPN, DC 24 V, 0.5 A	DO 4, NPN, DC 24 V, 0.5 A	DO 8, NPN, DC 24 V, 0.5 A
Diagnostics					
Module status			Ready for operation / error / overload		
Signal status			1 LED per channel		
Short-circuit strength					
			Electronic		
Dimensions					
	h x b x t	[mm]	109 x 12.5 x 76.5		
Mass					
	m	[kg]	0.060		


Product key			
	EPM-S303	EPM-S304	EPM-S305
			

[1] + load current.



Rated data




			
Product key			
			EPM-S308
Mode			
Abbreviated designation			Relay 2, AC 230 V, 3 A
Relay outputs			
Number			2
Contact			NO contact
Input current			
Backplane bus	I_{in}	[mA]	55
Rated voltage			
DC	$U_{N, DC}$	[V]	30
AC	$U_{N, AC}$	[V]	230
Output current			
per channel	I_{out}	[A]	3.00
Switching frequency			
Ohmic load	f_{ch}	[Hz]	100
Communication			
Width in the output process image			8 bits 2 bits with bus coupler EPM-S110
Diagnostics			
Module status			Ready for operation / error
Signal status			1 LED per channel
Dimensions			
	h x b x t	[mm]	109 x 12.5 x 76.5
Mass			
	m	[kg]	0.060

Product key	
	EPM-S308
	



Rated data




					
Product key					
			EPM-S400	EPM-S401	EPM-S402
Mode					
Abbreviated designation			AI 2, 12-bit, 0 to 10 V	AI 4, 12-bit, 0 to 10 V	AI 2, 12-bit, 0/4 to 20 mA
Analog inputs					
Number			2	4	2
Voltage	U_{DC}	[V]	0 ...10		
Current	I	[mA]			0 ... 20 4 ... 20
Input filter limit frequency		[kHz]	1.00		
Resolution			12 bits		
Usage error limit		[%]	± 0.3		± 0.3 at 0 ... 20 mA ± 0.5 at 4 ... 20 mA
Basic error limit (at 25 °C)		[%]	± 0.2		± 0.2 at 0 ... 20 mA ± 0.3 at 4 ... 20 mA
A/D conversion time	T	[ms]	4 (all channels)	8 (all channels)	4 (all channels)
Input current					
Backplane bus	I_{in}	[mA]	70		
I/O supply	I_{in}	[mA]	15		
Rated voltage					
DC	$U_{N, DC}$	[V]			
Communication					
Width in the input process image			4 bytes	8 bytes	4 bytes
Parameter data (PROFIBUS/PROFINET)			6 bytes	8 bytes	6 bytes
Diagnostics					
Module status			Ready for operation / error		
Signal status			1 LED per channel		
Dimensions					
	h x b x t	[mm]	109 x 12.5 x 76.5		
Mass					
	m	[kg]	0.060		

Product key			
	EPM-S400	EPM-S401	EPM-S402
			



Rated data

					
Product key					
			EPM-S403	EPM-S406	EPM-S408
Mode					
Abbreviated designation			AI 4, 12-bit, 0/4 to 20 mA	AI 2, 16-bit , -10 V to 10 V	AI 2, 16-bit, 0/4 to 20 mA
Analog inputs					
Number			4	2	
Voltage	U_{DC}	[V]		-10 ... 10	
Current	I	[mA]	0 ... 20 4 ... 20		0 ... 20 4 ... 20
Input filter limit frequency		[kHz]	1.00		
Resolution			12 bits	16 bits	
Usage error limit		[%]	± 0.3 at 0 ... 20 mA ± 0.5 at 4 ... 20 mA	± 0.2	
Basic error limit (at 25 °C)		[%]	± 0.2 at 0 ... 20 mA ± 0.3 at 4 ... 20 mA	± 0.1	
A/D conversion time	T	[ms]	8 (all channels)	0.24 (all channels)	
Input current					
Backplane bus	I_{in}	[mA]	70	60	
I/O supply	I_{in}	[mA]	15	20	15
Rated voltage					
DC	$U_{N, DC}$	[V]			
Communication					
Width in the input process image			8 bytes	4 bytes	
Parameter data (PROFIBUS/PROFINET)			8 bytes	20 bytes	
Diagnostics					
Module status			Ready for operation / error		
Signal status			1 LED per channel		
Dimensions					
	h x b x t	[mm]	109 x 12.5 x 76.5		
Mass					
	m	[kg]	0.060		





Product key			
	EPM-S403	EPM-S406	EPM-S408
			



Rated data





Product key						
			EPM-S500	EPM-S501	EPM-S502	EPM-S503
Mode						
Abbreviated designation			AO 2, 12-bit, 0 to 10 V	AO 4, 12-bit, 0 to 10 V	AO 2, 12-bit, 0/4 to 20 mA	AO 4, 12-bit, 0/4 to 20 mA
Analog outputs						
Number			2	4	2	4
Voltage	U_{DC}	[V]	0 ... 10			
Current	I	[mA]			0/4 ... 20	
Resolution			12 bits			
Usage error limit		[%]	± 0.3		± 0.4 at 0 ... 20 mA ± 0.5 at 4 ... 20 mA	
Basic error limit (at 25 °C)		[%]	± 0.2		± 0.2 at 0 ... 20 mA ± 0.3 at 4 ... 20 mA	
D/A conversion time	T	[ms]	2 (all channels)			
Input current						
Backplane bus	I_{in}	[mA]	80			
I/O supply	I_{in}	[mA]	35		55	95
Rated voltage						
DC	$U_{N, DC}$	[V]				
Communication						
Width in the input process image			4 bytes	8 bytes	4 bytes	8 bytes
Parameter data (PROFIBUS/PROFINET)			8 bytes	10 bytes	8 bytes	10 bytes
Diagnostics						
Module status			Ready for operation / error			
Signal status			1 LED per channel (overload, short circuit, parameter entry error)			
Dimensions						
	h x b x t	[mm]	109 x 12.5 x 76.5			
Mass						
	m	[kg]	0.060			

Product key	EPM-S500	EPM-S501	EPM-S502	EPM-S503
				



Rated data

				
Product key				
			EPM-S404	EPM-S405
Mode				
Abbreviated designation			AI 4, 16-bit, resistor	AI 2, 16-bit, Thermo
Analog inputs				
Number			4 / (2)	2
Voltage	U_{DC}	[V]		
Resolution			16 bits	
Usage error limit		[%]	± 0.4	
		[K]		≥ ± 1.5 [1]
Basic error limit (at 25 °C)		[%]	± 0.2	
		[K]		≥ ± 1.0 [1]
A/D conversion time	T	[ms]		4 ... 325 [2]
Connection system			2-wire technology (3-/4-wire technology)	
Input current				
Backplane bus	I_{in}	[mA]	75	
I/O supply	I_{in}	[mA]	30	
Temperature sensor				
			PT100, PT1000 NI100, NI1000 Resistor	Thermocouple type: Thermocouple type: J, K, N, R, S, T, B, C, E, L
Communication				
Width in the input process image			8 bytes	4 bytes
Parameter data (PROFIBUS/PROFINET)			34 bytes	22 bytes
Diagnostics				
Module status			Ready for operation / error	
Signal status			1 LED per channel	
Dimensions				
	h x b x t	[mm]	109 x 12.5 x 76.5	
Mass				
	m	[kg]	0.060	

Product key		
	EPM-S404	EPM-S405
		

[1] Dependent on the sensor and interference frequency suppression.
[2] Dependent on the configuration and filter settings.



Measuring range

Product key			EPM-S404	EPM-S405
Sensor measuring range				
PT100	T	[°C]	-200 ... 850	
PT1000	T	[°C]	-200 ... 850	
NI100	T	[°C]	-60 ... 250	
NI1000	T	[°C]	-60 ... 250	
Resistor	R	[Ω]	60/600/3000/6000	
Thermocouple type B	T	[°C]		0 ... 1820
Thermocouple type C	T	[°C]		0 ... 2315
Thermocouple type E	T	[°C]		-270 ... 1000
Thermocouple type J	T	[°C]		-210 ... 1200
Thermocouple type K	T	[°C]		-270 ... 1372
Thermocouple type L	T	[°C]		-200 ... 900
Thermocouple type N	T	[°C]		-270 ... 1300
Thermocouple type R	T	[°C]		-50 ... 1769
Thermocouple type S	T	[°C]		-50 ... 1769
Thermocouple type T	T	[°C]		-270 ... 400
Voltage	U_{DC}	[mV]		-80 ... 80



Rated data



				
Product key				
			EPM-S600	EPM-S601
Mode				
Abbreviated designation			Counter 1, DC 24 V	Counter 2, DC 24 V
Digital inputs				
Number			1	2
Input level			HTL	
Input filter limit frequency		[kHz]	100	
Counter width		[Bit]	32	
Counting frequency		[kHz]	400	
Digital outputs				
Number			1	
Input current				
Backplane bus	I_{in}	[mA]	75	
I/O supply	I_{in}	[mA]	20 [1)]	15 [1)]
Output current				
per channel	I_{out}	[A]	0.50	
Rated voltage				
DC	$U_{N, DC}$	[V]	24	
Communication				
Width in the input process image			12 bytes	
Width in the output process image			10 bytes	12 bytes
Parameter data (PROFIBUS/PROFINET)			21 bytes	42 bytes

[1)] + encoder power consumption.



Rated data

				
Product key				
			EPM-S600	EPM-S601
Mode				
Abbreviated designation			Counter 1, DC 24 V	Counter 2, DC 24 V
Diagnostics				
Module status			Ready for operation / error	
Signal status			1 LED per counter input 1 LED per control input 1 LED per output	
Counter function				
			Read, set Latch function	Read, set
Alarm function				
			Yes	
Control inputs				
			Latch, reset, gate	
Dimensions				
	h x b x t	[mm]	109 x 12.5 x 76.5	
Mass				
	m	[kg]	0.060	

Product key		
	EPM-S600	EPM-S601
		



Rated data



				
Product key				
			EPM-S602	EPM-S603
Mode				
Abbreviated designation			Counter 1, DC 5 V	Counter 2, DC 24 V
Digital inputs				
Number			1	2
Input level			TTL	HTL
Input filter limit frequency		[kHz]	500	100
Counter width		[Bit]	32	
Counting frequency		[kHz]	2000	400
Digital outputs				
Number				
Input current				
Backplane bus	I_{in}	[mA]	75	100
I/O supply	I_{in}	[mA]	20 [1)]	15 [1)]
Output current				
per channel	I_{out}	[A]		
Rated voltage				
DC	$U_{N, DC}$	[V]		
Communication				
Width in the input process image			8 bytes	12 bytes
Width in the output process image			10 bytes	4 bytes
Parameter data (PROFIBUS/PROFINET)			22 bytes	8 bytes

[1)] + encoder power consumption.



Rated data

				
Product key				
			EPM-S602	EPM-S603
Mode				
Abbreviated designation			Counter 1, DC 5 V	Counter 2, DC 24 V
Diagnostics				
Module status			Ready for operation / error	
Signal status			1 LED per counter input 1 LED per control input 1 LED per output	
Counter function				
			Read, set	Read
Alarm function				
			Yes	
Control inputs				
			Reset	
Dimensions				
	h x b x t	[mm]	109 x 12.5 x 76.5	
Mass				
	m	[kg]	0.060	

Product key		
	EPM-S602	EPM-S603
		



Rated data




					
Product key					
			EPM-S620	EPM-S640	EPM-S650
Mode					
Abbreviated designation			PWM	RS -232	RS -422/485
Outputs					
Number			2		
Level				RS 232	RS 422 / 485
Delay time					
	T	[µs]	1		
Switching frequency					
	f_{ch}	[kHz]	20		
Input current					
Backplane bus	I_{in}	[mA]	85	100	
I/O supply	I_{in}	[mA]	15 [1)]	10 [1)]	
Output current					
per channel	I_{out}	[A]	0.50		
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Communication					
Hardware handshake				RTS/CTS	
Protocols				ASCII, STX/ETX, 3964 (R)	
Width in the input process image			4 bytes	max. 60 Byte	
Width in the output process image			12 bytes	max. 60 Byte	
Parameter data (PROFIBUS/PROFINET)			8 bytes	17 bytes	
Max. baud rate					
	b	[kBit/s]		115	

[1)] + load current.



Rated data


					
Product key					
			EPM-S620	EPM-S640	EPM-S650
Mode					
Abbreviated designation			PWM	RS -232	RS -422/485
Diagnostics					
Module status			Ready for operation / error		
Signal status			1 LED per channel	1 TxD LED, 1 RxD LED	
Short-circuit strength					
			Electronic		
Dimensions					
	h x b x t	[mm]	109 x 12.5 x 76.5		
Mass					
	m	[kg]	0.060		

Product key			
	EPM-S620	EPM-S640	EPM-S650
			



Rated data




			
Product key			
			EPM-S604
Mode			
Abbreviated designation			SSI
Inputs			
Number			1
Level			RS 422
Frequency	f_{in}	[kHz]	12 ... 6000
Input current			
Backplane bus	I_{in}	[mA]	70
I/O supply	I_{in}	[mA]	30
Rated voltage			
DC	$U_{N, DC}$	[V]	24
Communication			
Width in the input process image			6 bytes
Parameter data (PROFIBUS/PROFINET)			33 bytes
Diagnostics			
Module status			Ready for operation / error
Signal status			1 LED per encoder input
Evaluation function			3 comparisons, 2 limit values
Dimensions			
	h x b x t	[mm]	109 x 12.5 x 76.5
Mass			
	m	[kg]	0.060

Product key	
	EPM-S604
	



Rated data

					
Product key					
			EPM-S700	EPM-S701	EPM-S702
Mode					
Abbreviated designation			Power BC	Power DC 24 V	Power DC 24 V / 24 V
Rated voltage					
DC	$U_{N, DC}$	[V]	24		
Supply voltage					
Electronics	U_{in}	[V]	DC 24 (20.4 ... 28.8)		DC 24 (20.4 ... 28.8)
Output current					
Backplane bus	I_{out}	[A]			
I/O supply	I_{out}	[A]	7 [1]		4
Electrical isolation			500 V between I/O supply, electronic supply and fieldbus	not connected to the I/O supply voltage of the modules to the left	not connected to the I/O supply voltage of the modules to the left 500 V between I/O supply and electronic supply
Diagnostics					
Voltage supply			Supply OK / fuse defective		
Fusing					
			Internal		
Polarity reversal protection					
			Present		
Dimensions					
	h x b x t	[mm]	56 x 12.5 x 62	109 x 12.5 x 76.5	
Mass					
	m	[kg]	0.030	0.060	




Product key	EPM-S700	EPM-S701	EPM-S702
			

[1] Can used up to 10 A without UL-approval.



Rated data

					
Product key					
			EPM-S910	EPM-S911	EPM-S912
Mode					
Abbreviated designation			Supply 8 x DC 24 V	Supply 8 x DC 0 V	Supply 4 x DC 24 V / 0 V
Rated voltage					
DC	$U_{N, DC}$	[V]	24	0	0 24
Rated current					
	I_N	[A]	10.0		
Dimensions					
	h x b x t	[mm]	109 x 12.5 x 53		
Mass					
	m	[kg]	0.050		

Product key	EPM-S910	EPM-S911	EPM-S912
			



Bracket for shield bus

Standard 10 x 3 busbars can be connected directly to the I/O system using the bracket for shield buses. The shield connection with standard cable attachments and shield clamps can be used.

Mode		Features	Product key
Bracket for shield bus		• Installation of standard metal rails for shield connections directly on the module (VPE 10 pieces)	EPM-S900


CAN bus connector

The connector is used to connect the CAN to inverters which are provided with a Sub-D connection for the CAN bus. An integrated CAN terminating resistor can be switched on/off. Internal spring terminals make the use of special mounting tools superfluous. The switch setting can be read from two sides.


Mode		Features	Product key
CAN bus connector: Node		• Sub-D, 90° • Screw terminals	EPM-T950
CAN bus connector: Terminating		• Sub-D, 90° • Screw terminals • Integrated terminating resistor	EPM-T951
CAN bus connector: Straight		• Sub-D, 180° • Screw terminals • Switchable terminating resistor	EPM-T952
CAN bus connector: Switch		• Sub-D, 90° • Spring-loaded terminal • Switchable terminating resistor	EWZ0046



Labelling strip

Mode		Features	Product key
Labelling strip		• DIN A4 white, precut Material: PET (water and oil resistant) Printing using a standard laser printer 102 labelling strips per sheet (VPE 10 sheets)	EPM-S990

Monitor Panel

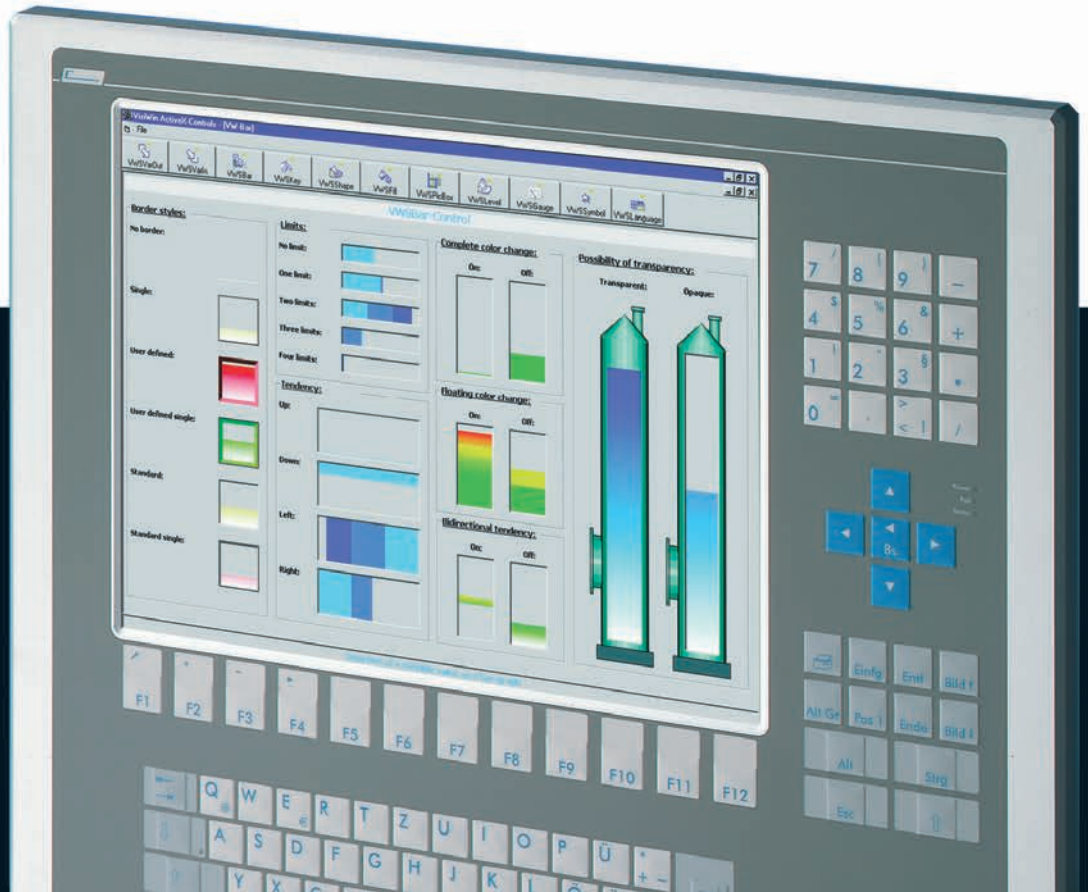

Monitor Panel




Contents

General information		Product key	3.6 - 4
		Product information	3.6 - 6
Technical data	General		3.6 - 7
		Standards and operating conditions	3.6 - 7
	Embedded Line		3.6 - 8
		Rated data	3.6 - 8
	Command Station		3.6 - 11
		Rated data	3.6 - 11
Accessories		DVI/USB extender	3.6 - 13
		Transmission cable	3.6 - 13



Product key

Embedded Line

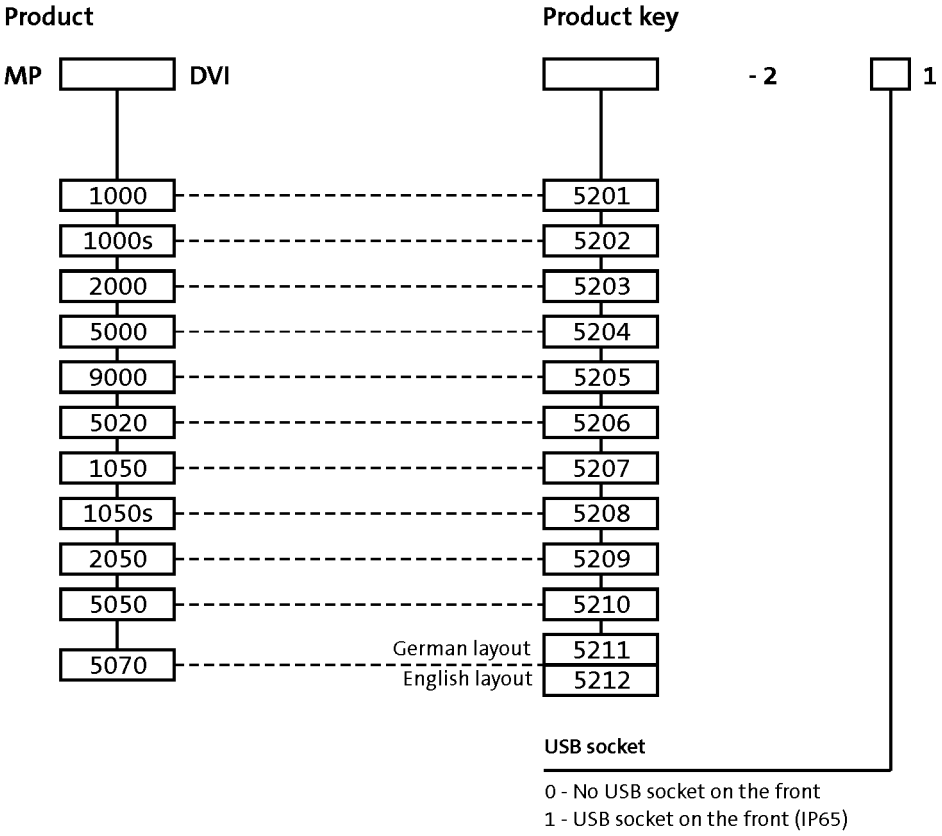



MP 5020 DVI monitor panel



Product key

Command Station

Product

CS [ ] DVI

- 5000
- 9000
- 5010
- 5050
- 5070

Product key

[ ] - 2 [ ] [ ] [ ]

- 6300
- 6301
- 6302
- 6303
- 6304 German layout
- 6305 English layout

USB socket

0 - No USB socket on the front
1 - USB socket on the front (IP65)

Mounting frame (bottom)

0 - Without cable gland
1 -Double universal cable gland (KDL-2) [1]
3 - USB port in mounting frame IP65

Fixing adapter

0 - VESA 100
1 - VESA, closed
2 - Rittal CP-L

[1] Scope of supply including 1 x blind grommet.



CS 5000 DVI monitor panel (with attachment keyboard)




Product information

Embedded Line

Embedded Line monitor panels are designed to be installed in control cabinets, machine enclosures and other mounting cutouts. All Embedded Line devices feature assembly fixtures to allow easy installation and secure sealing (IP65) even in harsh industrial environments.

- Operator terminal for external industrial PCs
- Display unit (TFT) for distributed IPC solutions
- Touch Screen or keyboard operation
- Digital DVI video interface
- Data transfer via DVI/USB extender up to 35 m

Cable lengths
- Standard: 2 m DVI/USB included in the scope of supply
- Optional: 5 m DVI/USB passive, max. 35 m DVI/USB active with DVI/USB extender

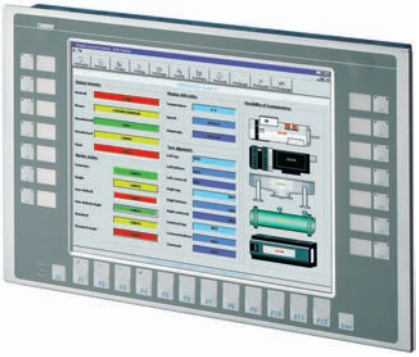

MP 5020 DVI monitor panel

Command Station

The Command Station (CS) monitor panels are protected against dust and splash water. The flat housing is machined from solid aluminium with a stainless steel mounting frame at the rear for support arm mounting or direct wall mounting.

For the flexible implementation of individual operating concepts the system offers numerous options and extension consoles, including touchscreen, function and alphanumeric keyboards, operator consoles with switching elements or MF2 keyboards in various designs.

- Operator terminals for external industrial PCs
- Display unit (TFT) for distributed IPC solutions
- Touch Screen or keyboard operation
- Digital DVI/video interface
- Data transfer via DVI/USB extender up to 35 m

Cable lengths
- Standard: 5 m DVI/USB passive, max. 35 m DVI/USB active with DVI/USB extender

The detachable front module (aluminium) with PC unit combined with a fixed mounting frame (stainless steel) makes for simple installation and wiring and allows easy access for maintenance when required.



CS 5000 DVI monitor panel (with attachment keyboard)



Standards and operating conditions

Design			Embedded Line	Command Station
Conformity				
CE			Low-Voltage Directive	
			2006/95/EC	
EAC			TP TC 020/2011 (TR CU 020/2011)	
Approval				
UL 508C			Programmable Controller (File-No. E236341)	
Degree of protection				
EN 60529			IP65 (front) IP20 (back)	IP65
Climatic conditions				
Storage (EN 60068-2-14)			Temperature: -10 °C ... +60 °C	
Transport (EN 60068-14)			Temperature: -10 °C ... +60 °C Temperature: -10 °C ... +50 °C (in plants according to UL)	
Operation (EN 61131-2)			Temperature: +5 °C ... +50 °C Temperature: +5 °C ... +40 °C (in plants according to UL)	Temperature: +5 °C ... +45 °C
Site altitude				
Amsl	H_{max}	[m]	3000	
Noise emission				
EN 61000-6-4			Limit class A	
Noise immunity				
EN 61000-4-2			ESD: Severity 3	
EN 61000-4-6			150 kHz ... 80 MHz, 10 V/m 80% AM (1 kHz)	
EN 61000-4-3			80 kHz ... 1000 MHz, 10 V/m 80% AM (1 kHz)	
EN 61000-4-4			Burst: Severity 3	
EN 61000-4-5				



Rated data

								
Mode								
Monitor Panel				MP 1000 DVI	MP 1000s DVI	MP 2000 DVI	MP 5000 DVI	MP 9000 DVI
Display								
Screen diagonal			[cm]	26.4		30.5	38.1	48.3
			["]	10.4		12.1	15.0	19.0
Design				color				
Type				Graphics				
Display				TFT				
Number of colours				64 k				
Resolution			[Pixel]	640 x 480	800 x 600		1024 x 768	1280 x 1024
Brightness			[cd/m²]	400		300	250	300
Contrast				1 : 300	1 : 500	1 : 200	1 : 550	1 : 700
Operator control								
Screen				Resistive touchscreen				
Keyboard								
MF2 keyboard layout								
USB socket								
				Optional: with USB socket on front				
Supply voltage								
DC	U_{in}	± 25 %	[V]	24				
Max. current consumption								
	I_{max}		[A]	0.40		0.70	0.90	1.40
Dimensions								
	h x b x t		[mm]	240 x 325 x 65		300 x 390 x 65	325 x 450 x 65	400 x 490 x 75
Mass								
	m		[kg]	4.20		5.40	6.20	10.2

Monitor Panel

Technical data - Embedded Line DVI



Rated data

						
Mode						
Monitor Panel				MP 5020 DVI	MP 1050 DVI	MP 1050s DVI
Display						
Screen diagonal			[cm]	38.1	26.4	
			["]	15.0	10.4	
Design				color		
Type				Graphics		
Display				TFT		
Number of colours				64 k		
Resolution			[Pixel]	1024 x 768	640 x 480	800 x 600
Brightness			[cd/m²]	250	400	
Contrast				1 : 550	1 : 300	1 : 500
Operator control						
Screen				Resistive touchscreen		
Keyboard				Special keys F keys	Num keys Alpha keys F keys	
MF2 keyboard layout						
USB socket						
				Optional: with USB socket on front		
Supply voltage						
DC	U_{in}	± 25 %	[V]	24		
Max. current consumption						
	I_{max}		[A]	0.90	0.40	
Dimensions						
	h x b x t		[mm]	310 x 483 x 65	240 x 365 x 65	
Mass						
	m		[kg]	6.40	4.60	



Rated data

						
Mode						
Monitor Panel				MP 2050 DVI	MP 5050 DVI	MP 5070 DVI
Display						
Screen diagonal			[cm]	30.5	38.1	
			["]	12.1	15.0	
Design				color		
Type				Graphics		
Display				TFT		
Number of colours				64 k		
Resolution			[Pixel]	800 x 600	1024 x 768	
Brightness			[cd/m²]	300	250	
Contrast				1 : 200	1 : 550	
Operator control						
Screen				Resistive touchscreen		
Keyboard				Num keys Alpha keys F keys		Num keys Special keys F keys MF2 keyboard
MF2 keyboard layout						deutsch englisch
USB socket						
				Optional: with USB socket on front		
Supply voltage						
DC	U_{in}	± 25 %	[V]	24		
Max. current consumption						
	I_{max}		[A]	0.70	0.90	
Dimensions						
	h x b x t		[mm]	310 x 425 x 65	310 x 483 x 65	399 x 483 x 65
Mass						
	m		[kg]	5.60	6.40	7.20



Rated data

						
Mode						
Monitor Panel				CS 5000 DVI	CS 9000 DVI	CS 5010 DVI
Display						
Screen diagonal			[cm]	38.1	48.3	38.1
			["]	15.0	19.0	15.0
Design				color		
Type				Graphics		
Display				TFT		
Number of colours				64 k		
Resolution			[Pixel]	1024 x 768	1280 x 1024	1024 x 768
Brightness			[cd/m²]	250	300	250
Contrast				1 : 550	1 : 700	1 : 550
Operator control						
Screen				Resistive touchscreen		
Keyboard						Mounting field with 7 control elements and emergency switching off
MF2 keyboard layout						
USB socket						
				Optional: with USB socket on front		
Mounting frame (bottom)						
				Without cable gland Universal double cable entry point (KDL-2) USB port in mounting frame IP65		
Fixing adapter						
				VESA 100 VESA, closed Rittal CP-L		
Supply voltage						
DC	U_{in}	± 25 %	[V]	24		
Max. current consumption						
	I_{max}		[A]	0.90	1.40	0.90
Dimensions						
	h x b x t		[mm]	355 x 466 x 68	410 x 506 x 78	430 x 466 x 78
Mass						
	m		[kg]	10.0	12.0	10.0



Rated data

					
Mode					
Monitor Panel				CS 5050 DVI	CS 5070 DVI
Display					
Screen diagonal			[cm]	38.1	
			["]	15.0	
Design				color	
Type				Graphics	
Display				TFT	
Number of colours				64 k	
Resolution			[Pixel]	1024 x 768	
Brightness			[cd/m²]	250	
Contrast				1 : 550	
Operator control					
Screen				Resistive touchscreen	
Keyboard				Num keys Alpha keys F keys	Num keys Special keys F keys MF2 keyboard
MF2 keyboard layout					deutsch englisch
USB socket					
				Optional: with USB socket on front	
Mounting frame (bottom)					
				Without cable gland Universal double cable entry point (KDL-2) USB port in mounting frame IP65	
Fixing adapter					
				VESA 100 VESA, closed Rittal CP-L	
Supply voltage					
DC	U_{in}	± 25 %	[V]	24	
Max. current consumption					
	I_{max}		[A]	0.90	
Dimensions					
	h x b x t		[mm]	330 x 500 x 68	410 x 499 x 78
Mass					
	m		[kg]	10.0	



DVI/USB extender

When using remote operation concepts, the DVI/USB extender makes it possible to extend the distance between controller and control panel to up to 35 m. All signals — digital real-time image information, USB peripherals, mouse and keyboard — are transmitted via a Twin-LAN cable (2 x CAT-7). The voltage supply for the panel (DC 24 V) also uses this cable connection.

- Transmission of DVI and USB (1.1) signals
- Physical transmission distance: max. 35 m plus max. 5 m from the controller to the TX module
- Transmission of supply voltage
- Easy installation: plug and play, no software drivers required
- Easy mounting: TX module fitted on mounting plate, RX module attached to the back of the monitor panel.

The system is made up of one TX transmitter module, which is fitted near the controller, and one RX receiver module, which is mounted directly to the back of the monitor panel.



Mode	Features	Product key
DVI/USB extender	• TX transmitter module: - control cabinet mounting using keyhole attachment - Dimensions: 52 x 140 x 101.5 mm (W x H x D) - Mounting area: 52 x 190 mm (W x H) - Voltage supply: DC 24 V - 2m PC connection cable included PC (max. 5 m usable) • RX receiver module: - Dimensions: 27.5 x 172.5 x 100 mm (W x H x D) - Voltage supply: via transmitter module - Supply: 24 V for monitor - Connection cable: 0.4m	EPCZEBED

Transmission cable

Mode	Features	Product key
Transmission cable	• TwinLAN 10 m	EYC0045A0100R05T05
	• TwinLAN 15 m	EYC0045A0150R05T05
	• TwinLAN 20 m	EYC0045A0200R05T05
	• TwinLAN 25 m	EYC0045A0250R05T05
	• TwinLAN 30 m	EYC0045A0300R05T05
	• TwinLAN 35 m	EYC0045A0350R05T05
	• DVI + USB cable 5 m	EYC0000A0350X00008







Inverters

Servo-Inverter i700

5 to 64 A



Servo-Inverter i700



Contents

General information		Product key	4.6 - 4
		Equipment	4.6 - 5
		List of abbreviations	4.6 - 6
		Generation Easy for multi-axis applications	4.6 - 7
		Functions and features	4.6 - 8
		Operating modes	4.6 - 9
		Dimensioning of a multi-axis system	4.6 - 10
Technical data		Standards and operating conditions	4.6 - 13
		Rated data for single axes	4.6 - 14
		Rated data for double axes	4.6 - 16
		Rated data for power supply modules	4.6 - 18
		"Cold plate" design	4.6 - 20
		Push-through technique design	4.6 - 22
Interfaces		Mains connection	4.6 - 25
		Motor connection	4.6 - 26
		Connection diagrams	4.6 - 28
		Control connections	4.6 - 30
		Safety system (STO)	4.6 - 32
		EtherCAT® communication	4.6 - 33
Accessories	Power supply modules	Brake resistors for power supply modules	4.6 - 34
		Mains chokes for power supply modules	4.6 - 35
		Interference suppression of power supply modules	4.6 - 36
		24 V power supply unit	4.6 - 38
		Installation sets for Servo-Inverter i700	4.6 - 38



Product key

E70A	C	M	S	E	005	4	S	A	1	ET	R

Design
C – Control cabinet inverter

Type
M – Single axis or double axis
P – Supply module

Version
S – Standard

Mounting type
E – Installation
D – Push–trough technique
C – Cold plate technique

Max. short-time output current

005 – 5.0 A	032 – 32.0 A
010 – 10.0 A	048 – 48.0 A
020 – 20.0 A	064 – 64.0 A

Voltage class
4 – 400/480 V, 3/PE AC

Ambient conditions
S – Standard
V – Rough

Drive-based safety
A – With drive-based safety (STO)


Motor outputs
1 – Single axis
2 – Double axis

Communication
ET – EtherCAT

Encoder input
R – Resolver
E – Encoder/Absolute value encoder



Equipment

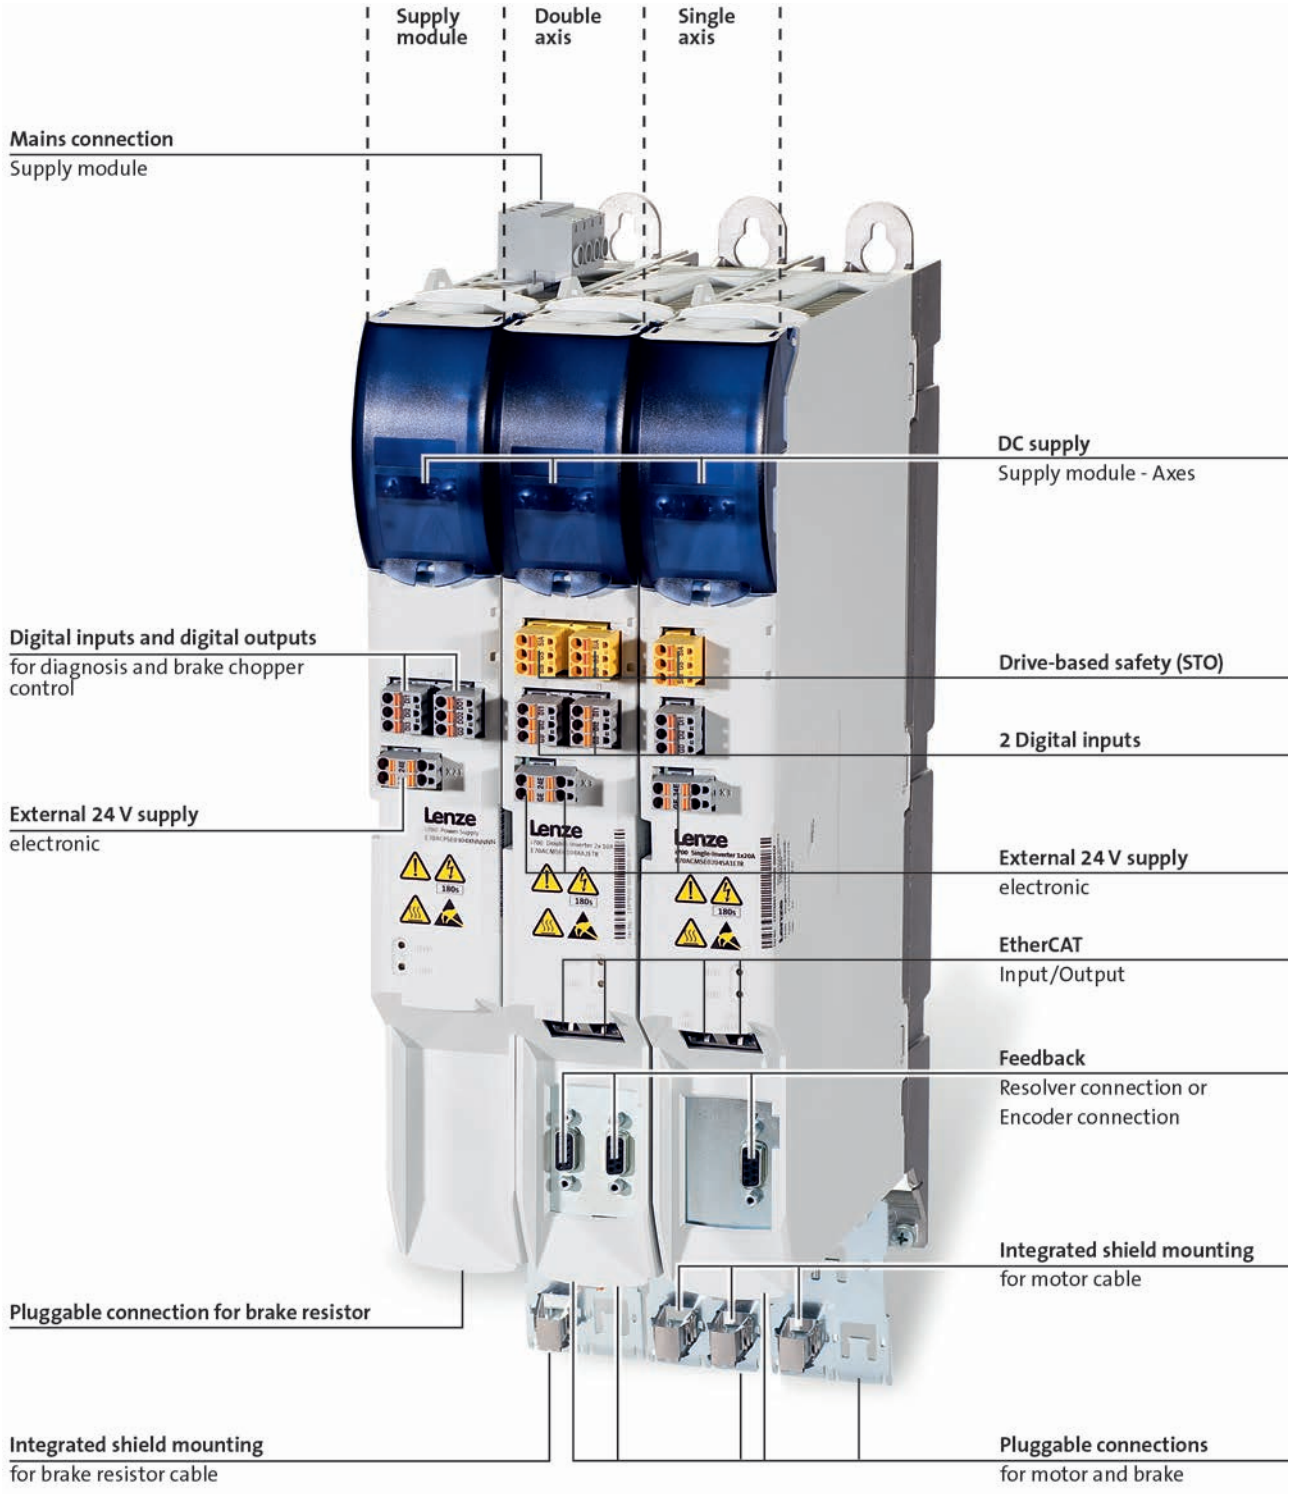
Supply module
Double axis
Single axis
Mains connection
Supply module
DC supply
Supply module - Axes
Digital inputs and digital outputs
for diagnosis and brake chopper control
Drive-based safety (STO)
2 Digital inputs
External 24 V supply
electronic
External 24 V supply
electronic
EtherCAT
Input/Output
Feedback
Resolver connection or
Encoder connection
Integrated shield mounting
for motor cable
Pluggable connection for brake resistor
Integrated shield mounting
for brake resistor cable
Pluggable connections
for motor and brake



List of abbreviations

b	[mm]	Dimensions
C_{th}	[KWs]	Thermal capacity
f_{ch}	[kHz]	Rated switching frequency
h	[mm]	Dimensions
$I_{N, out}$	[A]	Rated output current
$I_{N, AC}$	[A]	Rated mains current
m	[kg]	Mass
n_{max}	[r/min]	Max. speed
P	[kW]	Typical motor power
P_V	[kW]	Power loss
P_N	[kW]	Rated power
R_N	[Ω]	Rated resistance
t	[mm]	Dimensions
U_{AC}	[V]	Mains voltage
U_{DC}	[V]	DC supply
$U_{N, AC}$	[V]	Rated voltage
U_{out}	[V]	Max. output voltage

ASM	Asynchronous motor
DIAG	Slot for diagnostic adapter
DIN	Deutsches Institut für Normung e.V.
EN	European standard
EN 60529	Degrees of protection provided by enclosures (IP code)
EN 60721-3	Classification of environmental conditions; Part 3: Classes of environmental parameters and their limit values
EN 61800-3	Electrical variable speed drives Part 3: EMC requirements including special test methods
IEC	International Electrotechnical Commission
IEC 61508	Functional safety of electrical/electronic/programmable electronic safety-related systems
IM	International Mounting Code
IP	International Protection Code
MCI	Slot for communication module (module communication interface)
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)



Generation Easy for multi-axis applications

The innovative Servo-Inverter i700 for central motion control is characterised by its compact and highly flexible design. Dual axes keep the drive size to a minimum, dynamic motor control makes it suitable for use in a wide range of applications. Drive integration, commissioning and maintenance have been substantially simplified thanks to its installation concept and easy engineering.

Highlights:
- Easy to use: from installation to service
- Compact: both in size and connection system
- Flexible: motor control for synchronous and asynchronous motors
- High performance, e. g. with real-time EtherCAT® bus system

i700 – in use

Powerful central motion control of demanding machine tasks is best achieved with our Controller-based Automation. The Servo-Inverter i700 for multiaxis application can drive all centrally controlled motors in your machine module – from three-phase AC motor to servo motor.

i700 features:
- Multi-axis system
- Single and double axes
- Power supply modules
- DC-bus connection via busbar system
- Pluggable connection system
- Automatic parameter/firmware download via the control system
- Motor control:
  -Servo with field weakening and torque pre-control
  -V/f control for standard asynchronous motors without encoder
- Scalable safety functions
- 3 cooling methods: standard panel-mount, cold plate technique, push-through technique





Functions and features

The Servo-Inverter i700 can be directly implemented into the Controller-based Automation applications via the integrated EtherCAT® interface. The interaction of the different Lenze controllers provide for a high number of sophisticated L-force Motion applications.

The speed and position control modes are directly executed in the servo inverter which ensures very short cycle times (0.25 ms). The selection of the right control mode for the application is determined via the application in the Controller. The "Controller-based Automation" chapter summarises which controller optimally solves the individual applications together with the i700.

Mode	
	Servo-Inverter i700
Conrol types, motor control	
Field-oriented servo control (SC)	For synchronous servo motors, asynchronous servo motors and three-phase asynchronous motors
V/f control (VFCplus)	For three-phase AC motors and asynchronous servo motor (linear or square-law)
Basic functions	
	Brake management for brake control with low rate of wear PID controller
Operating modes to CiA 402	Velocity mode (VL) - non-cyclic velocity setpoint Cyclic synchronous position (csp) - cyclic position setpoint Cyclic synchronous velocity (csv) - cyclic velocity setpoint Cyclic synchronous torque (cst) - cyclic torque setpoint
Overload behaviour	
	200% maximum current (with regard to 4kHz rated current)
Functions with FAST Application Software	
	Comprehensive library of function and technology modules e.g. for positioning, cam functions, electrical shaft etc.
Monitoring and protective measures	
	Overload Short circuit Earth fault Overvoltage Undervoltage DC-bus voltage Motor phase failure Overcurrent I² x t-Motor monitoring Overtemperature Motor overtemperature Brake chopper, brake resistance Motor stalling
Diagnostics	
	Axis modules: Error codes to CiA 402 Power supply modules: Status message via 2 digital outputs Oscilloscope functions
Status display	2 LEDs
Braking operation	
Brake chopper	Integrated in power supply module
Brake resistor	External
Mounting conditions	
Mounting type	Installation Cold plate technique Push-through technique
Mounting place	In the control cabinet
Mounting position	Vertical
Free spaces	At the top: minimum 90 mm Side–by–side mounting without any clearance At the bottom: minimum 70 mm



Operating modes

Overcurrent operation


Axis modules and power supply modules

Power supply modules and axis modules can be operated with higher currents beyond the rated current if this overcurrent is only active for a limited operating time. Within the efficiency cycles, the overcurrent can flow for a certain period of time if afterwards an accordingly long recovery phase takes place afterwards. Two efficiency cycles of 15 s [1] in red and 180 s [2] in blue are defined.

- 15-s cycle
  - 3 s (T_1) load period with peak current [A] (200 %)
  - 12 s (T_2) recovery time with limited current [C] (75 %)
- 180-s cycle
  - 60 s (T_3) load period with peak current [B] (150 %)
  - 120 s (T_4) recovery time with limited current C] (75 %)

A load period with peak current must be followed by a recovery time. In the recovery time, the current must not exceed the given value.

Overcurrent operation

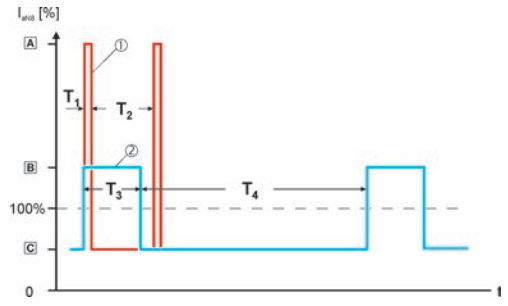

► From a maximum device current of 32 A, the following restriction applies:
With field frequencies lower than 5 Hz, the cycle time of the short time behaviour is reduced from 15 s to 3 s.




Dimensioning of a multi-axis system

Drive dimensioning of multi-axis systems with Servo-Inverters i700 can be easily carried out using the DSD (Drive Solution Designer) engineering tool. This tool can be downloaded from the Lenze homepage (http://www.lenze.com/download/software-downloads). It considers various, frequently recurring applications, the ambient conditions and the entire mechatronic system and their operating mode as for instance coordinated or uncoordinated multi-axis operation with energy exchange in the DC-bus system. It provides comprehensible dimensioning protocols and an Energy Performance Certificate for the axes and for the multi-axis system. The Energy Performance Certificate clearly displays the energy efficiency of all drive components under the given operation modes and provides potential for energy optimisations for entire plants.

Functions and features

Mode	Engineering Tool DSD
Applications	Comprehensive applications as for instance linear and rotating drives, positioning-, wheel, hoist and synchronous drives, winders, pumps, fans, ...
Components	Inverter Motors (brake, feedback) Geared motors Power supply modules
Check of components and drive system	Monitoring functions of the inverters Maximum limits of the components Product data in the applications Consideration and check of the entire drive system Limit loads (electrical/mechanical) M-n characteristic fields and system checks Possible combinations of the drive components Losses and energy efficiency
Optimisation and evaluation	Energy consumption of the components and of the application Energy exchange in multi-axis applications Representation of working points, e.g. as characteristic
Presentation of the result	Evaluation of the dimensioning Representation of energy consumption Logging of dimensioning Creating CAD data
Basic functions	Metric and imperial unit systems Intuitive interfaces with simple dialogs Comprehensive online help with physical basics and overviews Fast and easy drive dimensioning and product configuration Editor for the motion sequence Creating alternative solutions with comparison operations

Dimensioning of a multi-axis system

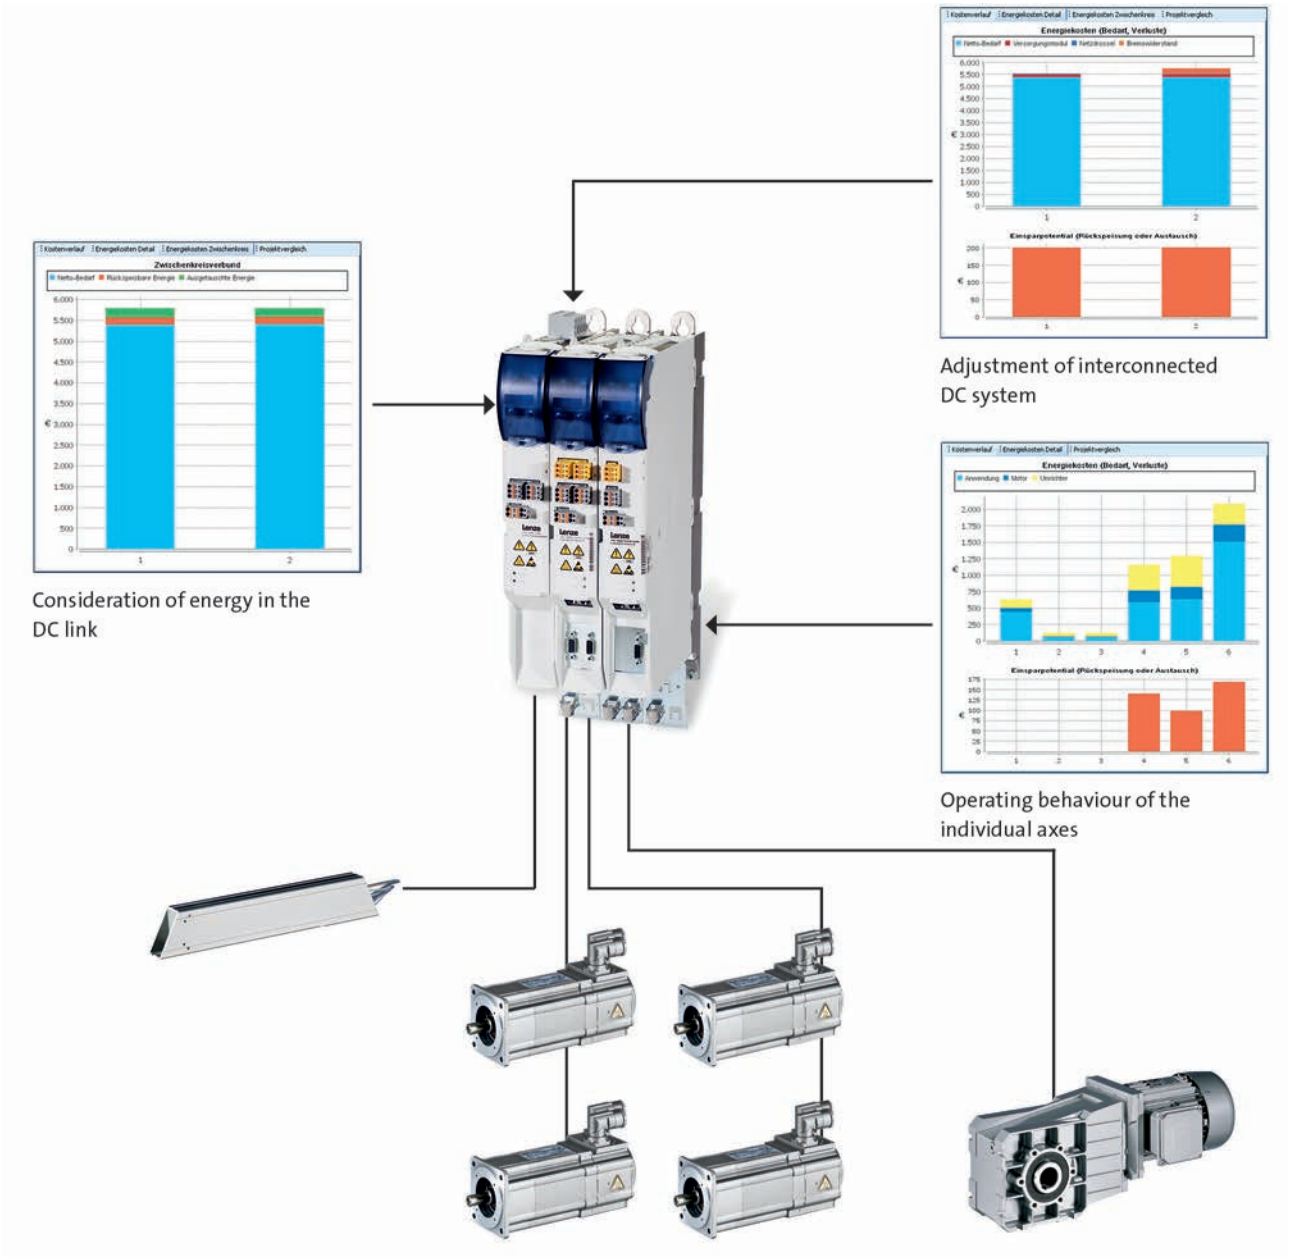





Standards and operating conditions

Mode			
Product			Servo-Inverter i700
Conformity			
CE			Low-Voltage Directive
			2006/95/EC
EAC			TP TC 004/2011 (TR CU 004/2011) TP TC 020/2011 (TR CU 020/2011)
Approval			
UL 508C			Power Conversion Equipment (file no. E132659)
CSA			CSA 22.2 No. 14
Certification			
			RoHs
Degree of protection			
EN 60529			IP20
NEMA 250			Type 1
Climatic conditions			
Storage (EN 60721-3-1)			1K3 (temperature: -25 °C ... +60 °C)
Storage (EN 60721-3-1) > 6 months			1K3 (temperature: -25 °C ... +40 °C)
Transport (EN 60721-3-2)			2K3 (temperature: -25 °C ... +70 °C)
Operation (EN 60721-3-3)			3K3 (temperature: -10°C ... +55°C)
Current derating at over 40°C			2.5 % / K
Site altitude			
Amsl	H_{max}	[m]	4000
Current derating at over 1000 m		[%/1000 m]	5
Vibration resistance			
Transport (EN 60721-3-2)			2M2
Operation (EN 61800-5-1)			10 Hz ≤ f ≤ 57 Hz: ±0.075 mm amplitude, 57 Hz ≤ f ≤ 150 Hz: 1.0 g
Operation (Germanischer Lloyd)			5 Hz ≤ f ≤ 13.2 Hz: ± 1 mm amplitude 13.2 Hz ≤ f ≤ 100 Hz: 0.7 g

Mode	
Product	Servo-Inverter i700
Supply form	
	Systems with earthed star point (TN and TT systems) Systems with high-resistance or isolated star point (IT systems)
Mains switching	
	Cyclic mains switching of 5 times in 5 minutes is permissible without restrictions.
Noise emission	
EN 61800-3	Cable-guided disturbance: According to category C1 with special measures According to category C2 with standard accessories According to category C3 without additional measures
Insulation resistance	
EN 61800-5-1	Overvoltage category III Above 2000 m amsl overvoltage category II
Degree of pollution	
EN 61800-5-1	2
Shock current	
EN 61800-5-1	> 3.5 mA AC, > 10 mA DC
Protective insulation of control circuits	
EN 61800-5-1	Safe mains isolation: double/reinforced insulation



Rated data for single axes

					
Max. short-time output current					
	$I_{max, out}$	[A]	5.0	10.0	20.0
Product key					
			E70ACMS□0054SA1ET□	E70ACMS□0104SA1ET□	E70ACMS□0204SA1ET□
DC supply					
	U_{DC}	[V]	DC 260 V -0 % ... 775 V +0 %		
Typical motor power					
4-pole asynchronous motor	P	[kW]	0.75	1.50	4.00
Rated output current					
	$I_{N, out}$	[A]	2.5	5.0	10.0
Rated switching frequency					
	f_{ch}	[kHz]	4		
Output current					
4 kHz	I_{out}	[A]	2.5	5.0	10.0
8 kHz	I_{out}	[A]	2.5	5.0	10.0
16 kHz	I_{out}	[A]	1.5	3.0	6.0
Power loss					
	P_V	[W]	50.0	80.0	130

4.6

Dimensions and weights

Standard installation design

Dimensions			
Height	h	[mm]	350
Height, including fastening	h	[mm]	410
Width	b	[mm]	50
Depth	t	[mm]	261
Mass			
	m	[kg]	2.7



Rated data for single axes

					
Max. short-time output current					
	$I_{max, out}$	[A]	32.0	48.0	64.0
Product key					
			E70ACMS□0324SA1ET□	E70ACMS□0484SA1ET□	E70ACMS□0644SA1ET□
DC supply					
	U_{DC}	[V]	DC 260 V -0 % ... 775 V +0 %		
Typical motor power					
4-pole asynchronous motor	P	[kW]	7.50	11.0	15.0
Rated output current					
	$I_{N, out}$	[A]	16.0	24.0	32.0
Rated switching frequency					
	f_{ch}	[kHz]	4		
Output current					
4 kHz	I_{out}	[A]	16.0	24.0	32.0
8 kHz	I_{out}	[A]	12.8	19.2	25.6
16 kHz	I_{out}	[A]	9.6	14.4	19.2
Power loss					
	P_V	[W]	210	290	390

Dimensions and weights

Standard installation design

Dimensions			
Height	h	[mm]	350
Height, including fastening	h	[mm]	410
Width	b	[mm]	100
Depth	t	[mm]	261
Mass			
	m	[kg]	5.2



Rated data for double axes

				
Max. short-time output current				
	$I_{max, out}$	[A]	5.0	10.0
Product key				
			E70ACMS□0054SA2ET□	E70ACMS□0104SA2ET□
DC supply				
	U_{DC}	[V]	DC 260 V -0 % ... 775 V +0 %	
Typical motor power				
4-pole asynchronous motor	P	[kW]	0.75	1.50
Rated output current				
	$I_{N, out}$	[A]	2.5	5.0
Rated switching frequency				
	f_{ch}	[kHz]	4	
Output current				
4 kHz	I_{out}	[A]	2.5	5.0
8 kHz	I_{out}	[A]	2.5	5.0
16 kHz	I_{out}	[A]	1.5	3.0
Power loss				
	P_V	[W]	90.0	140

4.6

Dimensions and weights

Standard installation design

Dimensions			
Height	h	[mm]	350
Height, including fastening	h	[mm]	410
Width	b	[mm]	50
Depth	t	[mm]	261
Mass			
	m	[kg]	2.9



Rated data for double axes

				
Max. short-time output current				
	$I_{max, out}$	[A]	20.0	32.0
Product key				
			E70ACMS□0204SA2ET□	E70ACMS□0324SA2ET□
DC supply				
	U_{DC}	[V]	DC 260 V -0 % ... 775 V +0 %	
Typical motor power				
4-pole asynchronous motor	P	[kW]	4.00	7.50
Rated output current				
	$I_{N, out}$	[A]	10.0	16.0
Rated switching frequency				
	f_{ch}	[kHz]	4	
Output current				
4 kHz	I_{out}	[A]	10.0	16.0
8 kHz	I_{out}	[A]	10.0	12.8
16 kHz	I_{out}	[A]	6.0	9.6
Power loss				
	P_V	[W]	260	370

Dimensions and weights

Standard installation design

Dimensions				
Height	h	[mm]	350	350
Width	b	[mm]	100	100
Depth	t	[mm]	261	261
Mass				
	m	[kg]	5.2	5.2



Rated data for power supply modules

► The data is valid for operation at 3/PE AC 400 V.

				
Product key				
Power supply module			E70ACPS□0304S	E70ACPS□0604S
Rated power				
With mains filter/mains choke	P_N	[kW]	15.4	30.9
Without mains filter/mains choke	P_N	[kW]	10.3	20.6
Max. short-term output power				
	$P_{max, 2}$	[kW]	20.6	41.2
Mains voltage range				
	U_{AC}	[V]	3/PE AC 320 V -0% ... 528 V +0%, 45 Hz -0% ... 65 Hz +0%	
Rated mains current				
	$I_{N, AC}$	[A]	24.5	49.0
Rated DC-bus current				
	$I_{N, DC}$	[A]	30.0	60.0
Max. DC-bus current				
	I_{max}	[A]	45.0	90.0
Power loss				
	P_V	[W]	60.0	110

4.6

Brake chopper rated data

Rated power, Brake chopper				
	P_N	[kW]	4.1	10.1
Max. output power, Brake chopper				
	$P_{max, 1}$	[kW]	26.8	65.5
Running time				
	t_{on}	[s]	15.0	
Recovery time				
	t_{re}	[s]	82.0	
Min. brake resistance				
	R_{min}	[Ω]	22.0	9.0

Dimensions and weights

Standard installation design

Dimensions				
Height	h	[mm]	350	
Height, including fastening	h	[mm]	410	
Width	b	[mm]	50	100
Depth	t	[mm]	261	
Mass				
	m	[kg]	2.8	5.8





"Cold plate" design

Inverters in cold-plate design dissipate some of their waste heat (heat loss) via a cooler adapted to the application. For this purpose, the inverters are provided with a planed cooling plate which is connected to a separate cooler in a thermally conductive way. Using the cold plate technology, the main part of the heat energy can be transferred directly to the external cooling units.

The use of cold-plate technology is advantageous for the following application cases:

- Minimising the expense of cooling the control cabinet. Here, the main part of the power loss is directly transferred to a cooling unit outside of the control cabinet, e.g. convection cooler or water cooler.
- Heavily polluted ambient air or control cabinets with a high degree of protection which do not allow for a use of a forced air cooling of the control cabinets.
- Low mounting depth in the control cabinet.

Requirements for the cooler

When cold-plate technology is used, the following basic conditions must be considered:

- Good thermal connection to the external cooling unit, i.e. the implementation of the heat transfer resistance (Rth) according to the power loss.
- The contact surface must at least be as big as the cooling plate of the inverter.
- The planarity of the contact surface must not exceed 0.05 mm.
- The contact surface of the external coolers and cooling plate must be connected by means of the intended screwed connection.
- The maximum temperature of the cooling plate of the inverter ((75 °C) must not be exceeded.

Single axes

Product key	Power to be dissipated	Thermal resistance
Inverter		
	P_V	R_{th}
	[W]	[K/W]
E70ACMS□0054SA1ET□	25.0	≤ 1.6
E70ACMS□0104SA1ET□	50.0	≤ 0.8
E70ACMS□0204SA1ET□	95.0	≤ 0.45
E70ACMS□0324SA1ET□	140	≤ 0.25
E70ACMS□0484SA1ET□	215	≤ 0.2
E70ACMS□0644SA1ET□	290	≤ 0.15

Double axes

Product key	Power to be dissipated	Thermal resistance
Inverter		
	P_V	R_{th}
	[W]	[K/W]
E70ACMS□0054SA2ET□	50.0	≤ 0.8
E70ACMS□0104SA2ET□	95.0	≤ 0.45
E70ACMS□0204SA2ET□	185	≤ 0.2
E70ACMS□0324SA2ET□	275	≤ 0.15

Power supply modules

Product key	Power to be dissipated	Thermal resistance
Power supply module		
	P_V	R_{th}
	[W]	[K/W]
E70ACPS□0304S	45.0	≤ 0.95
E70ACPS□0604S	85.0	≤ 0.45



"Cold plate" design

Dimensions and weights

Single axes

Product key			E70ACMS□0054SA1ET□	E70ACMS□0104SA1ET□	E70ACMS□0204SA1ET□
Dimensions					
Height, including fastening	h	[mm]	410		
Width	b	[mm]	50		
Depth	t	[mm]	221		
Mass					
	m	[kg]	2.3		

Product key			E70ACMS□0324SA1ET□	E70ACMS□0484SA1ET□	E70ACMS□0644SA1ET□
Dimensions					
Height, including fastening	h	[mm]	410		
Width	b	[mm]	100		
Depth	t	[mm]	221		
Mass					
	m	[kg]	5.3		

Double axes

Product key			E70ACMS□0054SA2ET□	E70ACMS□0104SA2ET□	E70ACMS□0204SA2ET□	E70ACMS□0324SA2ET□
Dimensions						
Height, including fastening	h	[mm]	410			
Width	b	[mm]	50		100	
Depth	t	[mm]	221			
Mass						
	m	[kg]	2.5		5.3	

Power supply modules

Product key			E70ACPS□0304S	E70ACPS□0604S
Dimensions				
Height, including fastening	h	[mm]	410	
Width	b	[mm]	50	100
Depth	t	[mm]	221	
Mass				
	m	[kg]	2.6	5.6



Push-through technique design

The inverters in push-through design reduce the waste heat in the control cabinet.
The inverter is mounted in the control cabinet so that the heatsink on the inverter is outside the control cabinet. Thus, the entire waste heat can be dissipated outside the control cabinet via convection or forced air cooling for almost all device performances.

Using the push-through technology is advantageous in the following application cases:

- Minimising the expense for control cabinet cooling. For this purpose, the main part of the power loss is directly transferred to the ambience outside the control cabinet,e.g. convection cooling.
- In case of control cabinets with a high degree of protection > IP54 by using separate mounting and cooling areas.
- Low mounting depth in the control cabinet.

Single axes

Product key	Power to be dissipated
Inverter	
	P_V
	[W]
E70ACMS□0054SA1ET□	25.0
E70ACMS□0104SA1ET□	50.0
E70ACMS□0204SA1ET□	95.0
E70ACMS□0324SA1ET□	140
E70ACMS□0484SA1ET□	215
E70ACMS□0644SA1ET□	290

Double axes

Product key	Power to be dissipated
Inverter	
	P_V
	[W]
E70ACMS□0054SA2ET□	50.0
E70ACMS□0104SA2ET□	95.0
E70ACMS□0204SA2ET□	185
E70ACMS□0324SA2ET□	275

Power supply modules

Product key	Power to be dissipated
Power supply module	
	P_V
	[W]
E70ACPS□0304S	45.0
E70ACPS□0604S	85.0



Push-through technique design

Dimensions and weights

Single axes

Product key			E70ACMS□0054SA1ET□	E70ACMS□0104SA1ET□	E70ACMS□0204SA1ET□
Dimensions					
Height, including fastening	h	[mm]	410		
Width	b	[mm]	50		
Depth (in control cabinet)	t	[mm]	221		
Mass					
	m	[kg]	3.0		

Product key			E70ACMS□0324SA1ET□	E70ACMS□0484SA1ET□	E70ACMS□0644SA1ET□
Dimensions					
Height, including fastening	h	[mm]	410		
Width	b	[mm]	100		
Depth (in control cabinet)	t	[mm]	221		
Mass					
	m	[kg]	7.1		

Double axes

Product key			E70ACMS□0054SA2ET□	E70ACMS□0104SA2ET□	E70ACMS□0204SA2ET□	E70ACMS□0324SA2ET□
Dimensions						
Height, including fastening	h	[mm]	410			
Width	b	[mm]	50		100	
Depth	t	[mm]	261			
Mass						
	m	[kg]	3.2		7.1	

Power supply modules

Product key			E70ACPS□0304S	E70ACPS□0604S
Dimensions				
Height, including fastening	h	[mm]	410	
Width	b	[mm]	50	100
Depth (in control cabinet)	t	[mm]	221	
Mass				
	m	[kg]	2.8	5.8





Mains connection

Interference voltage categories according to the European standard EN 61800-3 are divided into category C1, C2 and the category C3.

Category C1
- Describes the use in public networks.

Category C2
- Describes the use of devices intended for industrial purposes in areas also comprising residential areas.

Category C3
- Describes the use of devices intended for industrial purposes only.

26 - The interference voltage categories achievable due to the filter measures are shown in conjunction with the motor cables.

With an upstream mains choke or mains filter, the maximum continuous power of the power supply modules can be used since the effective current will be reduced.
If no filter or an RFI filter is used, the permissible continuous power (rated power) of the power supply module is reduced.
The mains choke and the RFI filter can also be combined without any restrictions.

35 - Mains chokes, RFI filters, Mains filters

Mains fuses and cable cross-sections

- ► The mains fuse and cable cross-section specifications are for a mains connection of 3AC 400 V or 3AC 480 V.
- ► Class gG/gl fuses or class gRL semiconductor fuses.
- ► The cable cross-sections apply to PVC-insulated copper cables.
- ► Use for installation with UL-approved cables, fuses and brackets.

Rated power	Mains voltage	Product key	Circuit breaker	Fuse		Mains connection
		Power supply module		EN 60204-1	UL[1]	Cross-section (with mains choke)
P_N	U_{AC}		I	I	I	q
[kW]	[V]		[A]	[A]	[A]	[mm2]
15.4	3 AC 320 ... 528	E70ACPS□0304S	C40	40		10.0
30.9		E70ACPS□0604S	C63	63		16.0

[1] In preparation.



Motor connection

- ► Electric strength of the motor cable: 1 kV as per VDE 250-1.
- ► Keep motor cables as short as possible, as this has a positive effect on the drive behaviour.
- ► Maximum motor cable length 50 m per axis.
- ► With group drives (multiple motors on one inverter), the resulting cable length is the key factor. This can be calculated using the hardware manual.

Motor cable lengths and interference voltage categories

When using the i700 system, use external filters to comply with the EMC Directives.

Category C1
- With special measures; please contact your Lenze sales office.

Category C2
- With RFI filters, 6 axes each with 50 m motor cable
- With mains filters, 10 axes each with 50 m motor cable

Category C3
- Without external measures, 4 axes each with 50 m motor cable
- With mains choke, 10 axes each with 50 m motor cable

4.6

35 - Mains chokes, RFI filters, Mains filters




Motor connection

The following diagrams show the possible number of axes and the possible sum of motor cable lengths to ensure compliance with interference suppression according to the categories.


► Number of axes (n) / sum of the motor cable length (l)

Category C2

With RFI filters

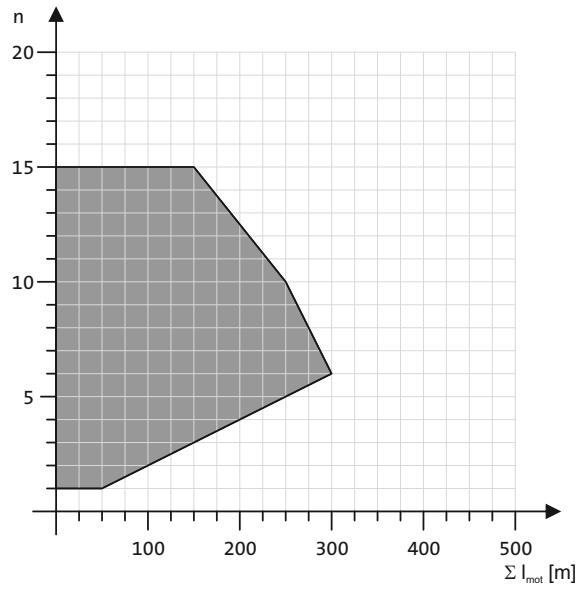


With mains filters

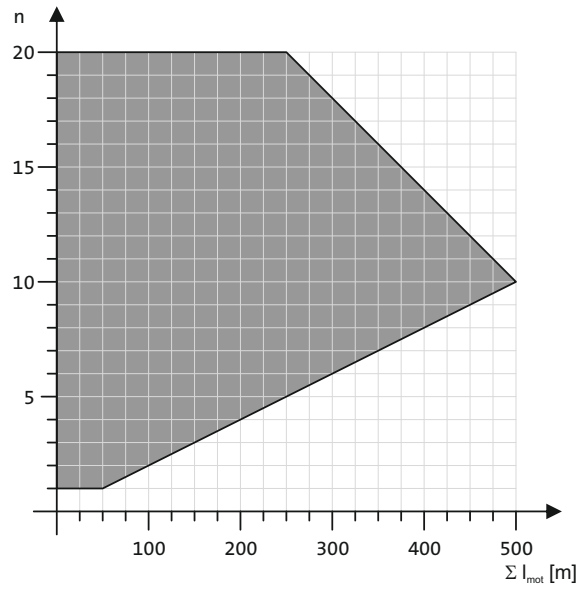


Category C3

Without external measures

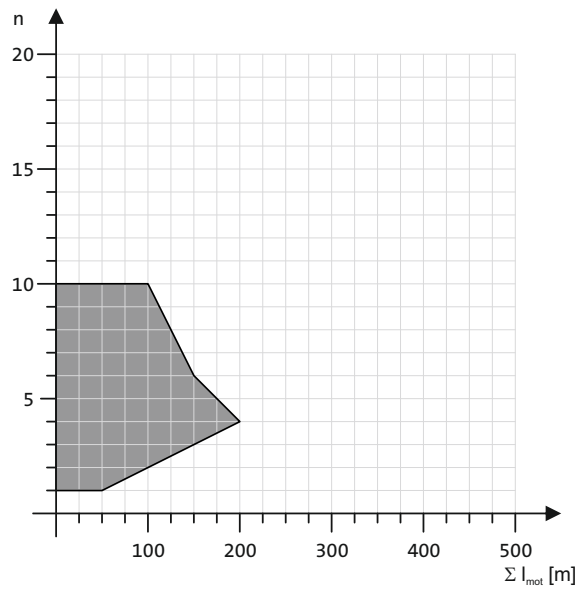


With mains chokes

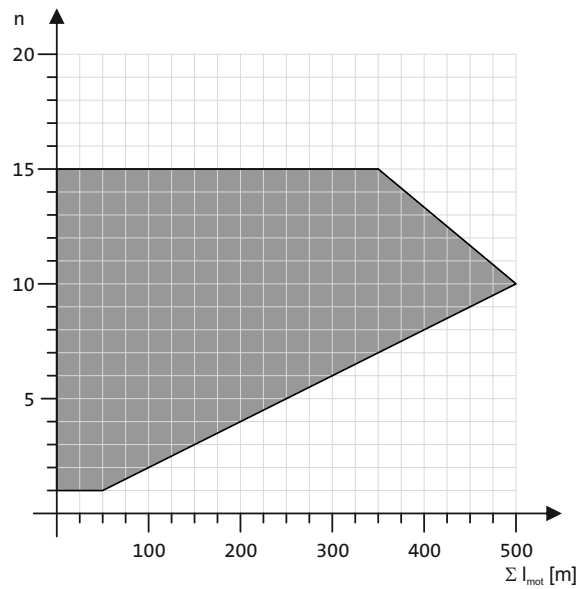

Connection diagrams


Servo-Inverter i700 wiring example, axis modules

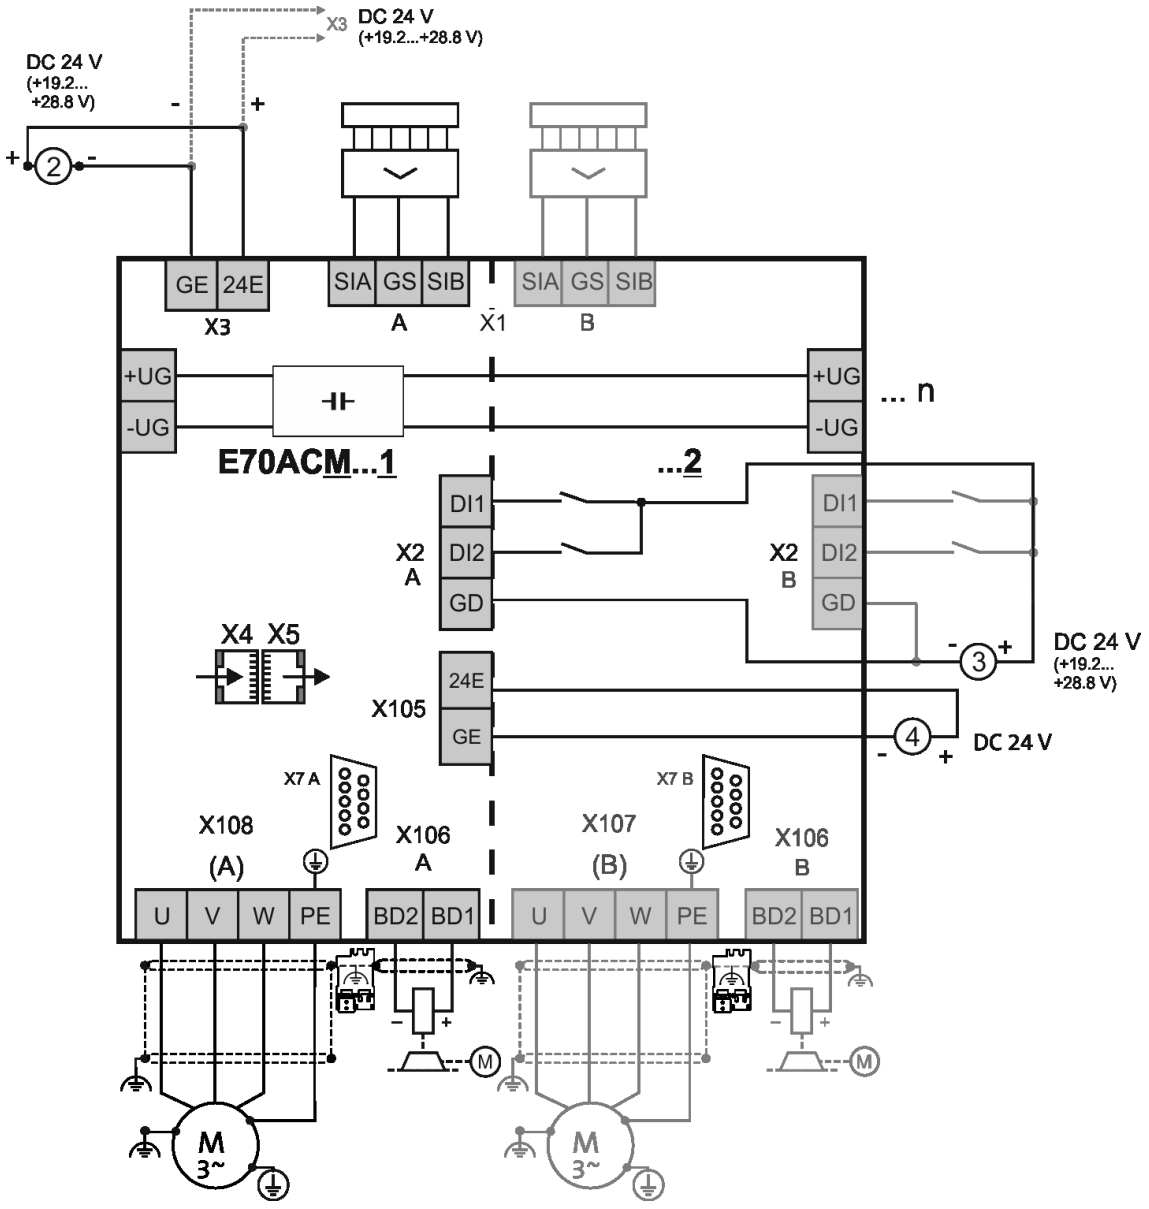

[2] 24 supply for control electronics
[3] 24 V supply for digital inputs
[4] 24 V supply for motor holding brake(s)

Connection diagrams

Servo-Inverter i700 wiring example, power supply modules

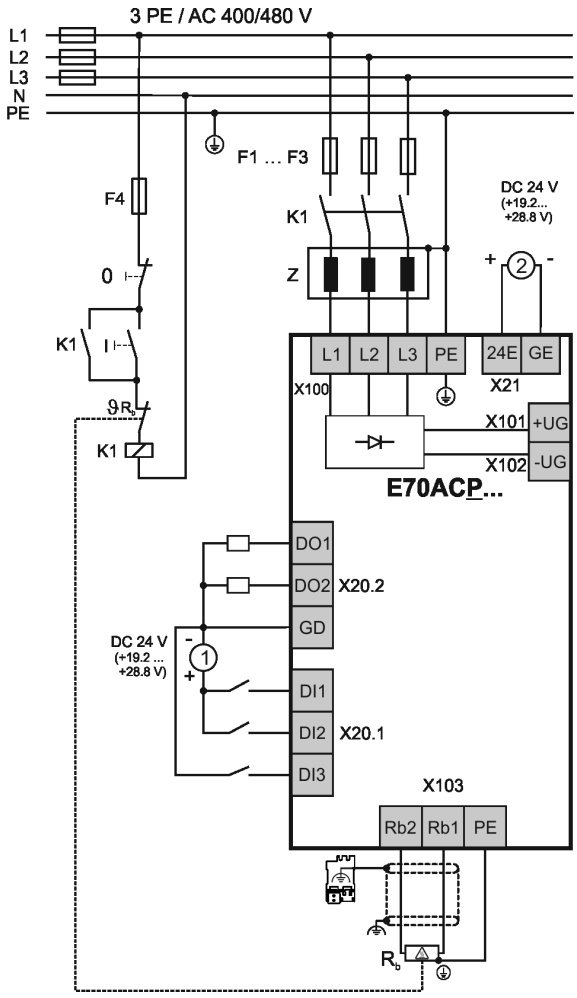

[1] 24 V supply for digital inputs
[2] 24 V supply for control electronics




Control connections


Mode	
	Servo-Inverter i700
Digital inputs	
Number	2
Touch-probe-capable	2 with time and position stamp
Switching level	PLC (IEC 61131-2)
Max. input current	8 mA
External DC supply	
Rated voltage	24 V in accordance with IEC 61131-2
Voltage range	19.2 ... 28.8 V, max. residual ripple ± 5%
Interfaces	
EtherCAT	2 (in/out)
Safety engineering	Safe torque off (STO) 2 channel design
Drive interface	
Resolver input	Sub-D, 9-pin
Encoder input	Sub-D, 15-pin SinCos absolute value encoder single-turn (with zero pulse) or multi-turn (Hiperface®)
Motor brake	24V holding brake per axis can be directly controlled

4.6


Connection of digital inputs

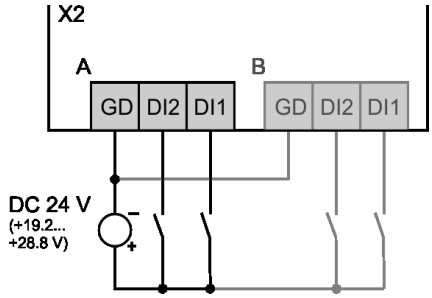

Safety engineering connection

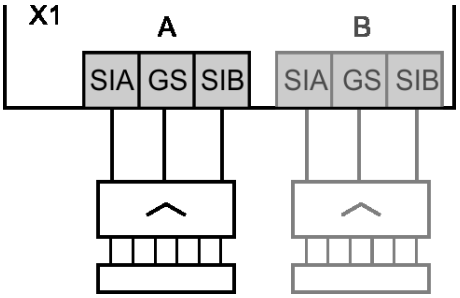

Motor brake connection

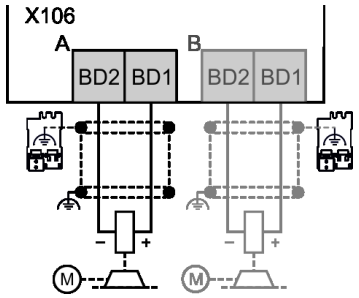



Control connections

External 24 V supply

The control electronics of the Servo-Inverter i700 has to be supplied with an external 24-V supply. For this purpose, Lenze provides power supply units. The following table shows the corresponding current consumptions of the devices.

38 - 24 V power supply unit

Single axes

Max. short-time output current	Product key	External DC supply
		Current
$I_{max, out}$		
[A]		
5.0	E70ACMS□0054SA1ET□	1.0 A
10.0	E70ACMS□0104SA1ET□	
20.0	E70ACMS□0204SA1ET□	
32.0	E70ACMS□0324SA1ET□	2.0 A
48.0	E70ACMS□0484SA1ET□	
64.0	E70ACMS□0644SA1ET□	

Double axes

Max. short-time output current	Product key	External DC supply
		Current
$I_{max, out}$		
[A]		
5.0	E70ACMS□0054SA2ET□	1.0 A
10.0	E70ACMS□0104SA2ET□	
20.0	E70ACMS□0204SA2ET□	2.0 A
32.0	E70ACMS□0324SA2ET□	



Safety system (STO)

By default, the Servo-Inverter i700 are available with the "safe torque off, STO" safety function. This helps reduce the control system costs, save space in the control cabinet and keep wiring to a minimum. The safety engineering is certified according to EN ISO 13849-1 (Cat. 4, PL e), EN 61508/EN 62061 (SIL 3). A "safe stop 1, SS1" can be implemented easily using a safety switching device.

The product key of the inverter has an "**A**".
as the 14th character. For example, a servo inverter 5A, built-in unit with safety engineering would be: E70ACMSE0054S**A**ETR



Double axis with connections for safety engineering



EtherCAT® communication

EtherCAT enables the Servo-Inverter i700 to be controlled with digital control signals via the EtherCAT® bus system. It is integrated in the Servo-Inverter i700. It can be seen in the product key at the positions 16 and 17: E70ACM□□□□4SA□**ET**□.

The advantages of the system are:
- quick and very powerful bus system
- ideally suited for Controller-based Automation solutions
- easy system integration since a wide range of sensors and actuator is available on the market.
- the basic features of a servo drive are available in the axes according to the device profile and can be easily used via the EtherCAT®.

Mode	Features
Communication	
EtherCAT [1)]	• CANopen over EtherCAT (CoE) • Distributed clock • 2 RJ45 connections with LEDs for link and activity

1) EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

Technical data

Product key			
			E70ACM□□□□4SAxET□
Communication			
Medium			CAT5e S/FTP according to ISO/ICE11801 (2002)
Communication profile			CoE (CANopen over EtherCAT)
Baud rate			
	b	[MBit/s]	100
Node			
			Slave
Network topology			
			Line (internal ring)
Number of logical process data channels			
			1
Process data words (PCD)			
16 Bit			1 ... 32
Number of bus nodes			
			Max. 65535
Max. cable length			
between two nodes	l_{max}	[m]	100
Rated voltage			
	$U_{N, DC}$	[V]	24.0



Brake resistors for power supply modules

The assignment of brake resistors to the power supply modules is shown in the following tables.



Brake resistor 27 ohms

Product key		Rated resistance	Rated power	Thermal capacity	Dimensions	Mass
Power supply module	Brake resistor					
		R_N	P_N	C_{th}	h x b x t	m
		[Ω]	[kW]	[KWs]	[mm]	[kg]
E70ACPS□0304S	ERBP027R200W	27.0	200.0	30.0	320 x 41 x 122	1.0
	ERBS027R600W		600.0	90.0	550 x 110 x 105	3.1
	ERBS027R01K2		1200.0	180	1020 x 110 x 105	5.6
E70ACPS□0604S	ERBG012R01K9	12.0	1900.0	285	486 x 236 x 302	13.0
	ERBG012R05K2		5200.0	750	486 x 426 x 302	28.0



Mains chokes for power supply modules

A mains choke is an inductive resistor which is connected in the mains cable of the power supply module. The use of a mains choke provides the following advantages:

- **Fewer effects on the mains:**
  The wave form of the mains current is a close approximation to a sine wave.
- **Reduction in the effective mains current:**
  Reduction of mains, cable and fuse loads
- **Current balancing of power supply modules connected in parallel**

Mains chokes can be used without restrictions in conjunction with RFI filters.



Mains choke


Please note:
The use of a mains choke slightly reduces the mains voltage at the input of the power supply module – the typical voltage drop across the mains choke at the rated values is around 5%.
The selection of the correct mains chokes for the power supply modules depends on the number of connected axes. For this purpose, different mains chokes are available. For the following efficiencies of the power supply modules, we have dimensioned model mains chokes:

- Power supply modules for 30 A operation with rated data
- Power supply modules for 60 A operation with rated data

Product key		Output power	Rated current	Dimensions	Mass
Power supply module	Mains choke	at 400 V			
		P_{out}	I_N	h x b x t	m
		[kW]	[A]	[mm]	[kg]
E70ACPS□0304S	EZAELN3025B122	15.4	25.0	110 x 155 x 167	5.8
E70ACPS□0604S	EZAELN3050B591	30.9	50.0	112 x 185 x 208	8.4

The following diagram shows the possible number of axes and the possible sum of motor cable lengths to ensure compliance with interference suppression according to category C3.

Number of axes (n) / sum of the motor cable length (l)

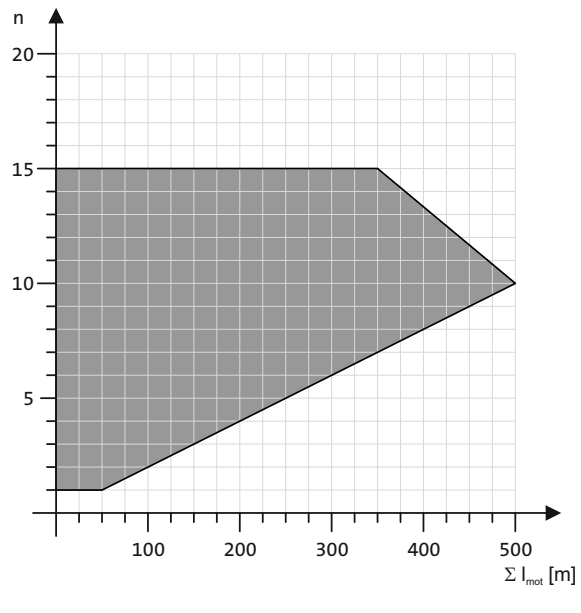



Interference suppression of power supply modules

RFI filters

RFI filters are primarily capacitive accessory components which can be connected directly upstream from the power supply modules. This measure enables compliance with the corresponding conducted noise emission requirements according to EN 61800-3.




RFI filter, can be mounted beside the power supply module

Product key		Output power	Rated current	Power loss	Max. cable length	Dimensions	Mass
Power supply module	RFI filter	at 400 V			Reference group C2		
		P_{out}	I_N	P_V	l_{max}	h x b x t	m
		[kW]	[A]	[kW]	[m]	[mm]	[kg]
E70ACPS□0304S	E94AZRP0084	3.60	8.00	20.0	6 axes of 50 m each	485 x 60 x 261	4.2
	E94AZRP0294	10.3	29.0	50.0			4.5
E70ACPS□0604S	E94AZRP0824	20.6	82.0	80.0		490 x 209 x 272	18.5

The following diagram shows the possible number of axes and the possible sum of motor cable lengths to ensure compliance with interference suppression according to category C2.

Number of axes (n) / sum of the motor cable length (l)

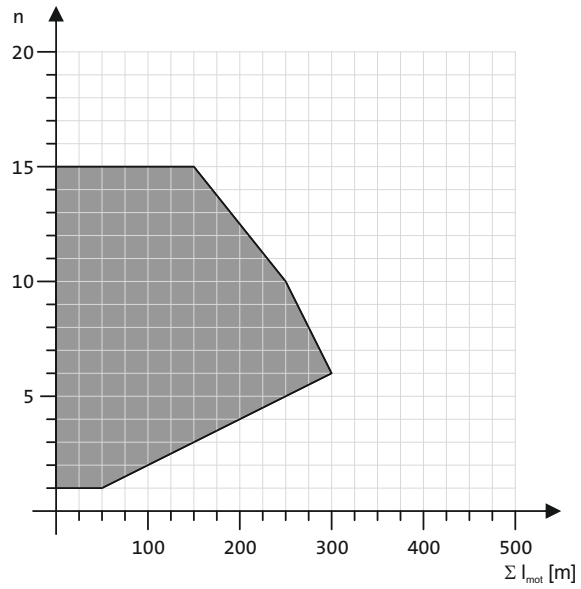



Interference suppression of power supply modules

Mains filters


A mains filter is a combination of mains choke and RFI filter in one housing. It reduces the conducted interference emission into the mains in order that the conducted interference voltage is reduced to the area permissible according EN61800-3.
This results in the following advantages:

- Fewer effects on the mains:
  The wave form of the mains current is a close approximation to a sine wave.
- Reduction in the effective mains current:
  Reduction of mains, cable and fuse loads
- Current balancing when power supply modules are connected in parallel

Product key		Output power	Rated current	Voltage drop	Max. cable length	Dimensions	Mass
Power supply module	Mains filter	at 400 V			Reference group C2		
		P_{out}	I_N	U	I_{max}	h x b x t	m
		[kW]	[A]	[V]	[m]	[mm]	[kg]
E70ACPS□0304S	E94AZMP0084	4.90	8.00	10.0	10 axes of 50 m each	485 x 90 x 261	8.6
	E94AZMP0294	15.4	29.0	7.3		485 x 120 x 261	16.5
E70ACPS□0604S	E94AZMP0824	30.6	82.0	6.4		490 x 270 x 272	29.0

The following diagram shows the possible number of axes and the possible sum of motor cable lengths to ensure compliance with interference suppression according to category C2.

Number of axes (n) / sum of the motor cable length (l)

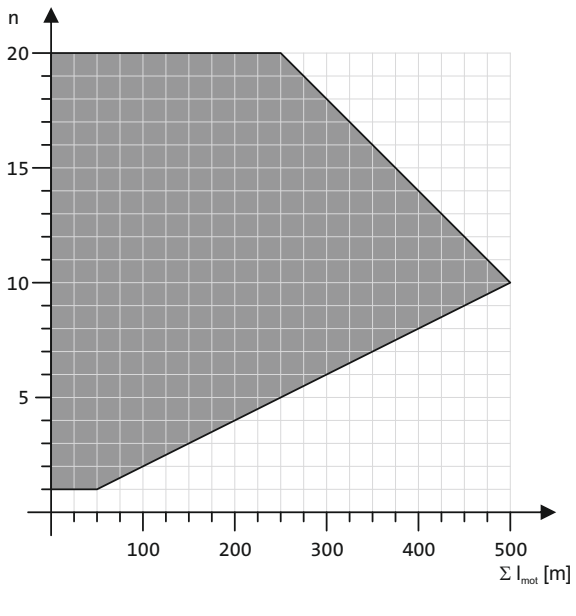



24 V power supply unit

The control electronics of the axis and power supply modules must be supplied by external 24-V power supply units. For this purpose, various power supply units are available. The power supply units can be supplied with AC voltage and DC voltage from the DC bus of the drive system. This ensures a continuous supply of the electronics in case of mains failure to ensure a controlled braking process.

Electrical isolation
The i700 components have a "save separation" between mains and electronic potential according to IEC 61131–2. For maintaining this feature, the successive power supply units can be used with SELV (Safety Extra Low Voltage) or PELF (Protective Extra Low Voltage).



24 V power supply unit

Product key			EZV1200-000	EZV2400-000	EZV4800-000	EZV1200-001	EZV2400-001	EZV4800-001
Rated voltage								
AC	$U_{N, AC}$	[V]	230			400		
Input voltage								
	U_{in}	[V]	AC 85 ... 264 DC 90 ...350			AC 320 ... 575 DC 450 ...800		
Rated mains current								
	$I_{N, AC}$	[A]	0.8	1.2	2.3	0.3	0.6	1.0
Output voltage								
	U_{out}	[V]	DC 22.5 ...28.5					
Rated output current								
	$I_{N, out}$	[A]	5.0	10.0	20.0	5.0	10.0	20.0
Dimensions								
Height	h	[mm]	130					
Width	b	[mm]	55	85	157	73	85	160
Depth	t	[mm]	125					
Mass								
	m	[kg]	0.8	1.2	2.5	1.0	1.1	1.9

4.6

Installation sets for Servo-Inverter i700

The installation sets include:
- All plug-in terminals
- Shield sheets plus shield terminals
- EtherCAT® cable (100 mm) for connecting the next axis

Mode	**Features**	**Product key**
Installation set for single axes	• For axes 5 to 20 A	E70AZEVK001
	• For axes 32 to 64 A	E70AZEVK003
Installation set for double axes	• For axes 5 to 10 A	E70AZEVK002
	• For axes 20 to 32 A	E70AZEVK004
Installation set for power supply modules	• For power supply module 30 A	E70AZEVK005
	• For power supply module 60 A	E70AZEVK006
	• For parallel connection	E70AZEVK007





Engineering Tools

PLC Designer



Product information


Control in line with the IEC 61131-3 industry standard

The control is based on the modern CoDeSys control system 3. Lenze qualified this basic system for continuous operation in automation systems and then extended and modified it to meet its requirements. It is marketed under the name PLC Designer 3. Compared to the pure CoDeSys system, the timing has for example been optimised and adapted to the specific hardware in a way that guarantees optimised packing density for best possible utilisation of bus performance. In addition to this, the system has been extended to include a gateway function, which grants drive parameter setting programs such as L-force Engineer access through the controller to the connected field devices – a particularly useful system extension for EtherCAT®. However, the most important addition is integration of the I/O system 1000 in the control configuration.

The PLC Designer is offered in 4 different licence levels, although all licence levels have one thing in common:

The L-force Engineer and PLC Designer share one common licence. Any customers ordering one of the two products will therefore automatically also receive a license for the other product. The license key, which is required for installation of the software, is the same for both products.

Every L-force controller is also supplied with a CD which, among other things, includes the PLC Designer. This version is a demo version which can be used for 30 days. The full version can then be activated by simply entering an engineer key. New versions of the PLC Designer and updates are available for download on the Internet.

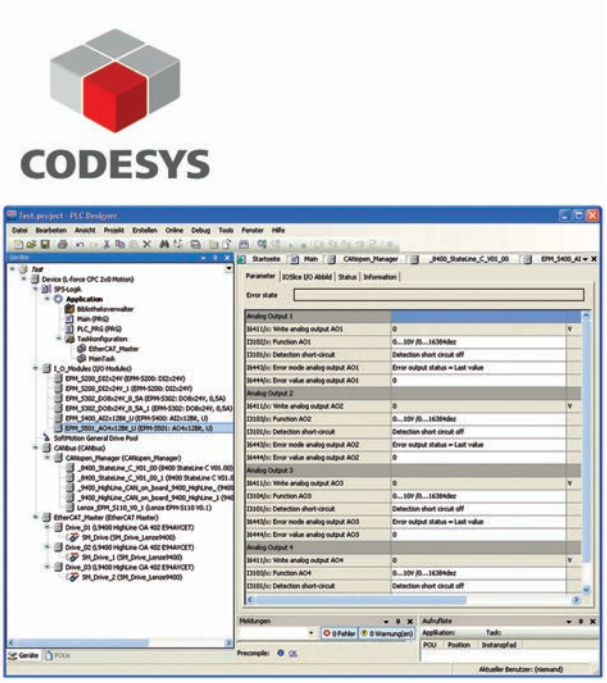


Mode	Features	Product key
PLC Designer 3.x		
Single user licence	• CD-ROM not included in scope of supply • Installation on one PC • Languages: German and English	ESPEVPDXA0EC1
Multiple user licence	• CD-ROM not included in scope of supply • Multiple installations on the number of machines for which licences have been purchased • The basis is a single user licence	ESPEVPDNNNML1
Corporate licence	• CD-ROM not included in scope of supply • Multiple installations within a company at one location • The basis is a single user licence	ESPEVPDNNNFL1
Buyout license	• CD-ROM not included in scope of supply • Issuing of sublicences in conjunction with Lenze drives installed in a machine • The basis is a single user licence	ESPEVPDNNNBL1

Product information


PLC Designer
Lenze uses the PLC Designer as the central engineering software for control technology. It is based on the familiar CoDeSys system and offers the following features:
- Programming of Logic & Motion in line with IEC 61131-3 (IL, LD, FP, ST, SFC and CFC Editor)
- Certified function blocks in line with PLCopen Part 1 + 2
- NC block library
- Graphic DIN 66025 Editor (G-Code) with DXF import
- Cam editor
- Object-oriented programming

For programming the Controller 3200 C, Version 3 of the PLC Designer is required.

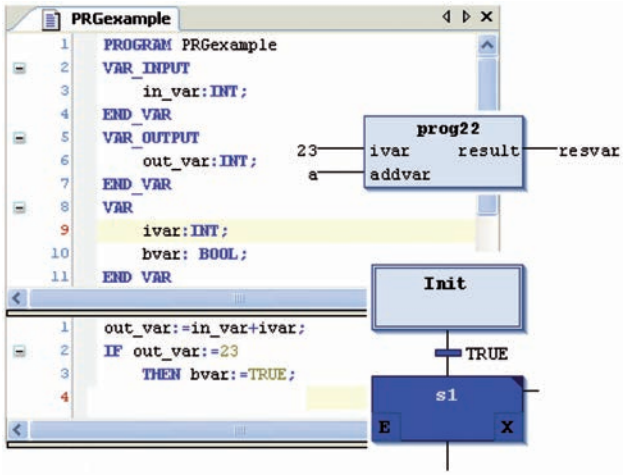

Web-based parameter setting
All controllers have an integrated web server with prepared pages for the following actions:
- Controller configuration and diagnostics
- Access to all logbook parameters
- Access to integrated controller logbook

This allows all key commissioning and diagnostic work to be performed without a separate PC application. A web browser is all that is needed.

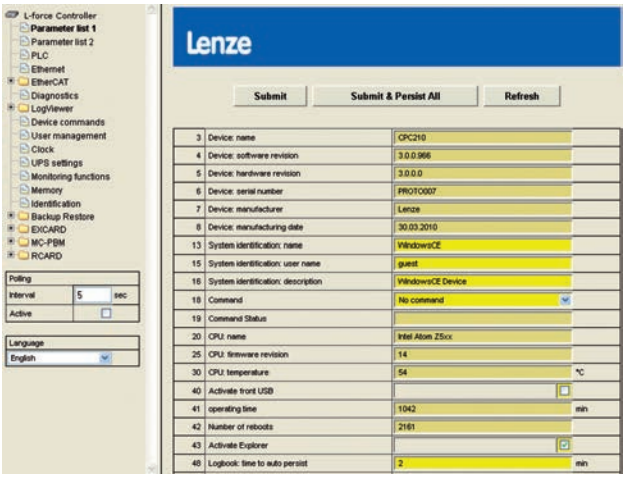

FAST modules
With the PLC Designer, the FAST modules (technology modules) can be programmed for the desired machine functions, which are organised in a library and can be conveniently adapted by means of a FAST application template. The use of these modules requires the "Application Credit" licence. More information can be found in the product sections.



Product information

Backup & Restore
Backup & Restore is a free of charge application that you can use to easily backup your controller:
- Perform backups
- Perform restores
- Perform updates

Backup & Restore is included on the CD that is supplied with every controller. Suitable USB flash drives can also be found under accessories.




PLC


PLC

Engineering Tools

VisiWinNET®





Product information



With the ever increasing complexity of machines, it is hard to imagine many modern installations without object-oriented systems for process visualisation. Visualisation or a human machine interface (HMI) – this is the interface between operators and machines. Visualisation applications are responsible for these tasks. The scope of requirements that these systems must meet is as diverse as the machines themselves. It ranges from machine-oriented HMIs for operator control + monitoring, all the way up to complex SCADA systems with the various stations as client or viewer. Support for all languages and fonts in unicode also secures the international application range of the system.


Based on the target system on which the VisiWinNET application is to run, various versions of the VisiWinNET runtime software can be used. The runtime software running on the target system has an influence on which version of the engineering software is required. Within the scope of Controller-based Automation, VisiWinNET® compact CE is used exclusively here.

In connection with industrial PCs from Lenze, advanced options are available when selecting the operating system and runtime software.

VisiWinNET® is available in two completely independent versions to allow different tasks to be performed independently and as effectively as possible.

VisiWinNET® Smart
VisiWinNET® Smart is a user-friendly visualisation system for basic interface design. As a flexible piece of software, it is particularly well suited to creating basic applications. VisiWinNET® Smart has its own integrated full-graphic development environment and supports users with predefined templates.
One special strength of the system lies in its ability to be combined with VisiWinNET® Professional.
VisiWinNET® Smart is used for machine-oriented applications and for basic B&B applications.

VisiWinNET® Professional
The VisiWinNET® Professional system is fully integrated into the Microsoft® Visual Studio .NET development environment.
The special efficiency of Lenze Visu VisiWinNET® really comes to the fore when VisiWinNET® Smart and Professional are combined.
VisiWinNET® Professional can be used to develop specific machine modules and control elements, which are then integrated in Smart using the VisiWinNET® Configurator for further processing.
Further fields for which VisiWinNET Professional can be used include database connections or comprehensive report functions, such as those used for producing FDA-compliant (Food and Drug Administration) machine operations.

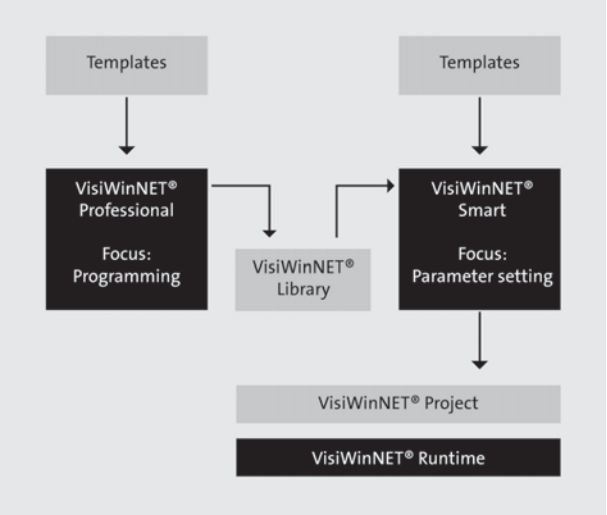

Product information

The combination of the two development systems VisiWinNET® Smart and Professional leads to a particularly efficient deployment range. VisWinNET® Professional can be used to develop specific machine modules and control elements, which are then integrated in Smart using the VisiWinNET® configurator for further processing.

This extremely convenient function allows users to define functions that are used again and again in line with their own specific requirements - this is the VisiWinNET® modular principle.

VisiWinNET® for Controller-based Automation

Mode	Features	Operating system of controller	Product key
VisiWinNET®			
Smart	• Single user license • Engineering Software operating system: Windows® XP, Windows® 7 • Licensing: USB dongle	Windows®CE	7710100065
Professional [1)]	• Single user license • Engineering Software operating system: Windows® XP, Windows® 7 • "MS Visual Studio .NET" 2008 is also required. • Licensing: USB dongle		

[1)] On request

► Delivery with USB dongle as a hardware copy protection.

Product information

Industrial PCs with VisiWinNET® as visualisation system, are provided with different operating systems. When ordering the VisiWinNET® engineering software, define the operating systems on the target system on which you want to use the software. This results in the required licence level. If VisiWinNET® is already available in a lower licence level, an upgrade licence can be used to increase the number of supported target system operating systems.

VisiWinNET® for industrial PCs

Mode	Features	Operating system of target	Product key
VisiWinNET®			
Smart	• Single user license • Engineering Software operating system: Windows® XP, Windows® 7 • Licensing: USB dongle	Windows® CE	7710100065
		Windows® CE Windows®Embedded	7710110065
		Windows® CE Windows®Embedded Windows® XP	7710120065
		Windows® CE Windows®Embedded Windows® XP Windows® XP client/server	7710130065
	• Upgrade from Windows® CE to XPe	Windows® CE Windows®Embedded	7710101065
	• Upgrade from Windows® XPe to XP	Windows® CE Windows®Embedded Windows® XP	7710111065
	• Upgrade from Windows® XP to XP Client/Server	Windows® CE Windows®Embedded Windows® XP Windows® XP client/server	7710131065
Professional [1)]	• Single user license • Engineering Software operating system: Windows® XP, Windows® 7 • "MS Visual Studio .NET" 2008 is also required. • Licensing: USB dongle	Windows® CE	
		Windows® CE Windows®Embedded	
		Windows® CE Windows®Embedded Windows® XP	
		Windows® CE Windows®Embedded Windows® XP Windows® XP client/server	
	• Upgrade from Windows® CE to XPe	Windows® CE Windows®Embedded	
	• Upgrade from Windows® XPe to XP	Windows® CE Windows®Embedded Windows® XP	
	• Upgrade from Windows® XP to XP Client/Server	Windows® CE Windows®Embedded Windows® XP Windows® XP client/server	

[1)] On request

► Delivery with USB dongle as a hardware copy protection.



15652839

Lenze SE
Hans-Lenze-Straße 1
D-31855 Aerzen
Phone: +49 (0)5154 82-0
Telefax: +49 (0)5154 82 28 00

www.Lenze.com